


File No. 182PC20237 SHEET 1/1

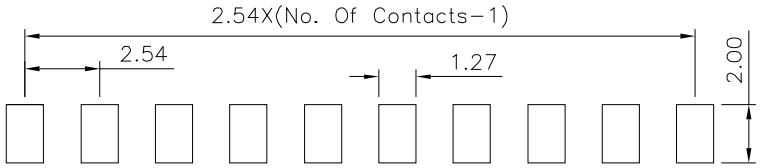


Recommended P.C.B. Layout



1X2P~1X36P




1X37P,1X38P,1X39P





1X40P

SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
⚠1 Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:2~40 Contacts
RoHS Compliant

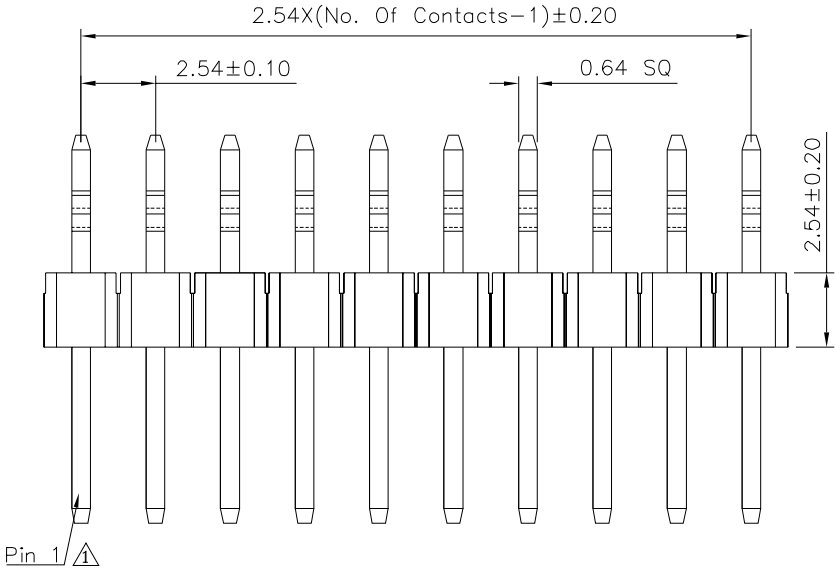

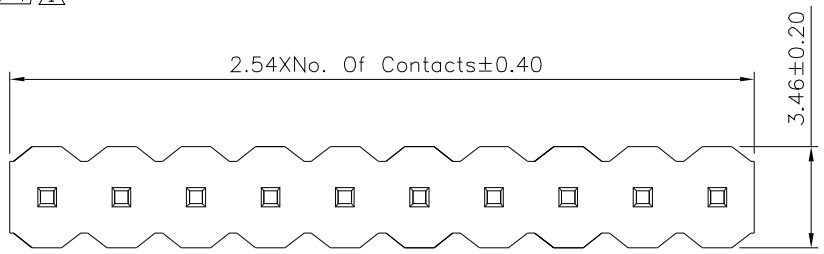

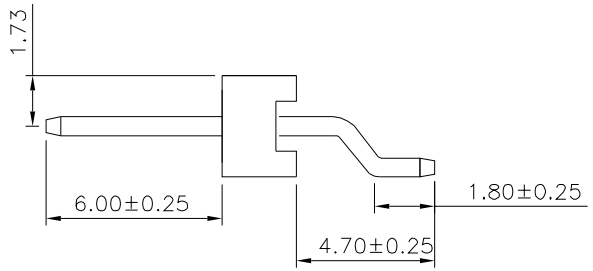

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. 13402		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX ±0.05				
		CHECKED BY HZF						
		DRAWING BY CYP						
SCALE	NONE	REV.	B1	UNIT mm				
					⚠1	B1	Modify Data	HZF	03/20/2025
					⚠0	B0	NEW RELEASE	HZF	10/16/2019
					NO.	REV.	REVISIONS	CHK	DATE