

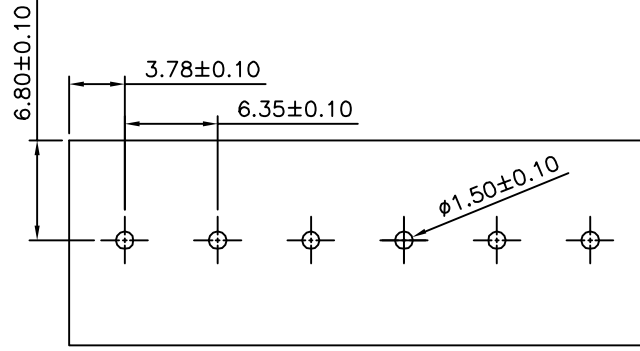


△ SPECIFICATION


Rated:13 Amperes,250V AC
 Withstand Voltage:2000V AC/Minute
 Insulation Resistance:>1000 Megaohms Or
 More At 500V DC
 Operation Temperature:-55°C~+110°C
 Screws Torque:7 In-Lb
 Wire Range:18~22 AWG
 RoHS Compliant

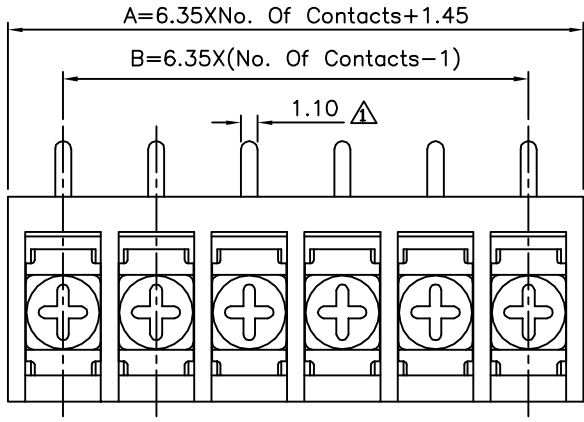

△ Recommended P.C.B. Layout

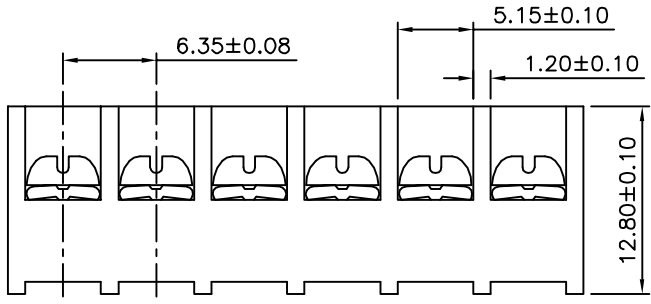

△

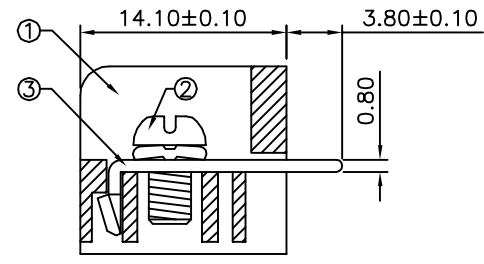

△

No.	Name	Material	Remark
①	Housing	PA66,UL94V-2	Black
②	Screw	Steel (M3.0)	Nickel Plated
③	Terminals	Brass	Tin Plated

Pin	A	B	Pin	A	B
2	14.15	6.35	18	115.75	107.95
3	20.5	12.7	19	122.1	144.3
4	26.85	19.05	20	128.45	120.65
5	33.2	25.4	21	134.8	127
6	39.55	31.75	22	141.15	133.35
7	45.9	38.1	23	147.5	139.7
8	52.25	44.45	24	153.85	146.05
9	58.6	50.8	25	160.2	152.4
10	64.95	57.15	26	166.55	158.75
11	71.3	63.5	27	172.9	165.1
12	77.65	69.85	28	179.25	171.5
13	83.7	76.2	29	185.6	177.8
14	90.35	82.55	30	191.95	184.2
15	96.7	88.9	31	198.3	190.5
16	103.05	95.25	32	204.7	196.9
17	109.4	101.6			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.5 .XX ±0.5 ANG. UNIT mm										
13608		EMILY												
		CHECKED BY HZF												
		DRAWING BY SONG		<table border="1"> <tr> <td>NO.</td> <td>REV.</td> <td>REVISIONS</td> <td>CHK</td> <td>DATE</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>	NO.	REV.	REVISIONS	CHK	DATE					
NO.	REV.	REVISIONS	CHK		DATE									
SCALE	NONE	REV.	A1											

△ A1	Modify Data	HZF	07/03/2012
△ A0	NEW RELEASE		