

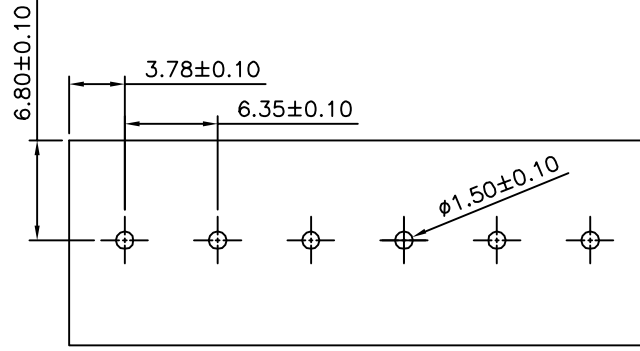
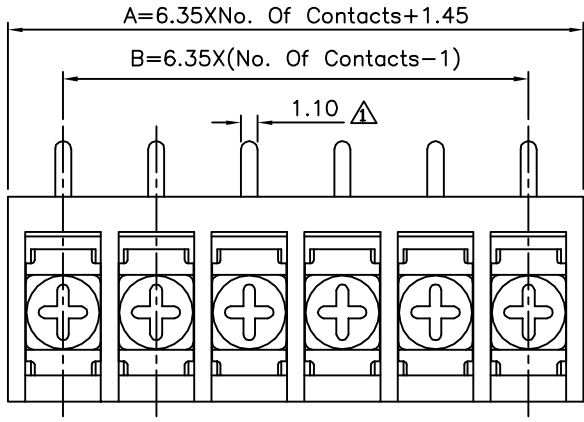


△ SPECIFICATION

Rated:13 Amperes,250V AC
 Withstand Voltage:2000V AC/Minute
 Insulation Resistance:>1000 Megaohms Or
 More At 500V DC
 Operation Temperature:-55°C~+110°C
 Screws Torque:7 In-Lb
 Wire Range:18~22 AWG
 RoHS Compliant

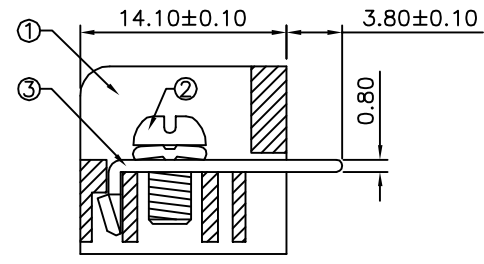

△ Recommended P.C.B. Layout

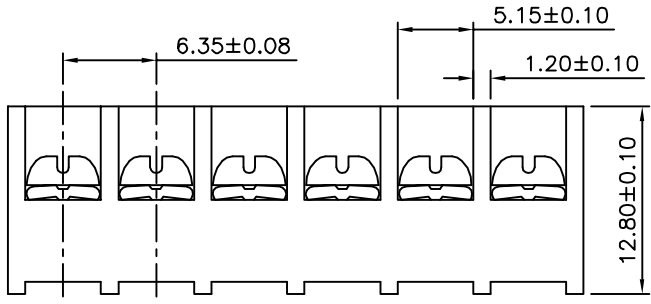

| No. | Name | Material | Remark |
|-----|-----------|--------------|---------------|
| ① | Housing | PA66,UL94V-2 | Black |
| ② | Screw | Steel (M3.0) | Nickel Plated |
| ③ | Terminals | Brass | Tin Plated |

| Pin | A | B | Pin | A | B |
|-----|--------|-------|-----|--------|--------|
| 2 | 14.15 | 6.35 | 18 | 115.75 | 107.95 |
| 3 | 20.5 | 12.7 | 19 | 122.1 | 144.3 |
| 4 | 26.85 | 19.05 | 20 | 128.45 | 120.65 |
| 5 | 33.2 | 25.4 | 21 | 134.8 | 127 |
| 6 | 39.55 | 31.75 | 22 | 141.15 | 133.35 |
| 7 | 45.9 | 38.1 | 23 | 147.5 | 139.7 |
| 8 | 52.25 | 44.45 | 24 | 153.85 | 146.05 |
| 9 | 58.6 | 50.8 | 25 | 160.2 | 152.4 |
| 10 | 64.95 | 57.15 | 26 | 166.55 | 158.75 |
| 11 | 71.3 | 63.5 | 27 | 172.9 | 165.1 |
| 12 | 77.65 | 69.85 | 28 | 179.25 | 171.5 |
| 13 | 83.7 | 76.2 | 29 | 185.6 | 177.8 |
| 14 | 90.35 | 82.55 | 30 | 191.95 | 184.2 |
| 15 | 96.7 | 88.9 | 31 | 198.3 | 190.5 |
| 16 | 103.05 | 95.25 | 32 | 204.7 | 196.9 |
| 17 | 109.4 | 101.6 | | | |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|-------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.5 .XX ±0.5 ANG. |
| 13636 | | EMILY | | |
| | | CHECKED BY | | |
| | | HZF | | UNIT mm |
| | | DRAWING BY | | |
| | | SONG | | |
| SCALE | NONE | REV. | A1 | |

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-----|------------|
| △ A1 | | Modify Data | HZF | 07/03/2012 |
| △ A0 | | NEW RELEASE | | |