

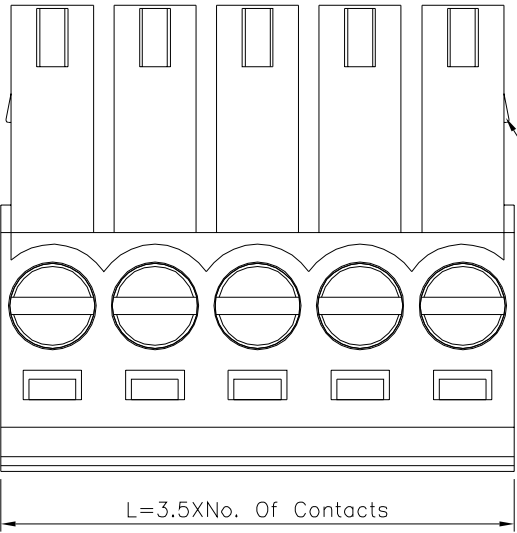


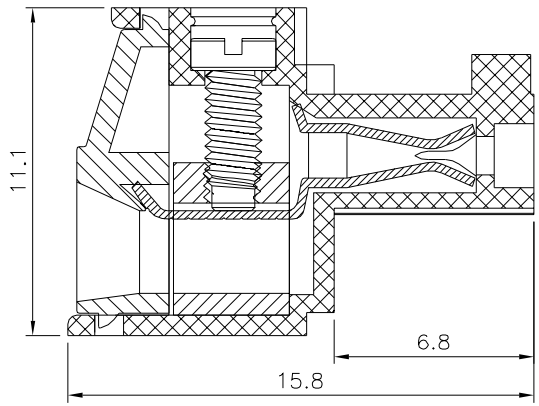

2P To 6P With Wedge,Above
7P Without Wedge(Including 7P)

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

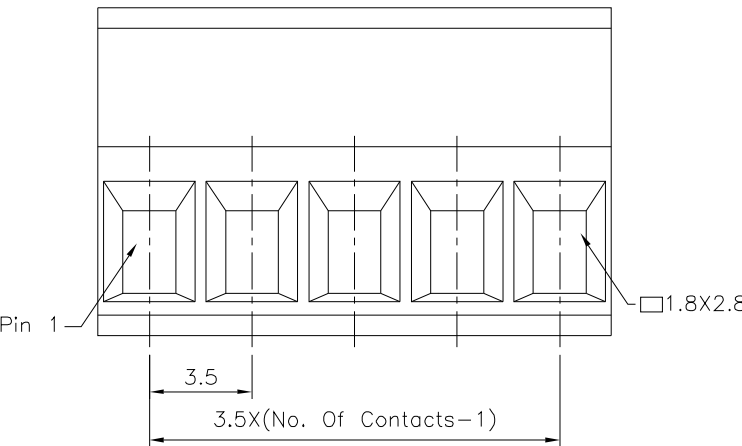

△ SPECIFICATION
Voltage Rating:300V AC
Current Rating:12A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:1600V AC/Minute
Wire Range:16~24 AWG
Torque:2.5 Kgf.cm/M2
Operation Temperature:-40°C~+105°C
Contact:Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Copper Alloy,Tin Plated
Insulator Body:Polyamide(UL94V-0),Green
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 13762		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.40 .XX ±0.30⚠ ANG. ±1°						
		CHECKED BY Leo Han								
		DRAWING BY Michelle Lee				⚠ B1	Modify Data	HZF	03/27/2026	
						⚠ B0	NEW RELEASE	HZF	10/04/2018	
SCALE	NONE	REV.	B1	UNIT mm		NO. REV.	REVISIONS	CHK	DATE	