
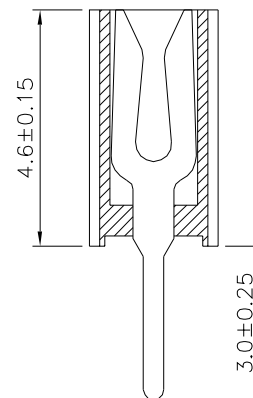
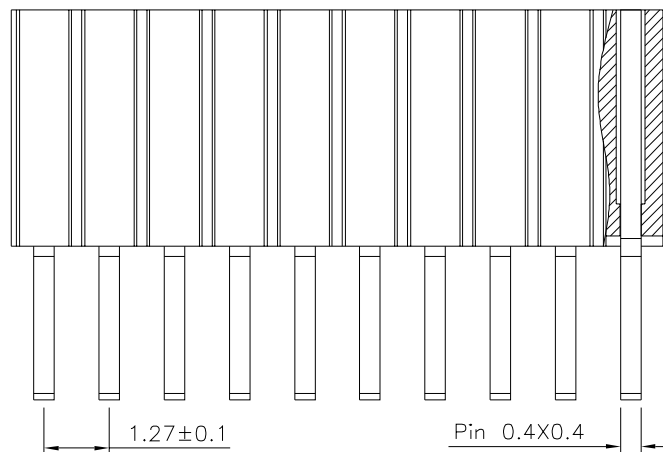


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

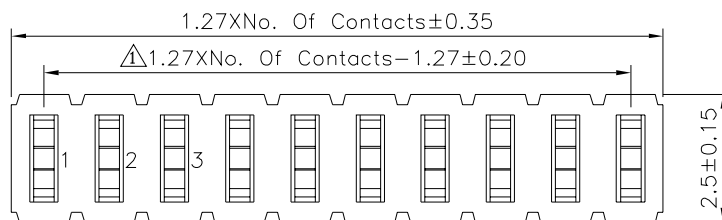

SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13778

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X: ± 0.25	X.: $\pm 2^{\circ}$
.X ± 0.20	.X: $\pm 1.5^{\circ}$
.XX ± 0.15	.XX: $\pm 1^{\circ}$
.XXX ± 0.10	.XXX: $\pm 0.5^{\circ}$

UNIT
mm



⚠	A1	Modify Data	HZF	03/26/2016
⚠	A0	NEW RELEASE	HZF	02/01/2015
NO.REV.	REVISIONS		CHK	DATE