File No.	689	SHEET	1/1

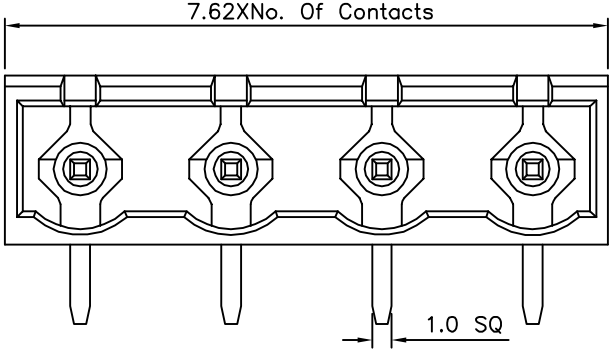

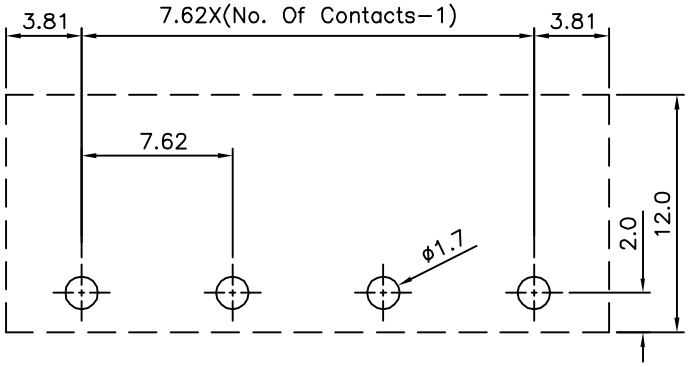

Recommended P.C.B. Layout

⚠1 SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body:Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

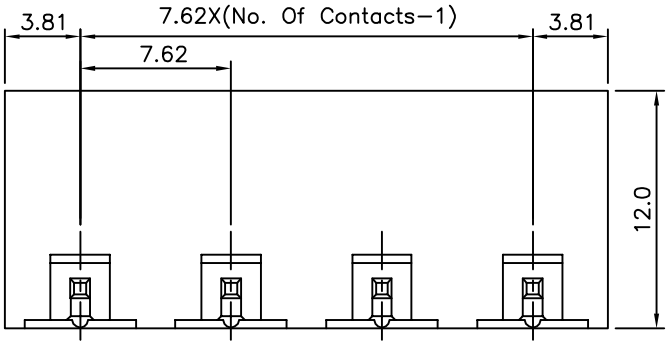

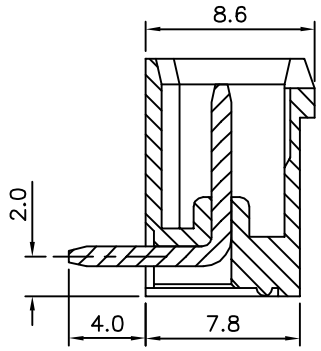

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
13835	EMILY	.X ±0.30
	CHECKED BY HZF	.XX ±0.15
	DRAWING BY GAO	.XXX ±0.05
SCALE NONE	REV. A1	ANG. ±1°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	A1	Modify Spec.	HZF	03/13/2013
⚠0	A0	NEW RELEASE	HZF	03/10/2010