

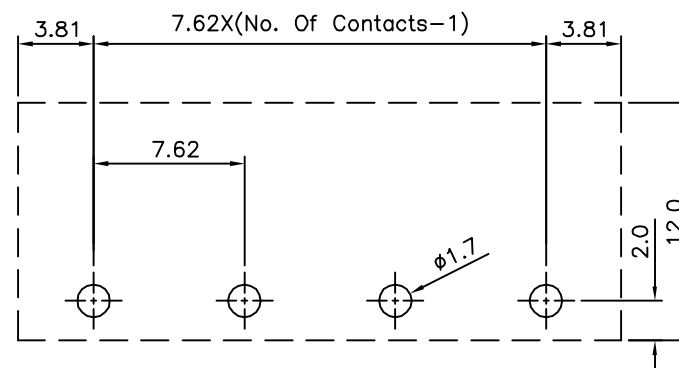
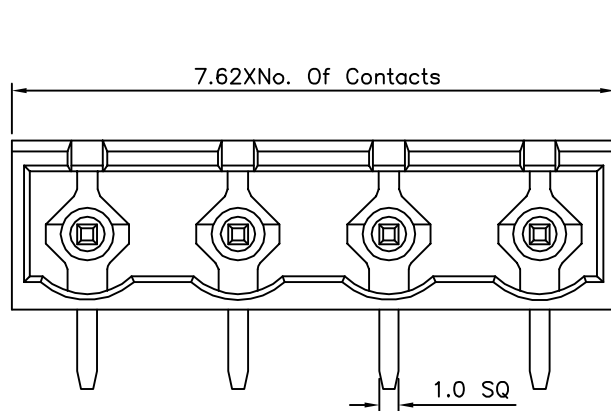


△SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant



Recommended P.C.B. Layout

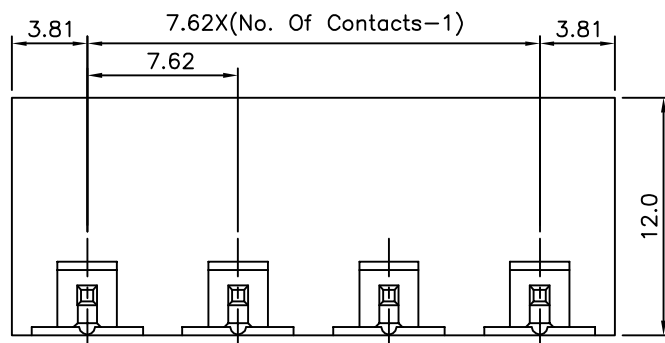

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

13853

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.15
.XXX ±0.05
ANG. ±1°

UNIT
mm



NO.

REV.

REVISIONS

REVISIONS

CHK

DATE

A1 Modify Spec.

A0 NEW RELEASE

CHK

DATE

HZF

HZF

03/13/2013

03/10/2010