

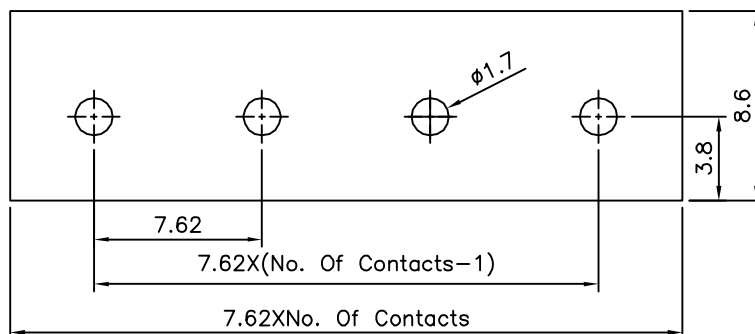
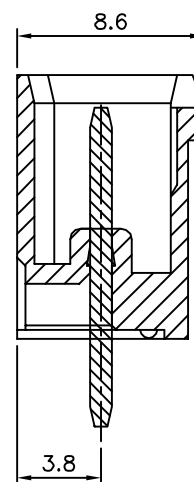


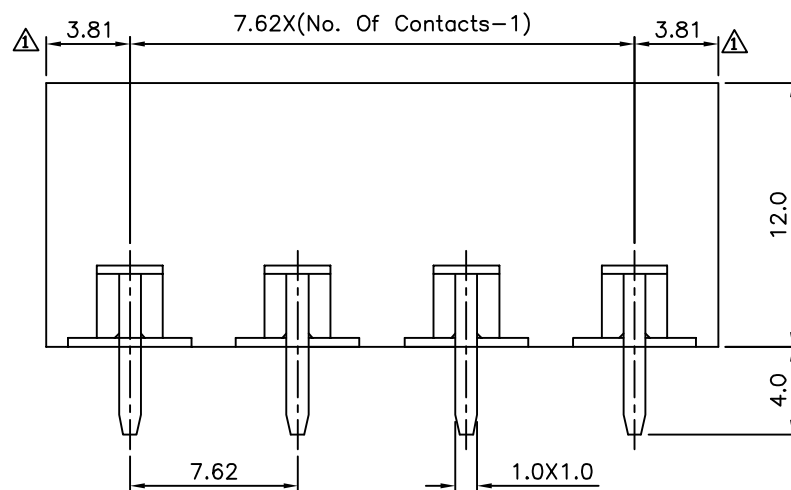

△ Recommended P.C.B. Layout

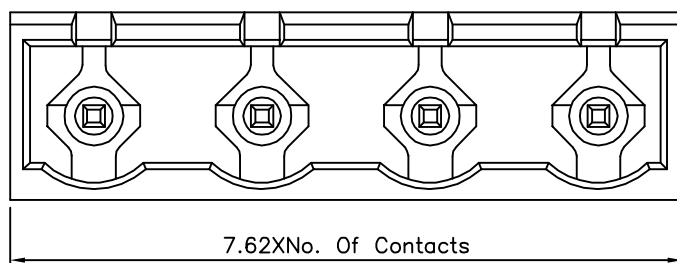

△ SPECIFICATION

Current Rating:16A  
Voltage Rating:300V AC  
Withstand Voltage:2500V AC For 1 Minute  
Using Temperature Range:-40°C~+105°C  
Soldering Temperature:+250°C,5 Seconds Max.  
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green  
Solder Pin:Copper Alloy,Tin Plated  
RoHS Compliant

DRAWING No.

13876

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.30



.X ±0.15

.XX ±0.05

ANG. ±1°

UNIT

mm



SCALE

NONE

REV.

A1

NO. REV.

REVISIONS

CHK

DATE

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

△ A1

Modify Data

HZF

08/30/2013

△ A0

NEW RELEASE

HZF

10/04/2010