

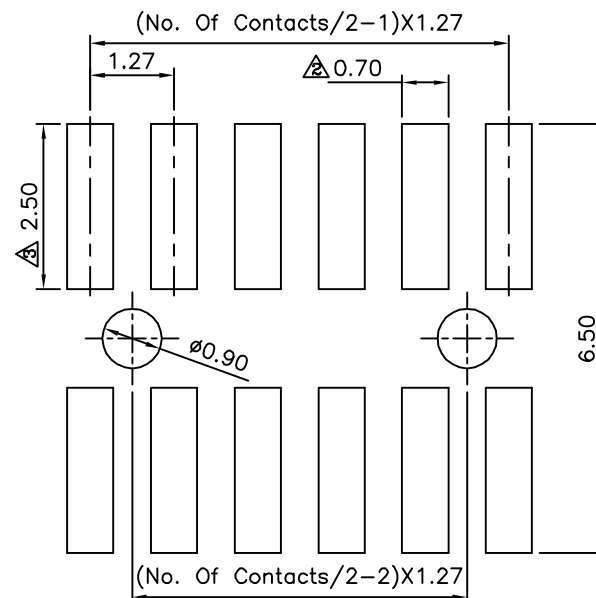
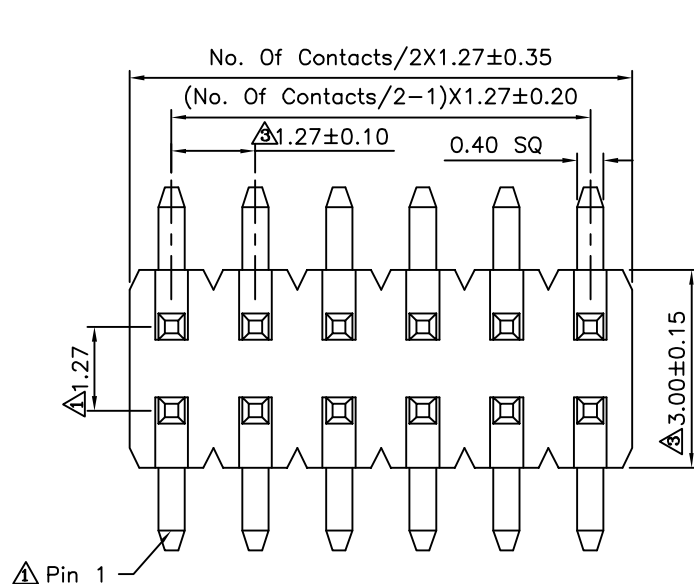


△ SPECIFICATION

- △ Current:1A
- Withstanding Voltage:1000V AC Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:5000 Megaohms Min.
- Operation Temperature:−55°C~+105°C
- Housing:PA6T(UL94V−0),Black
- Contact:Brass,Gold Flash Over Nickel
- △ No. Of Contacts:06~100 Contacts
- RoHS Compliant

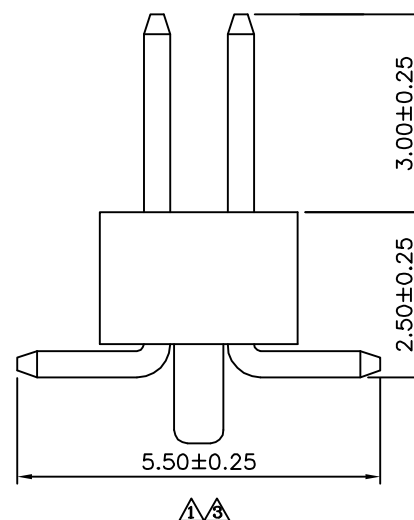

△ Recommended P.C.B. Layout

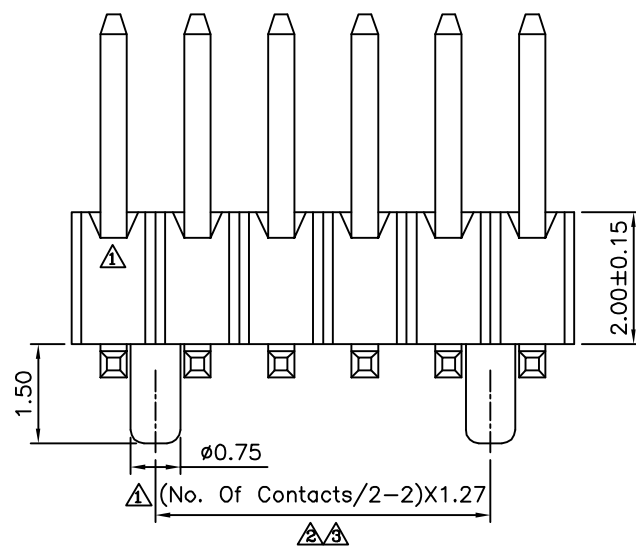

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14045

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


YBL

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.38
.XX ± 0.25
ANG. $\pm 5^\circ$

UNIT
mm



3	A3	Modify Data	HZF	11/29/2013
2	A2	Modify Data	HZF	01/03/2011
1	A1	Modify Data	HZF	07/02/2009
0	A0	NEW RELEASE	SHIN	08/14/2006
NO.REV.		REVISIONS	CHK	DATE