

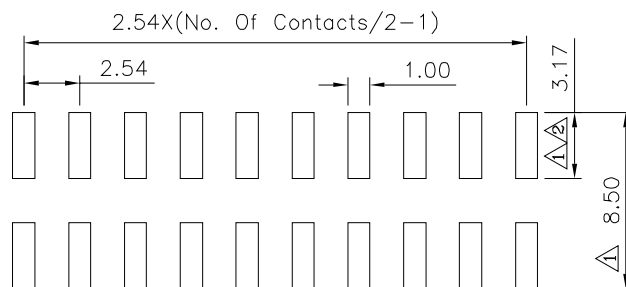



△△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

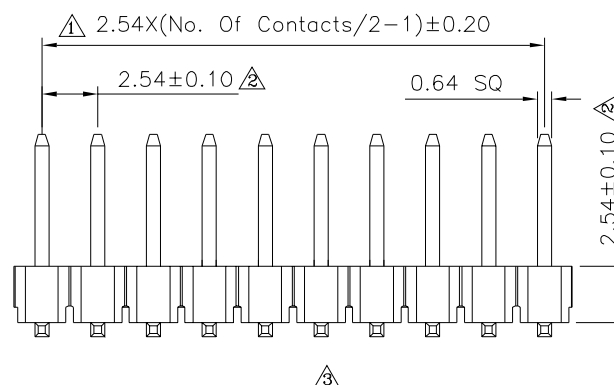

Recommended P.C.B Layout

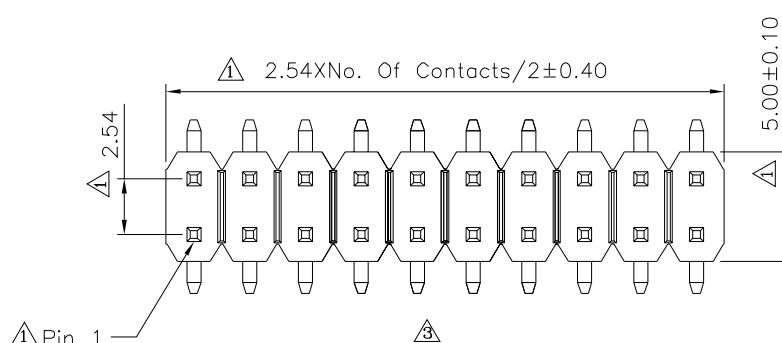

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

14123

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △.X ±0.38
 △.XX ±0.25
 △.XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	12/22/2022
△2	A2	Modify Data	HZF	08/31/2011
△1	A1	Modify Data	HZF	11/25/2009
△0	A0	NEW RELEASE	SHIN	03/13/2006