

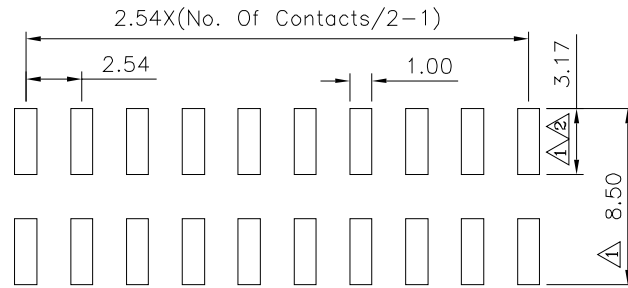



△△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

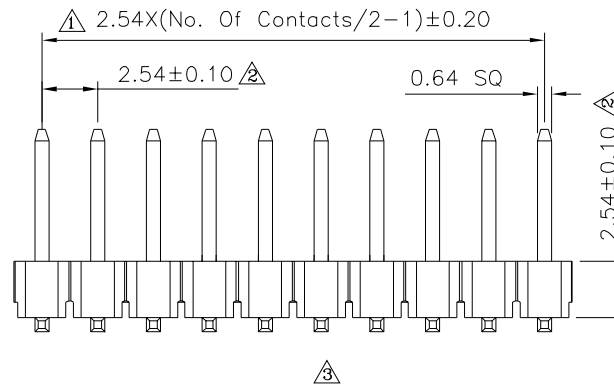

Recommended P.C.B Layout

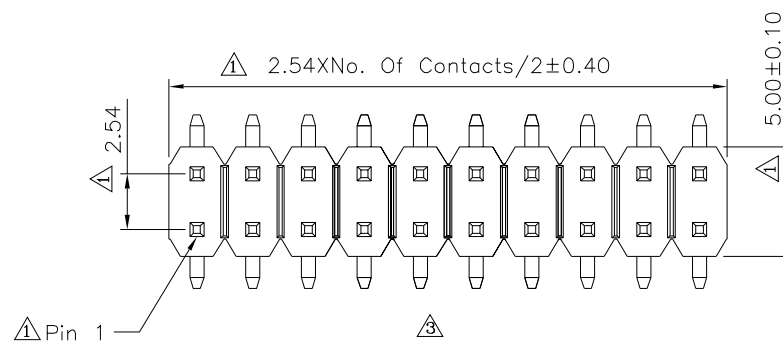

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 14127		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠ .X ±0.38 ⚠ .XX ±0.25 ⚠ .XXX ±0.05						
		MEI				⚠ A3	Modify Data		HZF	12/22/2022
		CHECKED BY				⚠ A2	Modify Data		HZF	08/31/2011
		HZF				⚠ A1	Modify Data		HZF	11/25/2009
		DRAWING BY		WSS		⚠ A0	NEW RELEASE		SHIN	03/13/2006
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS		CHK	DATE