





△△ SPECIFICATION
 Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

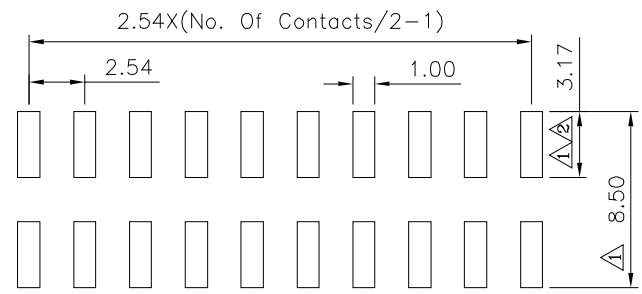

Recommended P.C.B Layout

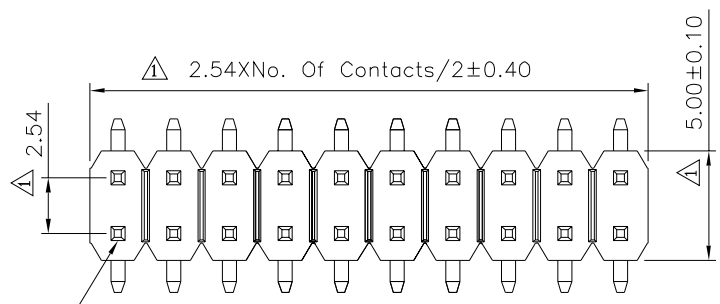

△ Pin 1

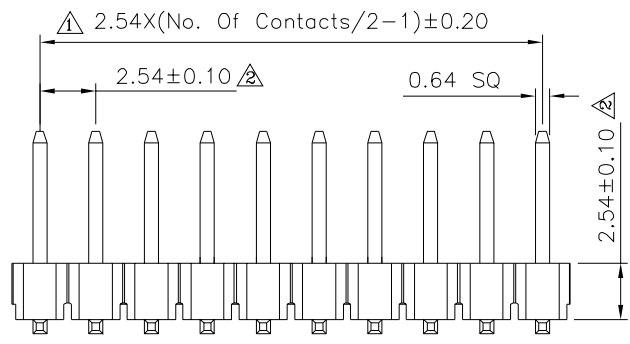

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 .XX ±0.25 .XXX ±0.05
14140		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	WSS	
		REV.	A3	UNIT mm

△ A3	Modify Data	HZF	12/22/2022
△ A2	Modify Data	HZF	08/31/2011
△ A1	Modify Data	HZF	11/25/2009
△ A0	NEW RELEASE	SHIN	03/13/2006
NO.REV.	REVISIONS	CHK	DATE