

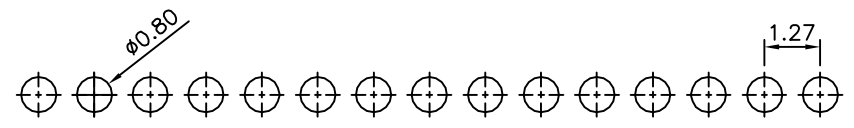
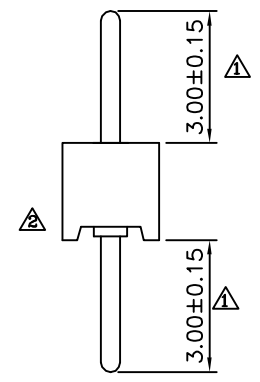


SPECIFICATION

- ⚠ Current Rating:1 Amps/Contact Max.
- ⚠ Contact Resistance:4 Milliohms/Contact Max.
- ⚠ Insulation Resistance:1000 Megaohms Min. At 500V
- ⚠ Operation Voltage:60V AC/DC
- ⚠ Withstanding Voltage:1000V AC Minute
- ⚠ Operation Temperature:-55°C~+125°C
- ⚠ Soldering Temperature:+260°C,10s Max.
- ⚠ Pin:Brass,Gold Flash Over All,Over Nickel
- ⚠ Insulator:PA46,Black
- ⚠ RoHS Compliant

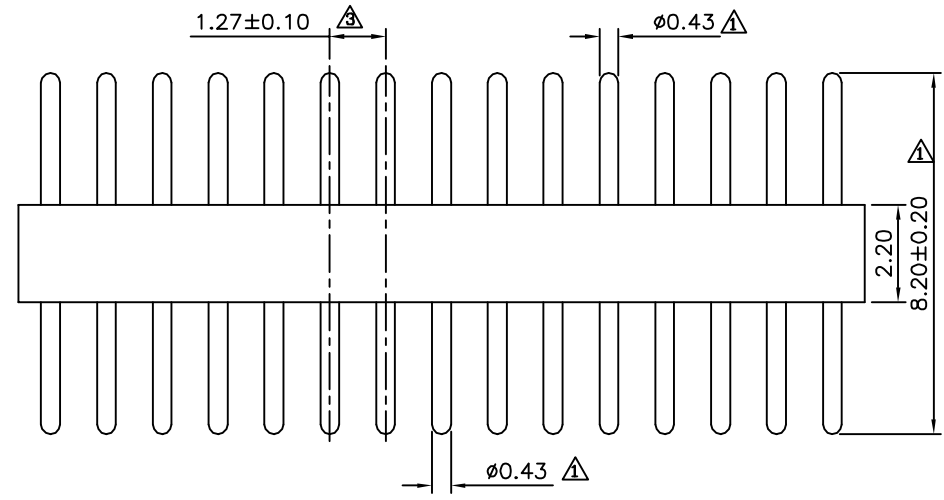

Recommended P.C.B. Layout

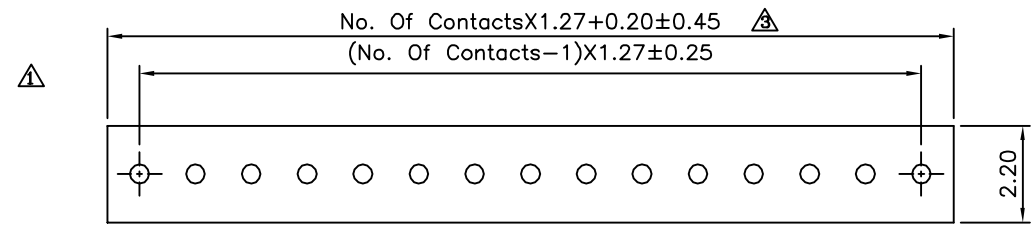

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 .XXX ±0.10 ANG. ±5°	UNIT mm	
14202		EMILY				
SCALE		CHECKED BY				
NONE		HZF		REV.	A4	
REV.		DRAWING BY				
		SAN				

NO.	REV.	REVISIONS	CHK	DATE
⚠ A4		Modify Data	HZF	03/29/2014
⚠ A3		Modify Data	HZF	03/30/2011
⚠ A2		Modify Data	HZF	12/17/2009
⚠ A1		Modify Data	HZF	11/22/2008
⚠ A0		NEW RELEASE	HZF	11/15/2007