



△△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16 Amps/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1 Minute)
Test Time=60s/PCS


Wire Range:12~30 AWG
△3 Torque:4.5 Kgf.cm/M3.0
Operation Temperature:-40°C~+105°C
Soldering Reliability:250°C±10°C/5s Max.
Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

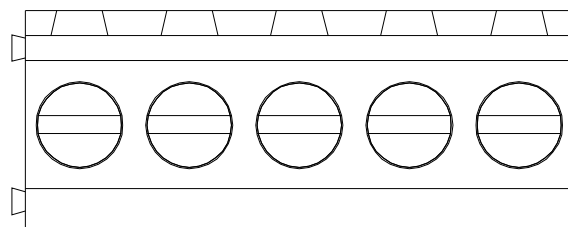


△2

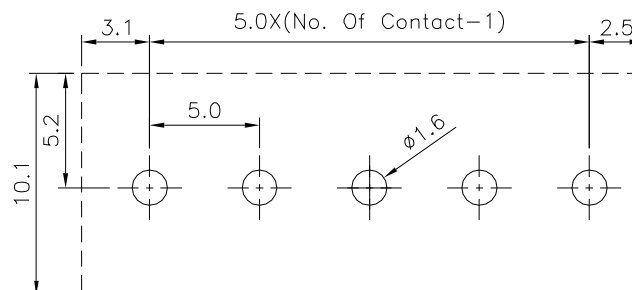

Recommended P.C.B. Layout

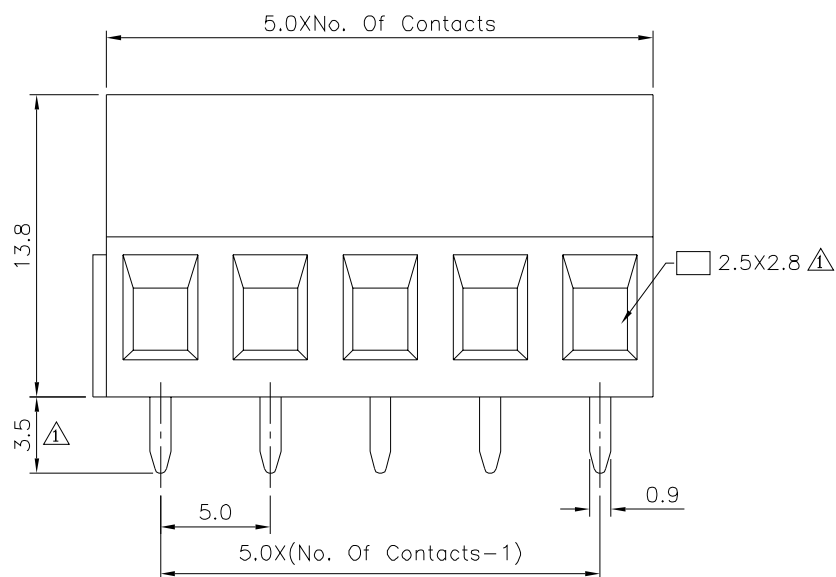

△3/2

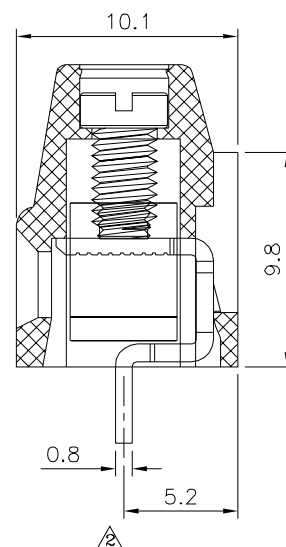

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

14330

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X.* ±1°

SCALE

NONE

REV.

A3

UNIT

mm

UNIT

mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	11/04/2017
△2	A2	Modify Data	HZF	08/15/2013
△1	A1	Modify Data	HZF	11/27/2010
△0	A0	NEW RELEASE	HZF	11/19/2009