
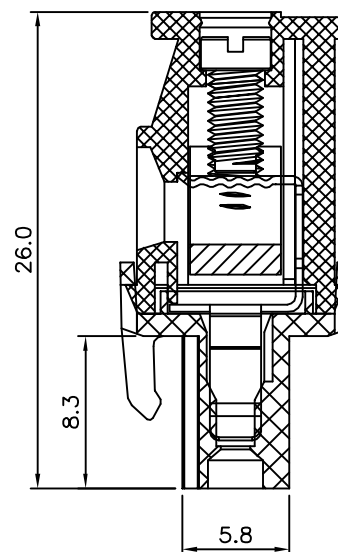
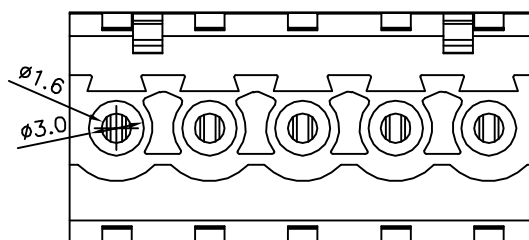
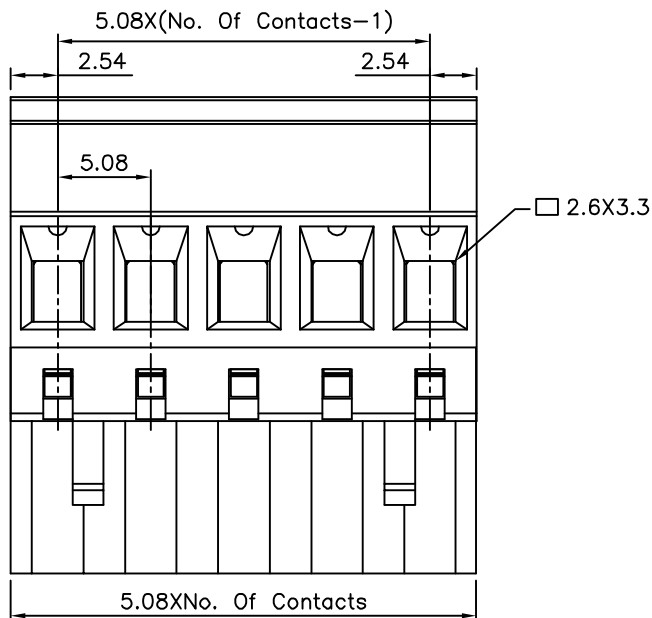


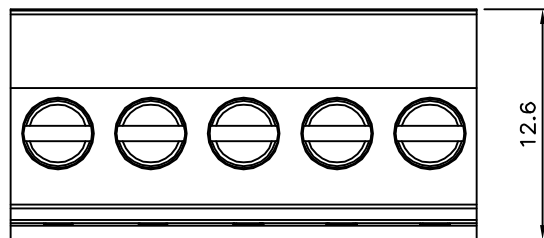

SPECIFICATION

Current Rating:16 Amp/Way Max.

Voltage Rating: 300V AC

Contact Resistance: 20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60 Sec./1 PCS

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Soldering Reliability: Test Temperature = $250^{\circ}\text{C} \pm 10^{\circ}\text{C}$ /
5 Seconds Max.

Wire Range:12~26 AWG

Torque: 5.0 kgf.cm/M3

Insulator Body(Housing):Polyamide(UL94V-0),Green

①Contact(Metal Housing):Copper Alloy,Nickel Plated

1 Wire Guard: Copper Alloy, Tin Plated

Terminal Screw: Steel, Galvanized With Cr3+ Plated

RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

14400

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV.	
------	--

A1

Y	UNLESS OTHERWISE SPECIFIED
---	-------------------------------

TOLERANCES ARE

X.	± 0.50
.X	± 0.30
.XX	± 0.20
X°	$\pm 1^{\circ}$

UNIT	100
------	-----



	A1
---	-----------

1	Modify Data
---	-------------

	△	△
--	---	---

NEW RELEASE

NO	REV
----	-----

REVISIONS

CHK

DATE