



SPECIFICATION

- Rating:DC 30V 5.0A
- Withstanding Voltage:500V AC
- Contact Resistance:30 Milliohms Max.
- Insulation Resistance:100 Megaohms Min. (DC 250V)
- Insertion And Extraction Force:3~20N
- Life Test:5000 Cycles
- RoHS Compliant

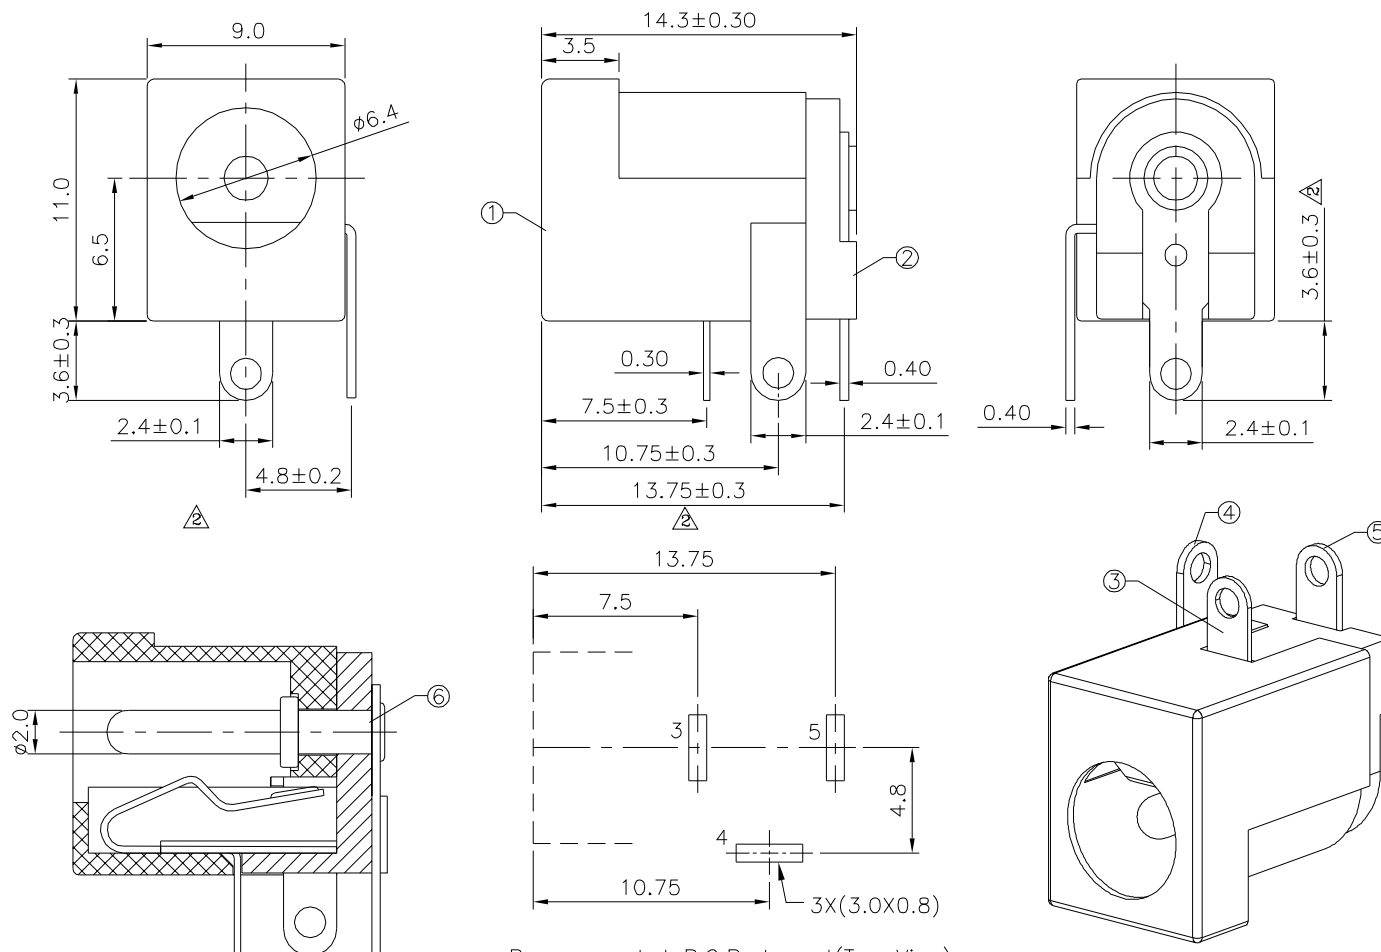

Schematic



No.	Description	Q'ty	Material	Remark
①	Housing	1	LCP	Black
②	Cover	1	LCP	Black
③	Spring Piece	1	Bronze	Tin Plated
④	Curve Piece	1	Brass	Tin Plated
⑤	Flat Foot	1	Brass	Tin Plated
⑥	Pin	1	Brass	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 14878

14878

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

REV. A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.15
.XX ± 0.15
ANG. $\pm 1.5^\circ$

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
②	A2	Modify Data	HZF	10/23/2019
①	A1	Modify Data	HZF	10/30/2018
①	A0	NEW RELEASE	HZF	04/11/2013