



File No.	182PB18237	SHEET	1/1

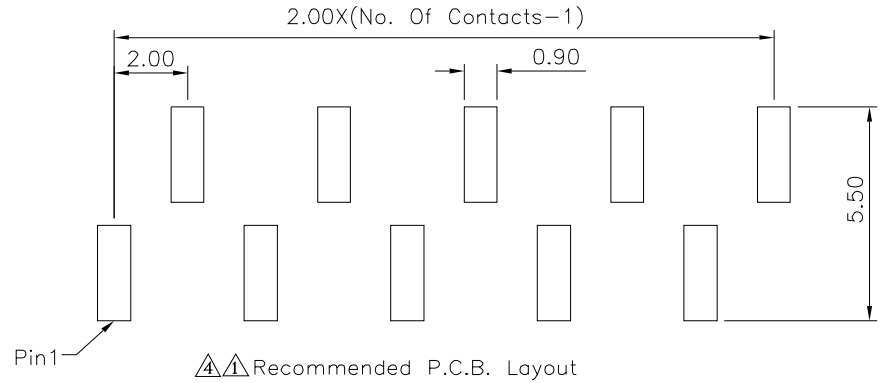

△4△1 Recommended P.C.B. Layout

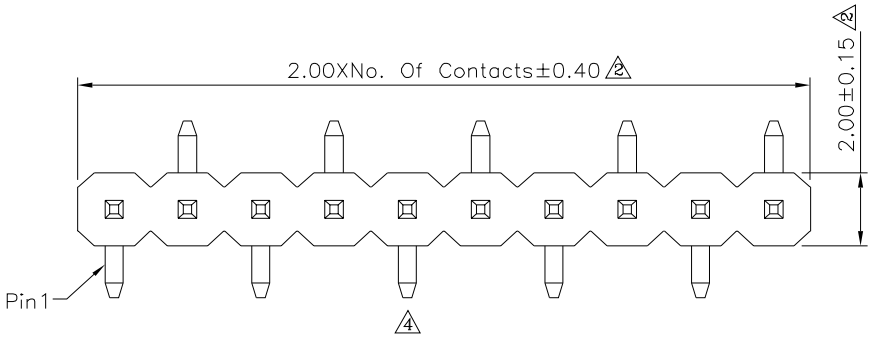

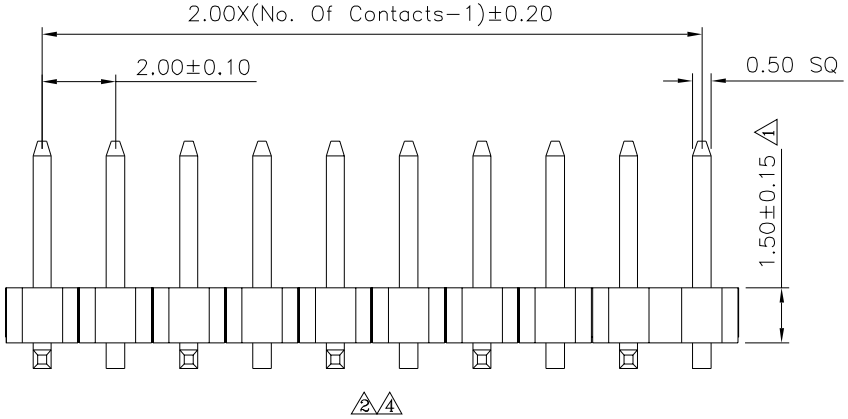



△4△2△1 SPECIFICATION

Current:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Housing:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	14992		
APPROVED BY	EMILY		
CHECKED BY	HZF		
DRAWING BY	YBL		
SCALE	NONE	REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38 △4
.XX ±0.25
.XXX ±0.05
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△4	A4	Modify Data	HZF	02/18/2025
△3	A3	Modify Data	HZF	01/14/2014
△2	A2	Modify Data	HZF	12/18/2012
△1	A1	Modify Data	HZF	09/03/2009
△0	A0	NEW RELEASE	SHIN	04/15/2007