


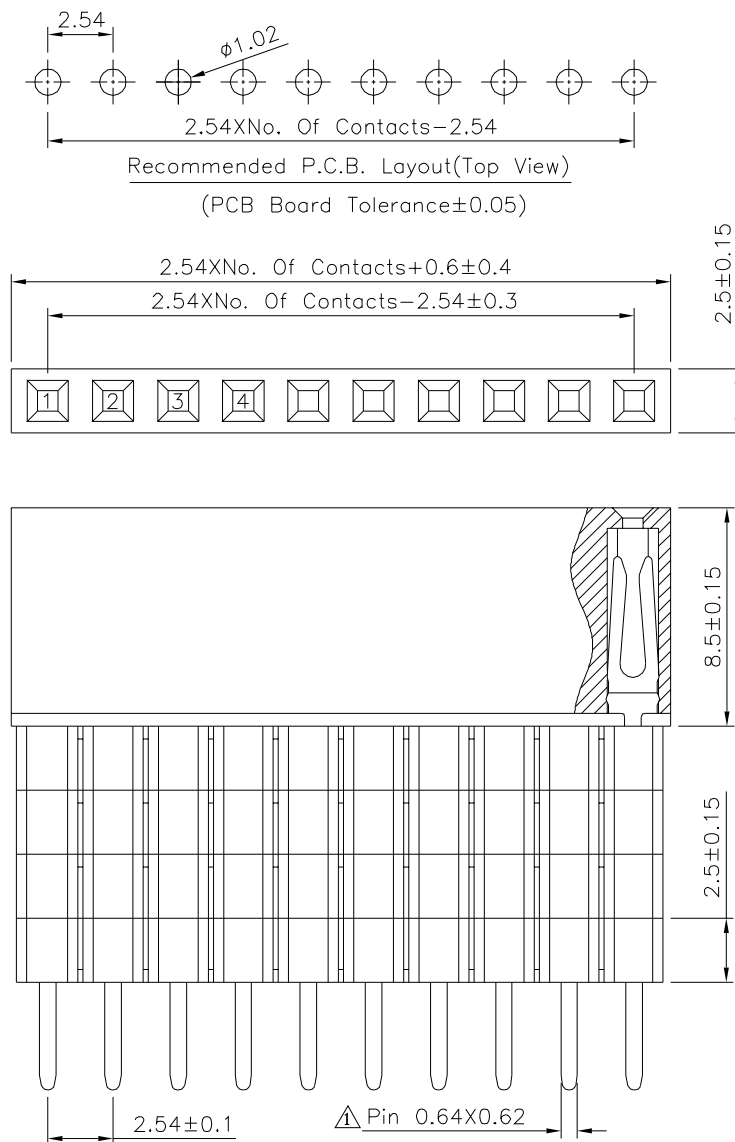

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
⚠ Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

15297

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE $\triangle 1$

X.	± 0.30	X.*	$\pm 2^\circ$
.X	± 0.25	.X*	$\pm 1.5^\circ$
.XX	± 0.20	.XX*	$\pm 1^\circ$
.XXX	± 0.15	.XXX*	$\pm 0.5^\circ$

	UNIT mm
--	------------



1	A1
---	----

Modify Data

	$\triangle$	
	0	AO

NEW RELEASE

NO.	REV.
-----	------

7.	REVISIONS
----	-----------

1121
CHK

DATE