
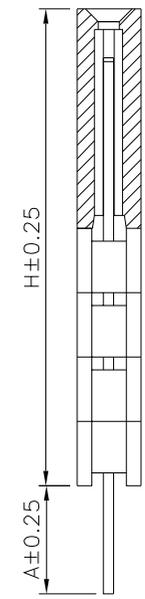
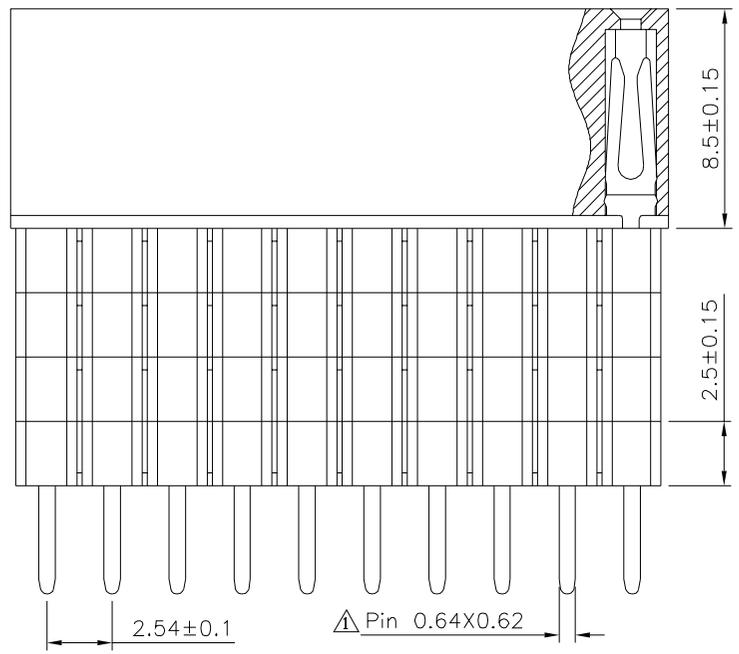


Recommended P.C.B. Layout (Top View)
(PCB Board Tolerance ±0.05)

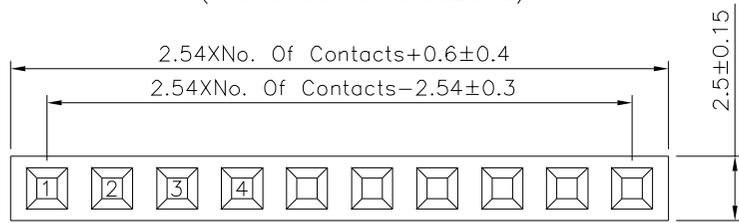

SPECIFICATION

Current Rating: 3A
 Withstand Voltage: 1000V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C ~ +105°C
 ⚠ Insulator: PA9T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

Series No.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠
15300		EMILY		
		CHECKED BY		
		HZF		
DRAWING BY		HAO		X: ±0.30 X: ±2° .X ±0.25 .X: ±1.5° .XX ±0.20 .XX: ±1° .XXX ±0.15 .XXX: ±0.5°
SCALE	NONE	REV.	A1	
UNIT	mm			NO. REV.

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	03/28/2025
⚠	A0	NEW RELEASE	HZF	12/11/2014