
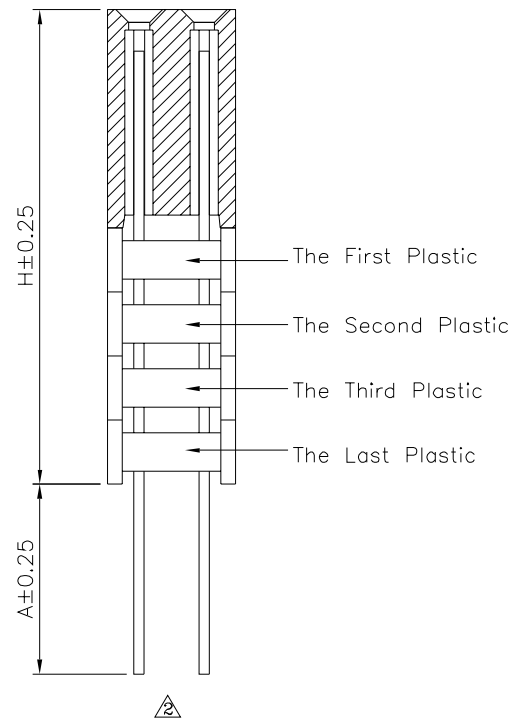
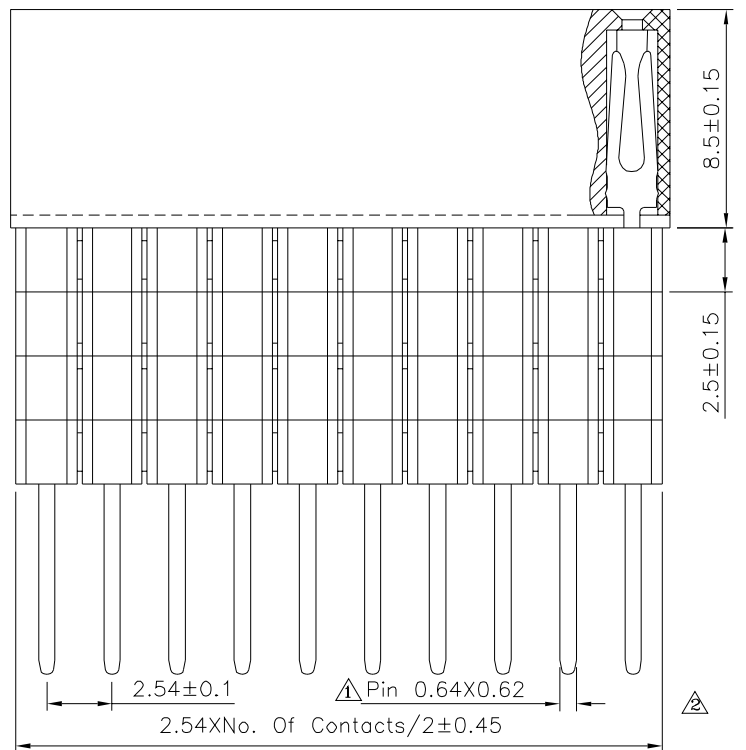


Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

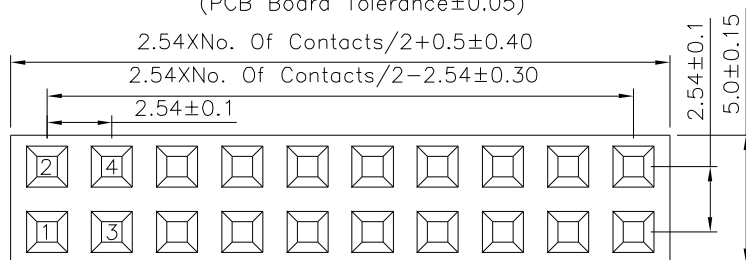

SPECIFICATION

Current Rating:3A

Withstand Voltage:1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operating Temperature:-40°C~+105°C

Insulator:PA9T(UL94V-O),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15382

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.30 X $\pm 2^\circ$
.XX ± 0.25 .X $\pm 1.5^\circ$
.XXX ± 0.20 .XX $\pm 1.0^\circ$
.XXX ± 0.15 .XXX $\pm 0.5^\circ$

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	01/26/2024
A1		Modify Data	HZF	12/20/2023
A0		NEW RELEASE	HZF	05/03/2014