
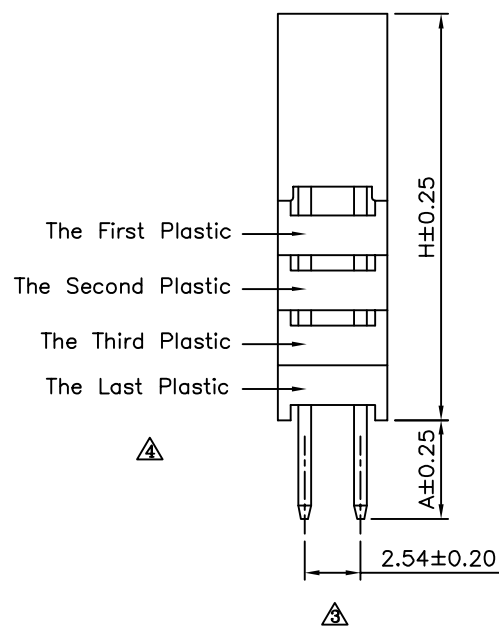
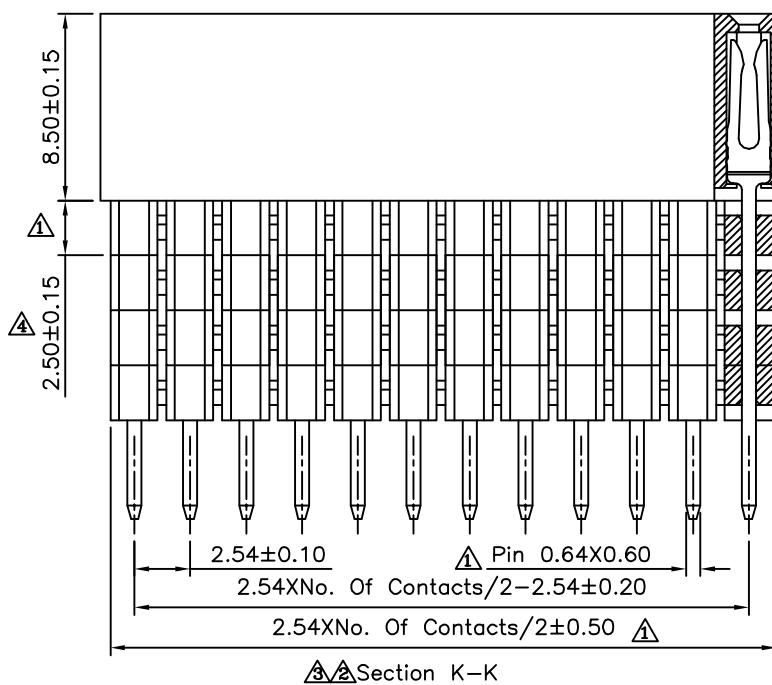


Recommended P.C.B. Layout(Top Side)  
(PCB Board Tolerance $\pm 0.05$ )

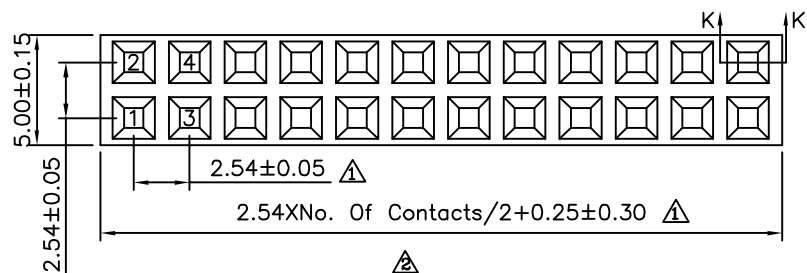

### △ SPECIFICATION

- Current Rating:3.0 Amp  
△ Withstand Voltage:1000V AC/DC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Brass,Gold Plated Over Nickel  
Insulator:PBT+30%G.F.(UL94V-0),Black  
RoHS Compliant

| △△ Series No. | Plastic Q'ty | H     | A△   |
|---------------|--------------|-------|------|
| 0196          | 1            | 11.05 | 2.30 |
| 0196          | 1            | 11.05 | 7.35 |
| 0196          | 1            | 11.05 | 12.2 |
| 0197          | 2            | 13.59 | 4.85 |
| 0197          | 2            | 13.59 | 9.65 |
| 0198          | 3            | 16.13 | 2.30 |
| 0198          | 3            | 16.13 | 7.10 |
| 0199          | 4            | 18.67 | 4.60 |

DRAWING No.

15383

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X  $\pm 0.40$   
.XX  $\pm 0.25$   
.XXX  $\pm 0.15$   
ANG.  $\pm 3^\circ$

UNIT  
mm

△ A4  
△ A3  
△ A2  
△ A1  
△ A0  
NO. REV.

Modify Data  
Modify Data  
Modify Data  
UPDATE DIMENSION  
NEW RELEASE  
REVISIONS

HZF  
HZF  
HZF  
HZF  
SHIN  
CHK

10/23/2012  
06/07/2012  
02/17/2011  
04/15/2008  
09/02/2007  
DATE

4U CON 元化興業股份有限公司  
4U CON TECHNOLOGY INC.