
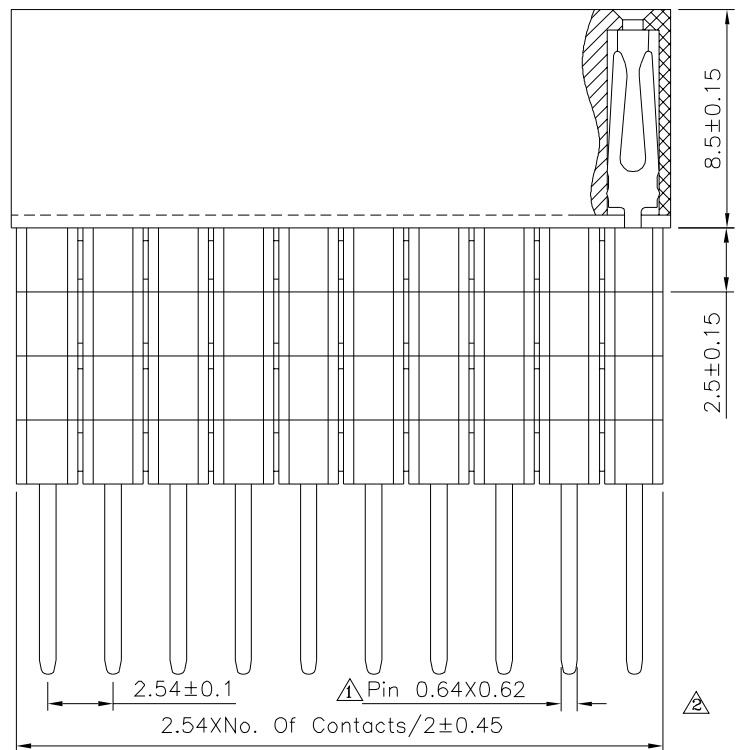


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

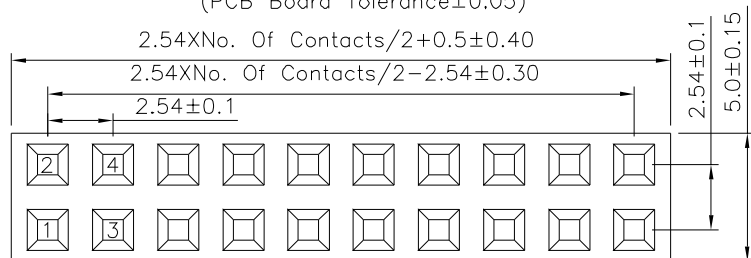


File No. 6970A26806 SHEET 1/1

SPECIFICATION

Current Rating:3A

- Withstand Voltage:1000V AC Min./Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operating Temperature:-40°C~+105°C

- Insulator:PA9T(UL94V-0),Black
- Contact:Brass,Gold Flash Over Nickel
- RoHS Compliant

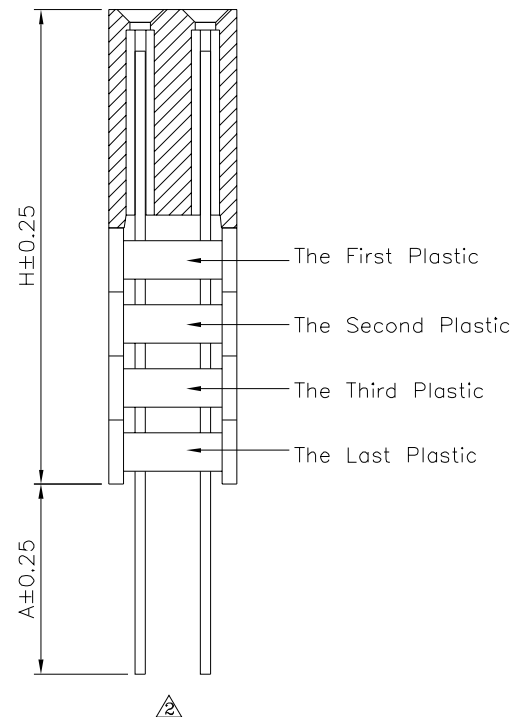

Series no.	Plastic Q'ty	H	A
0196	1	11.00	2.30
0196	1	11.00	7.00
0196	1	11.00	12.30
0197	2	13.50	4.50
0197	2	13.50	9.80
0198	3	16.00	2.00
0198	3	16.00	7.30
0199	4	18.50	4.80

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

15420

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30 X. ±2°
.X ±0.25 .X. ±1.5°
.XX ±0.20 .XX. ±1.0°
.XXX ±0.15 .XXX. ±0.5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
②	A2	Modify Data	HZF	01/26/2024
①	A1	Modify Data	HZF	12/20/2023
①	A0	NEW RELEASE	HZF	05/03/2014