

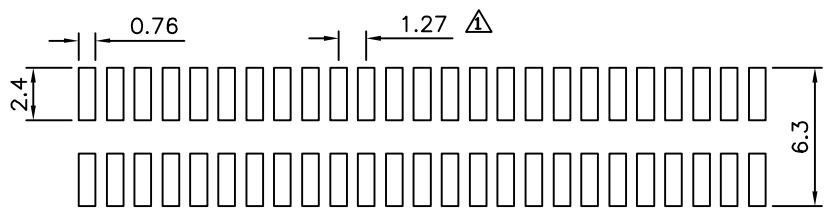

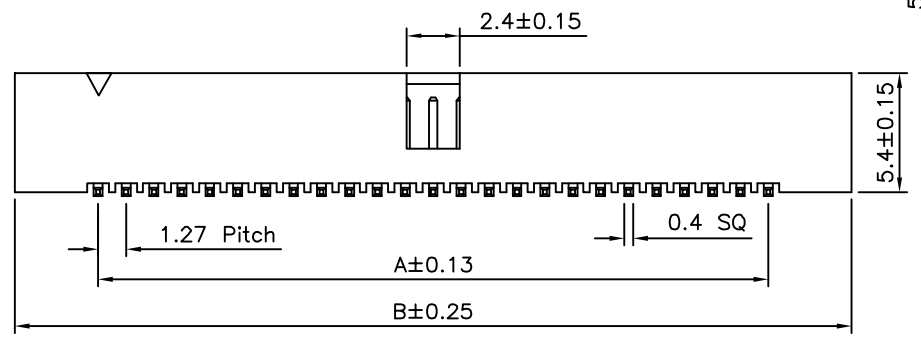


SPECIFICATION

△ Insulator: LCP, Black
 Contact: Brass, Gold Plated Over Nickel
 RoHS Compliant

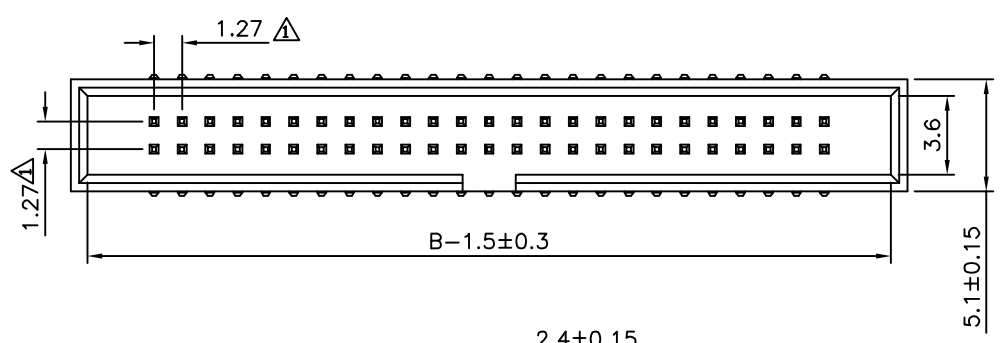

P.C.Board Layout

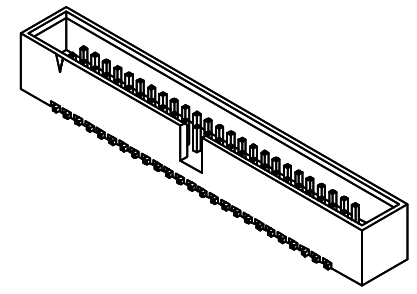

| △ Circuits | A | B |
|------------|-------|-------|
| 6 | 2.54 | 10.11 |
| 8 | 3.81 | 11.38 |
| 10 | 5.08 | 12.65 |
| 12 | 6.35 | 13.92 |
| 14 | 7.62 | 15.19 |
| 16 | 8.89 | 16.46 |
| 20 | 11.43 | 19.00 |
| 24 | 13.97 | 21.54 |
| 26 | 15.24 | 22.81 |
| 30 | 17.78 | 25.35 |
| 34 | 20.32 | 27.89 |
| 40 | 24.13 | 31.70 |
| 44 | 26.67 | 34.24 |
| 50 | 30.48 | 38.05 |
| 60 | 36.83 | 44.40 |
| 64 | 39.37 | 46.94 |
| 68 | 41.91 | 49.48 |
| 80 | 49.53 | 57.10 |
| 100 | 62.23 | 68.90 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | | | | | | |
|-------------|------|-------------|----|--|-------------|-------------|------------|------------|------|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. | △ A4 | Modify Data | HZF | 03/13/2014 | |
| 15488 | | EMILY | | | △ A3 | Modify Data | HZF | 10/05/2011 | |
| | | CHECKED BY | | | △ A2 | Add 8 Pin | HZF | 05/18/2011 | |
| | | HZF | | △ A1 | Modify Data | HZF | 11/26/2009 | | |
| | | DRAWING BY | | △ A0 | NEW RELEASE | BECKY | 11/18/2004 | | |
| SCALE | NONE | REV. | A4 | UNIT | mm | NO.REV. | REVISIONS | CHK | DATE |