
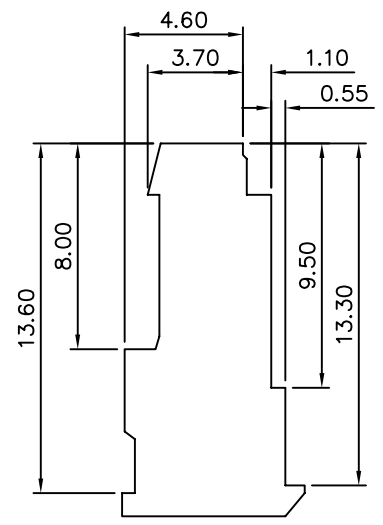
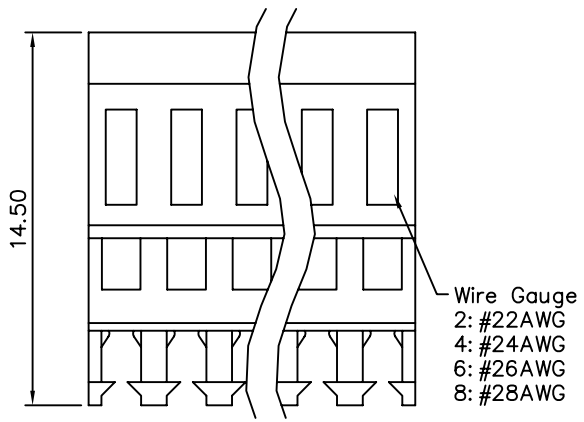


SPECIFICATIONS

Material: Nylon UL 94V-2, Nature
 Contact Plating: Tin Plated
 Current Rating: 3A AC, DC
 Voltage Rating: 250V AC Max.
 Temperature Range: -40°C~+105°C
 Contact Resistance: Initial Value/10 Milliohms Max.
 After Environmental Testing/20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 1500V AC/Minute
 Applicable Wire: AWG#22~#28
 Circuits: 2~28
 Mates With 0.64mm Pins
 Terminal Retention To Housing 6.6lbs(3.0Kg) Min.

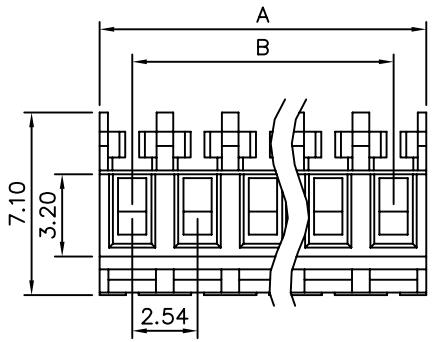

Circuits	A±0.20	B±0.20	Circuits	A±0.20	B±0.20
02	5.08	2.54	16	40.64	38.10
03	7.62	5.08	17	43.18	40.64
04	10.16	7.62	18	45.72	43.18
05	12.70	10.16	19	48.26	45.72
06	15.24	12.70	20	50.80	48.26
07	17.78	15.24	21	53.34	50.80
08	20.32	17.78	22	55.88	53.34
09	22.86	20.32	23	58.42	55.88
10	25.40	22.86	24	60.96	58.42
11	27.94	25.40	25	63.50	60.96
12	30.48	27.94	26	66.04	63.50
13	33.02	30.48	27	68.58	66.04
14	35.56	33.02	28	71.12	68.58
15	38.10	35.56			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
15748		MEI		
		CHECKED BY BECKY		
		DRAWING BY HZF		UNIT mm
SCALE	NONE	REV.	A0	

△ A0	NEW RELEASE	BECKY	12/09/2004
NO.REV.	REVISIONS	CHK	DATE