




PCB Layout





**SPECIFICATIONS**

Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megohms Min.  
 Withstanding Voltage:1000V AC/Minute  
 Temperature Range:-25°C To +125°C  
 Insulator:High Temp. Plastic UL 94V-0  
 Contact:Copper Alloy  
 Finish:Gold Plated

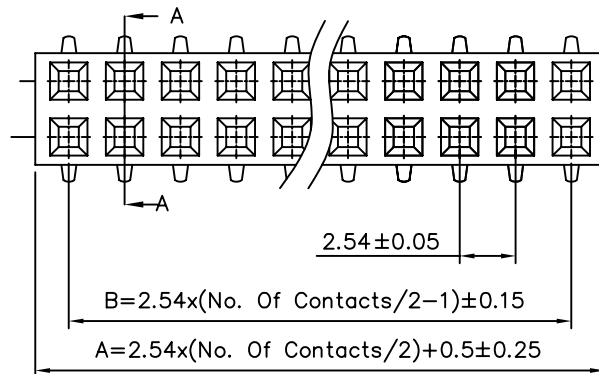

Section A-A

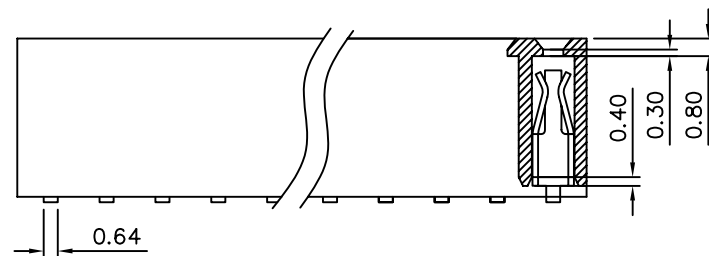

Pos.	Dim. A	Dim. B	Pos.	Dim. A	Dim. B
04	5.58	2.54	44	56.38	53.34
06	8.12	5.08	46	58.92	55.88
08	10.66	7.62	48	61.46	58.42
10	13.2	10.16	50	64	60.96
12	15.74	12.7	52	66.54	63.5
14	18.28	15.24	54	69.08	66.04
16	20.82	17.78	56	71.62	68.58
18	23.36	20.32	58	74.16	71.12
20	25.9	22.86	60	76.7	73.66
22	28.44	25.4	62	79.24	76.2
24	30.98	27.94	64	81.78	78.74
26	33.52	30.48	66	84.32	81.28
28	36.06	33.02	68	86.86	83.82
30	38.6	35.56	70	89.4	86.36
32	41.14	38.1	72	91.94	88.9
34	43.68	40.64	74	94.48	91.44
36	46.22	43.18	76	97.02	93.98
38	48.76	45.72	78	99.56	96.52
40	51.3	48.26	80	102.1	99.06
42	53.84	50.8			

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 15790

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.2  
 .XX ±0.15  
 ANG.

SCALE NONE

REV. A0

UNIT mm

NO. REV. A0 NEW RELEASE BECKY 02/18/2005  
 REVISIONS CHK DATE