
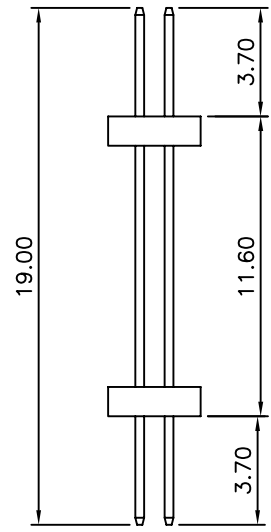
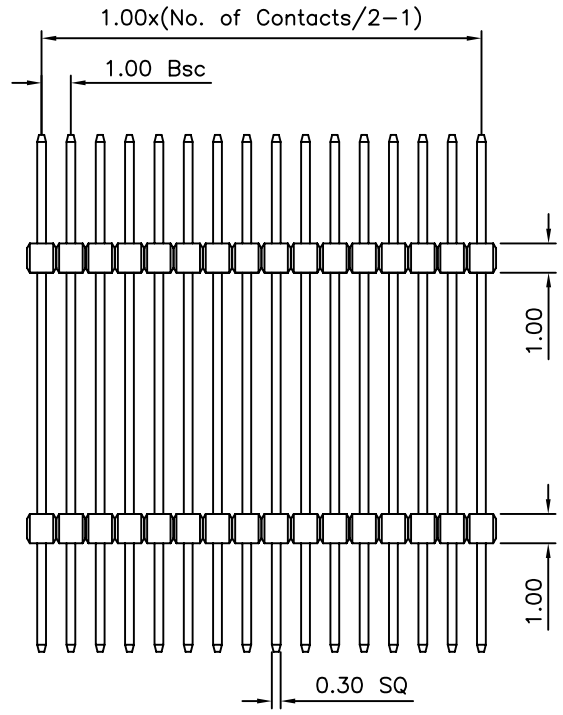
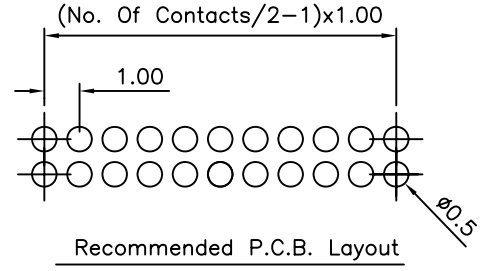


SPECIFICATION

Current:3A
 Operating Temperature:-55°C To +105°C
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Withstanding Voltage:1000V AC RMS
 Housing:Nylon6T, UL94V-0
 Color:Natural(Black)
 Contact:Copper Alloys,Gold Flash

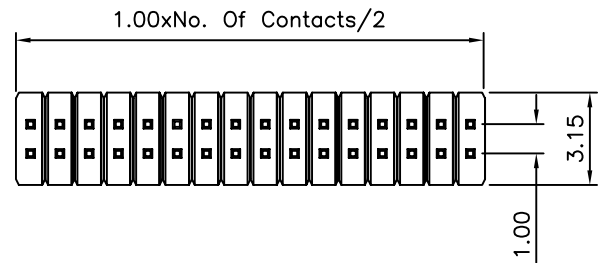

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 15928

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY PEGA

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG ±5°

SCALE NONE

REV. A0

UNIT mm

| | | | | |
|------|------|-------------|-----|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A0 | | NEW RELEASE | HZF | 12/22/2006 |