File No.	432	SHEET	1 /1

⚠1 SPECIFICATION

Current Rating: 2.0Amp
Insulator Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Withstand Voltage: 500V AC/DC
Operating Temperature: −40°C~+105°C
Contact: Phosphor Bronze,Au Plated Over Ni
Insulator: PA6T+30%G.F,UL 94V−0
RoHS Compliant

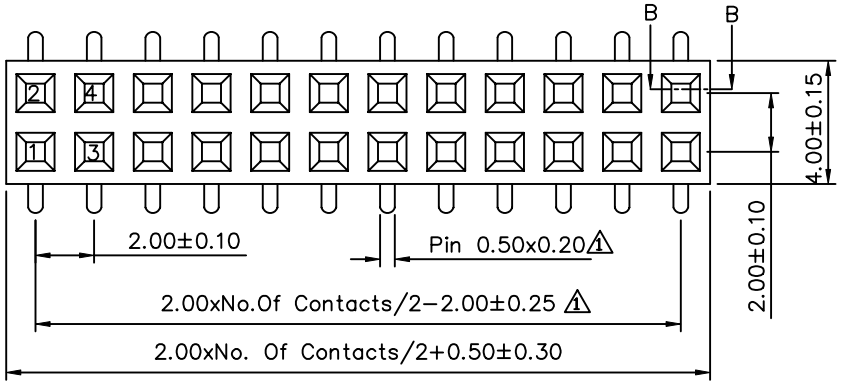

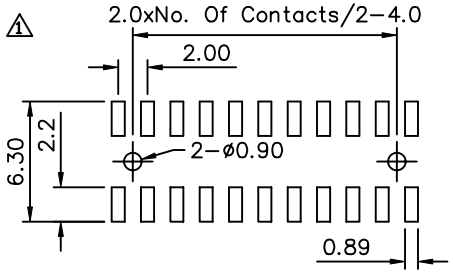

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

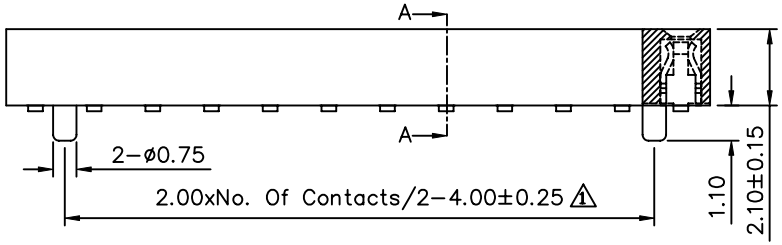

Section B−B

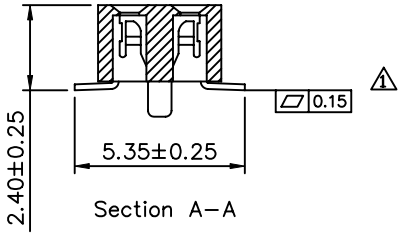

Section A−A

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.	DRAWING No. 15966	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ⚠1.X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°	⚠1 A1	Modify Data HZF 02/20/2009
		CHECKED BY HZF		⚠0 A0	NEW RELEASE BECKY 12/01/2004
		DRAWING BY HYY		NO. REV.	REVISIONS CHK DATE
	SCALE NONE	REV. A1	UNIT mm		