
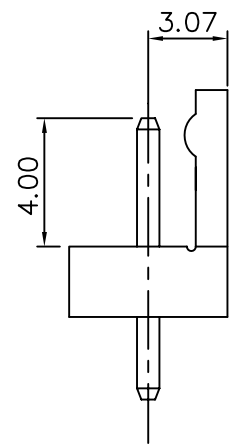
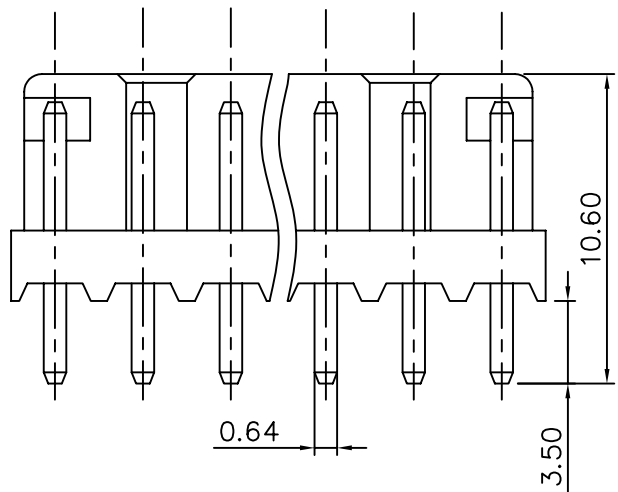
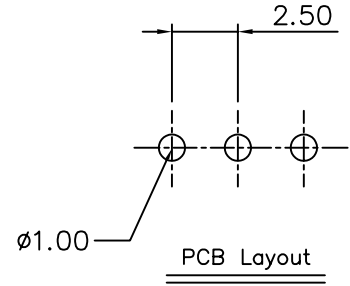


**SPECIFICATIONS**

Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: Initial Value/10Milliohms Max  
 After Enironmental Testing/20Milliohms Max  
 Insulation Resistance: 1000Megohms Min.  
 Temperature Range: -25°C To + 85°C  
 Applicable PC Board Thickness: 16mm  
 Material : Post: Brass, Tin/Plated  
 Base: Nylon, UL 94V-0  
 Q'ty : 1000 Pcs/Bag

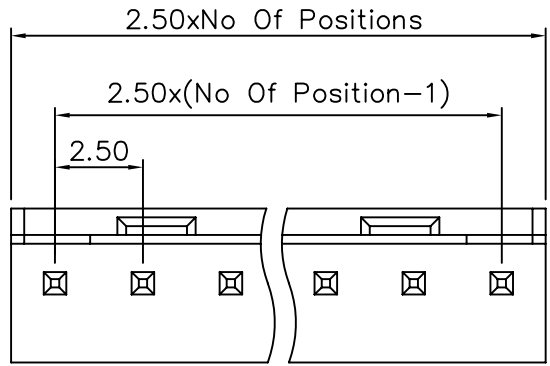

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 .XXX
16124		MEI		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A	NEW RELEASE	RAN	