
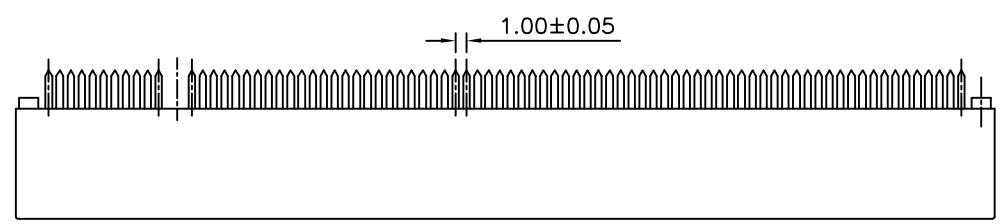



SPECIFICATION

Withstand Voltage: 500V AC/1 Minute
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 30 Milliohms Max.
 Contact Insertion Force: 0.115 Kg Max. Per Contact Pair
 Contact Withdrawal Force: 0.015 Kg Min. Per Contact Pair
 Terminal Retention Force(In Housing): 0.5 Kg Min. Per Terminal
 Operating Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Housing: PA9T+G.F., Black
 Contact: Brass, Gold Plated On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 RoHS Compliant

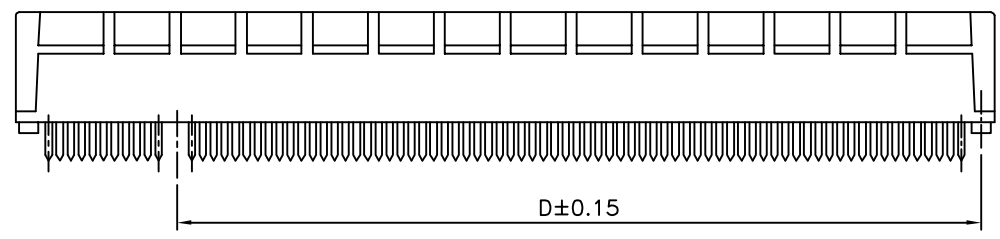

Pin	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ± 0.20 .XX ± 0.10 .XXX ± 0.001 ANG. $\pm 3^{\circ}$
16151		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A0	

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	HZF	12/05/2011
		REVISIONS		