


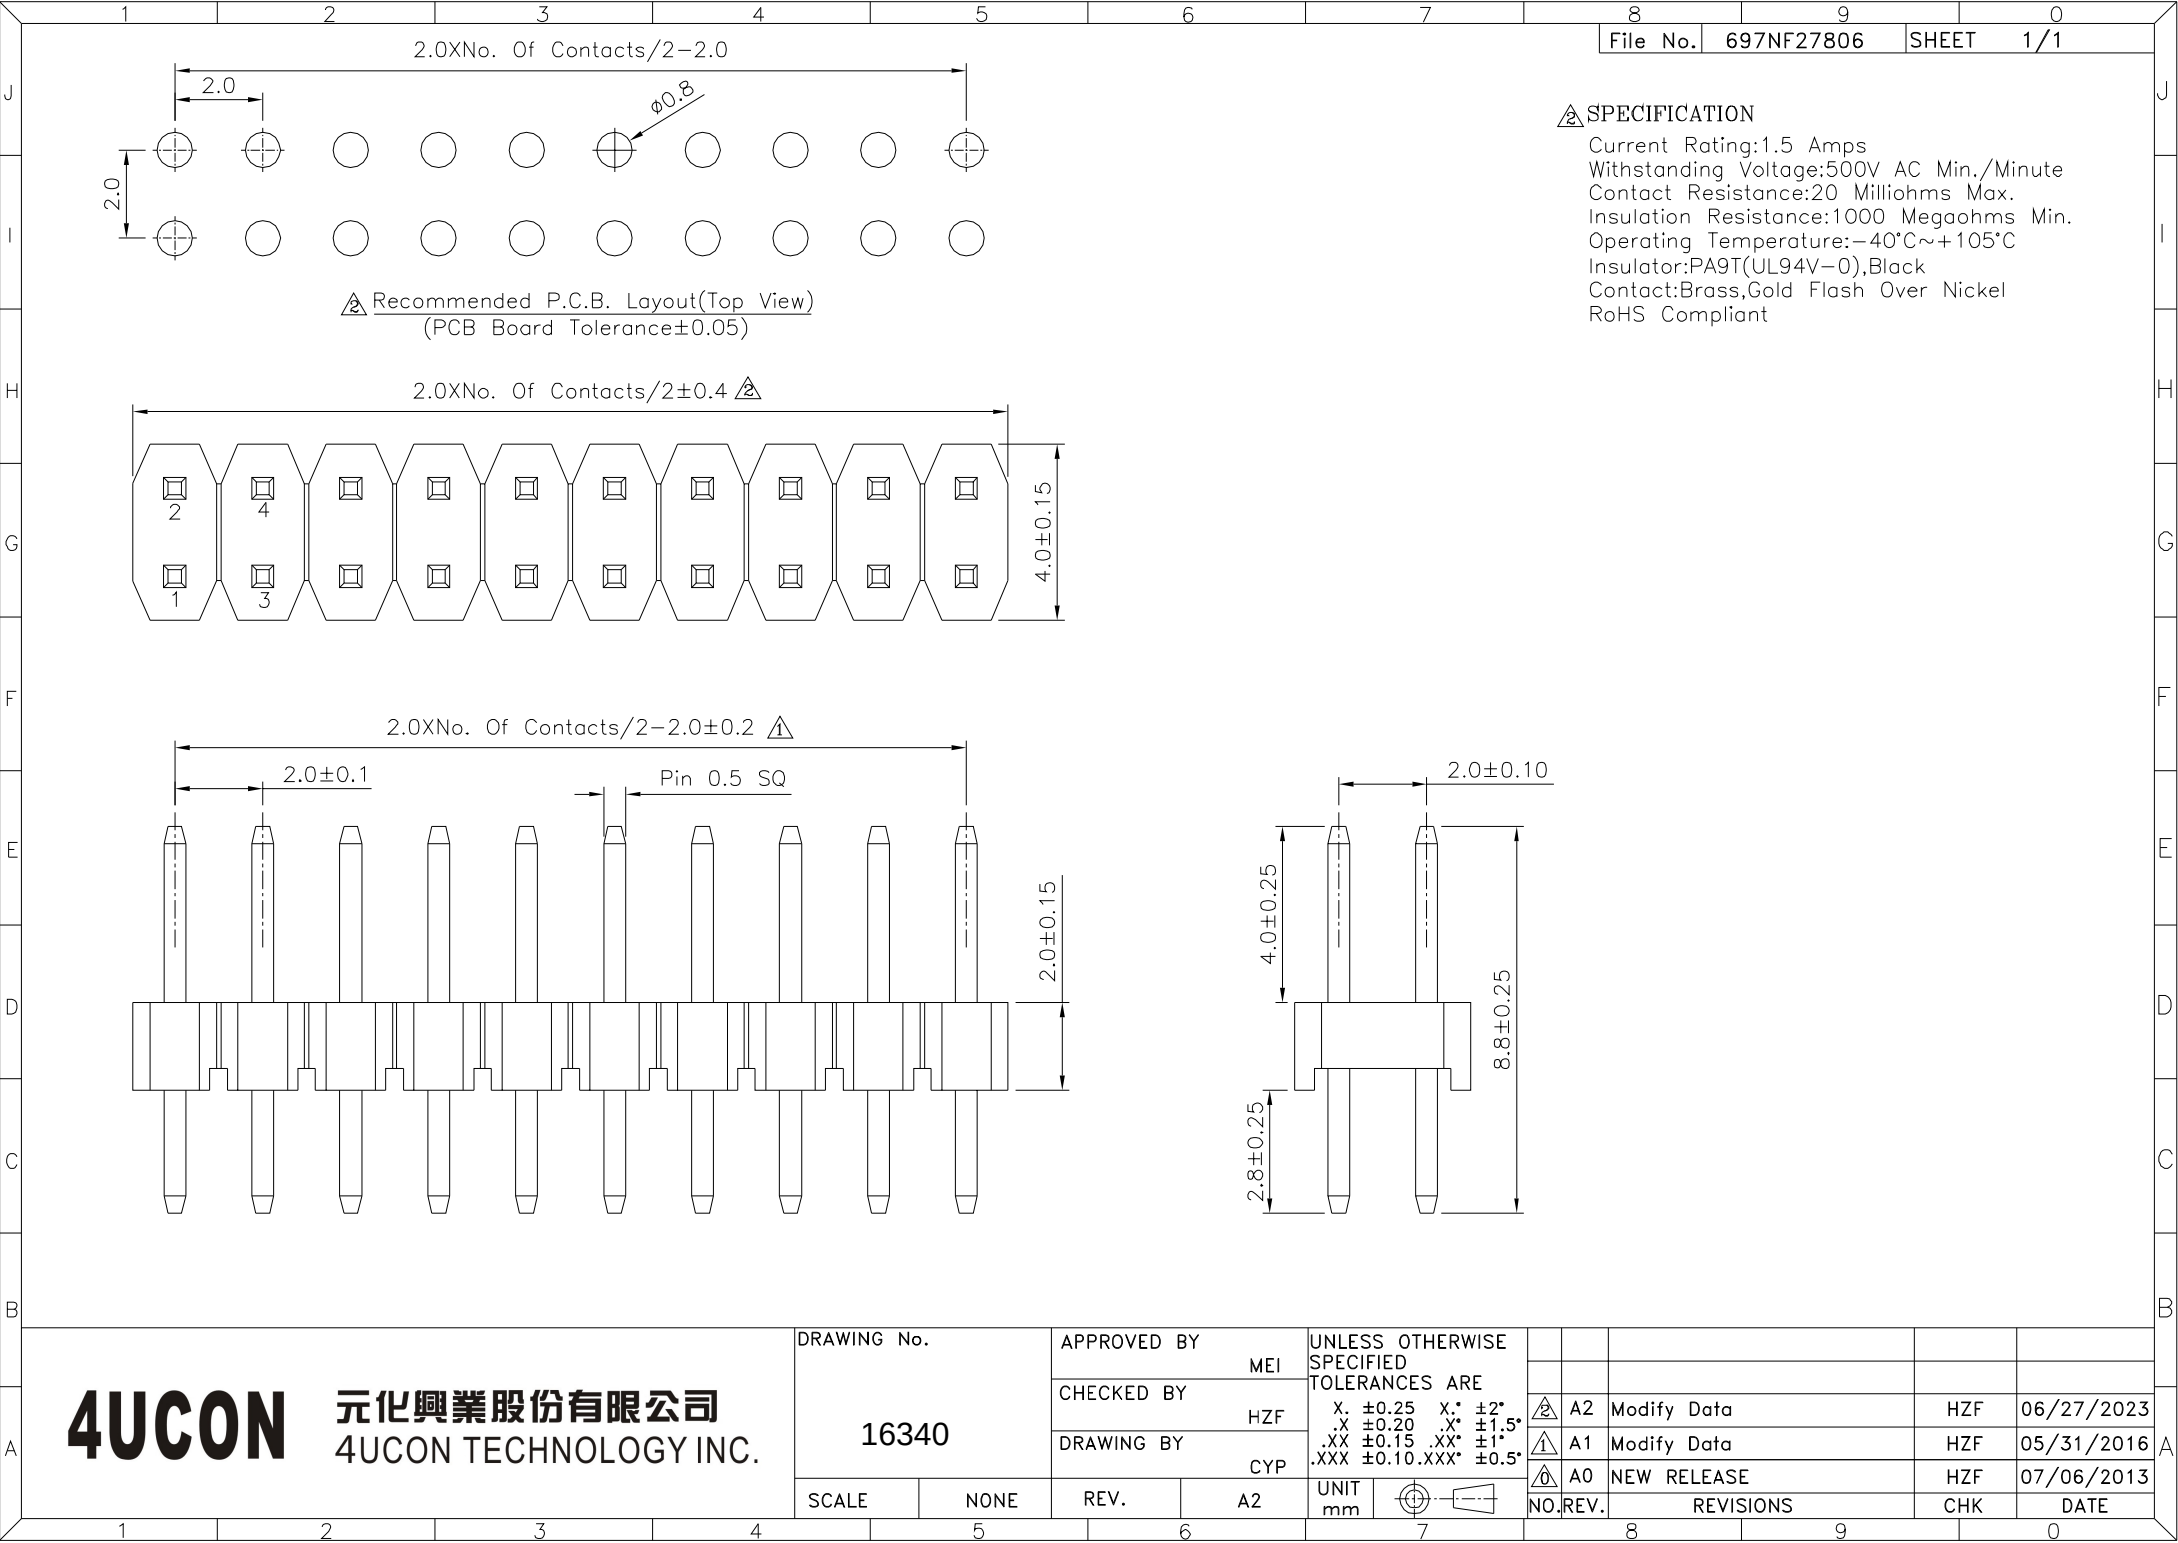

△ SPECIFICATION
Current Rating:1.5 Amps
Withstanding Voltage:500V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

△ Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

2.0XNo. Of Contacts/2±0.4 △

2.0XNo. Of Contacts/2-2.0±0.2 △

2.0±0.1

Pin 0.5 SQ

2.0±0.15

2.0±0.10

4.0±0.25

8.8±0.25

2.8±0.25

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

16340

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

UNIT
mm



△ A2

Modify Data

HZF

06/27/2023

△ A1

Modify Data

HZF

05/31/2016

△ A0

NEW RELEASE

HZF

07/06/2013

NO.REV.

REVISIONS

CHK

DATE