
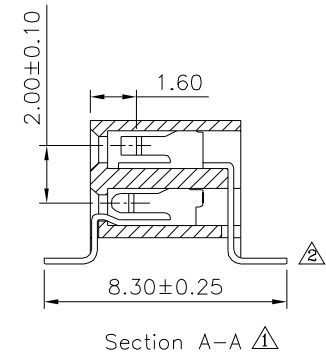
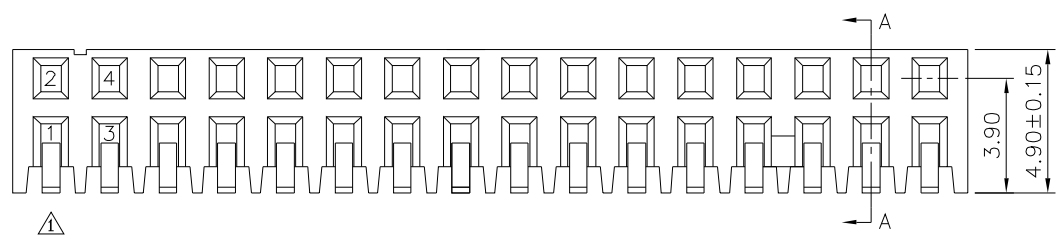


Recommended P.C.B. Layout (Top Side) Δ
(PCB Board Tolerance ± 0.05)

Δ SPECIFICATION
 Current Rating: 2.0 Amp
 Withstand Voltage: 500V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact: Phosphor Bronze, Gold Plated Over Nickel
 Δ Insulator: PA9T+30%G.F.(UL94V-0), Black
 RoHS Compliant

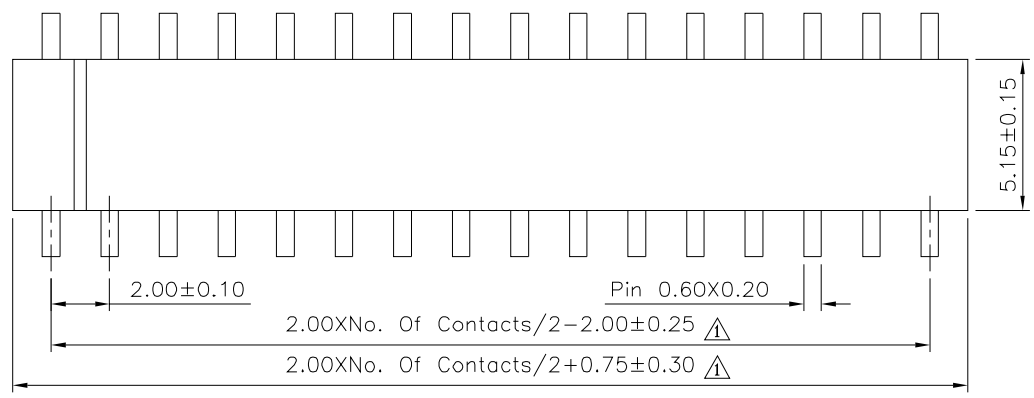

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. Δ		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE Δ .X ± 0.40 .XX ± 0.25 .XXX ± 0.15 ANG. $\pm 3^{\circ}$
16406		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
Δ A2		Modify Data	HZF	04/24/2014
Δ A1		Modify Data	HZF	01/04/2010
Δ A0		NEW RELEASE	BECKY	11/04/2005