
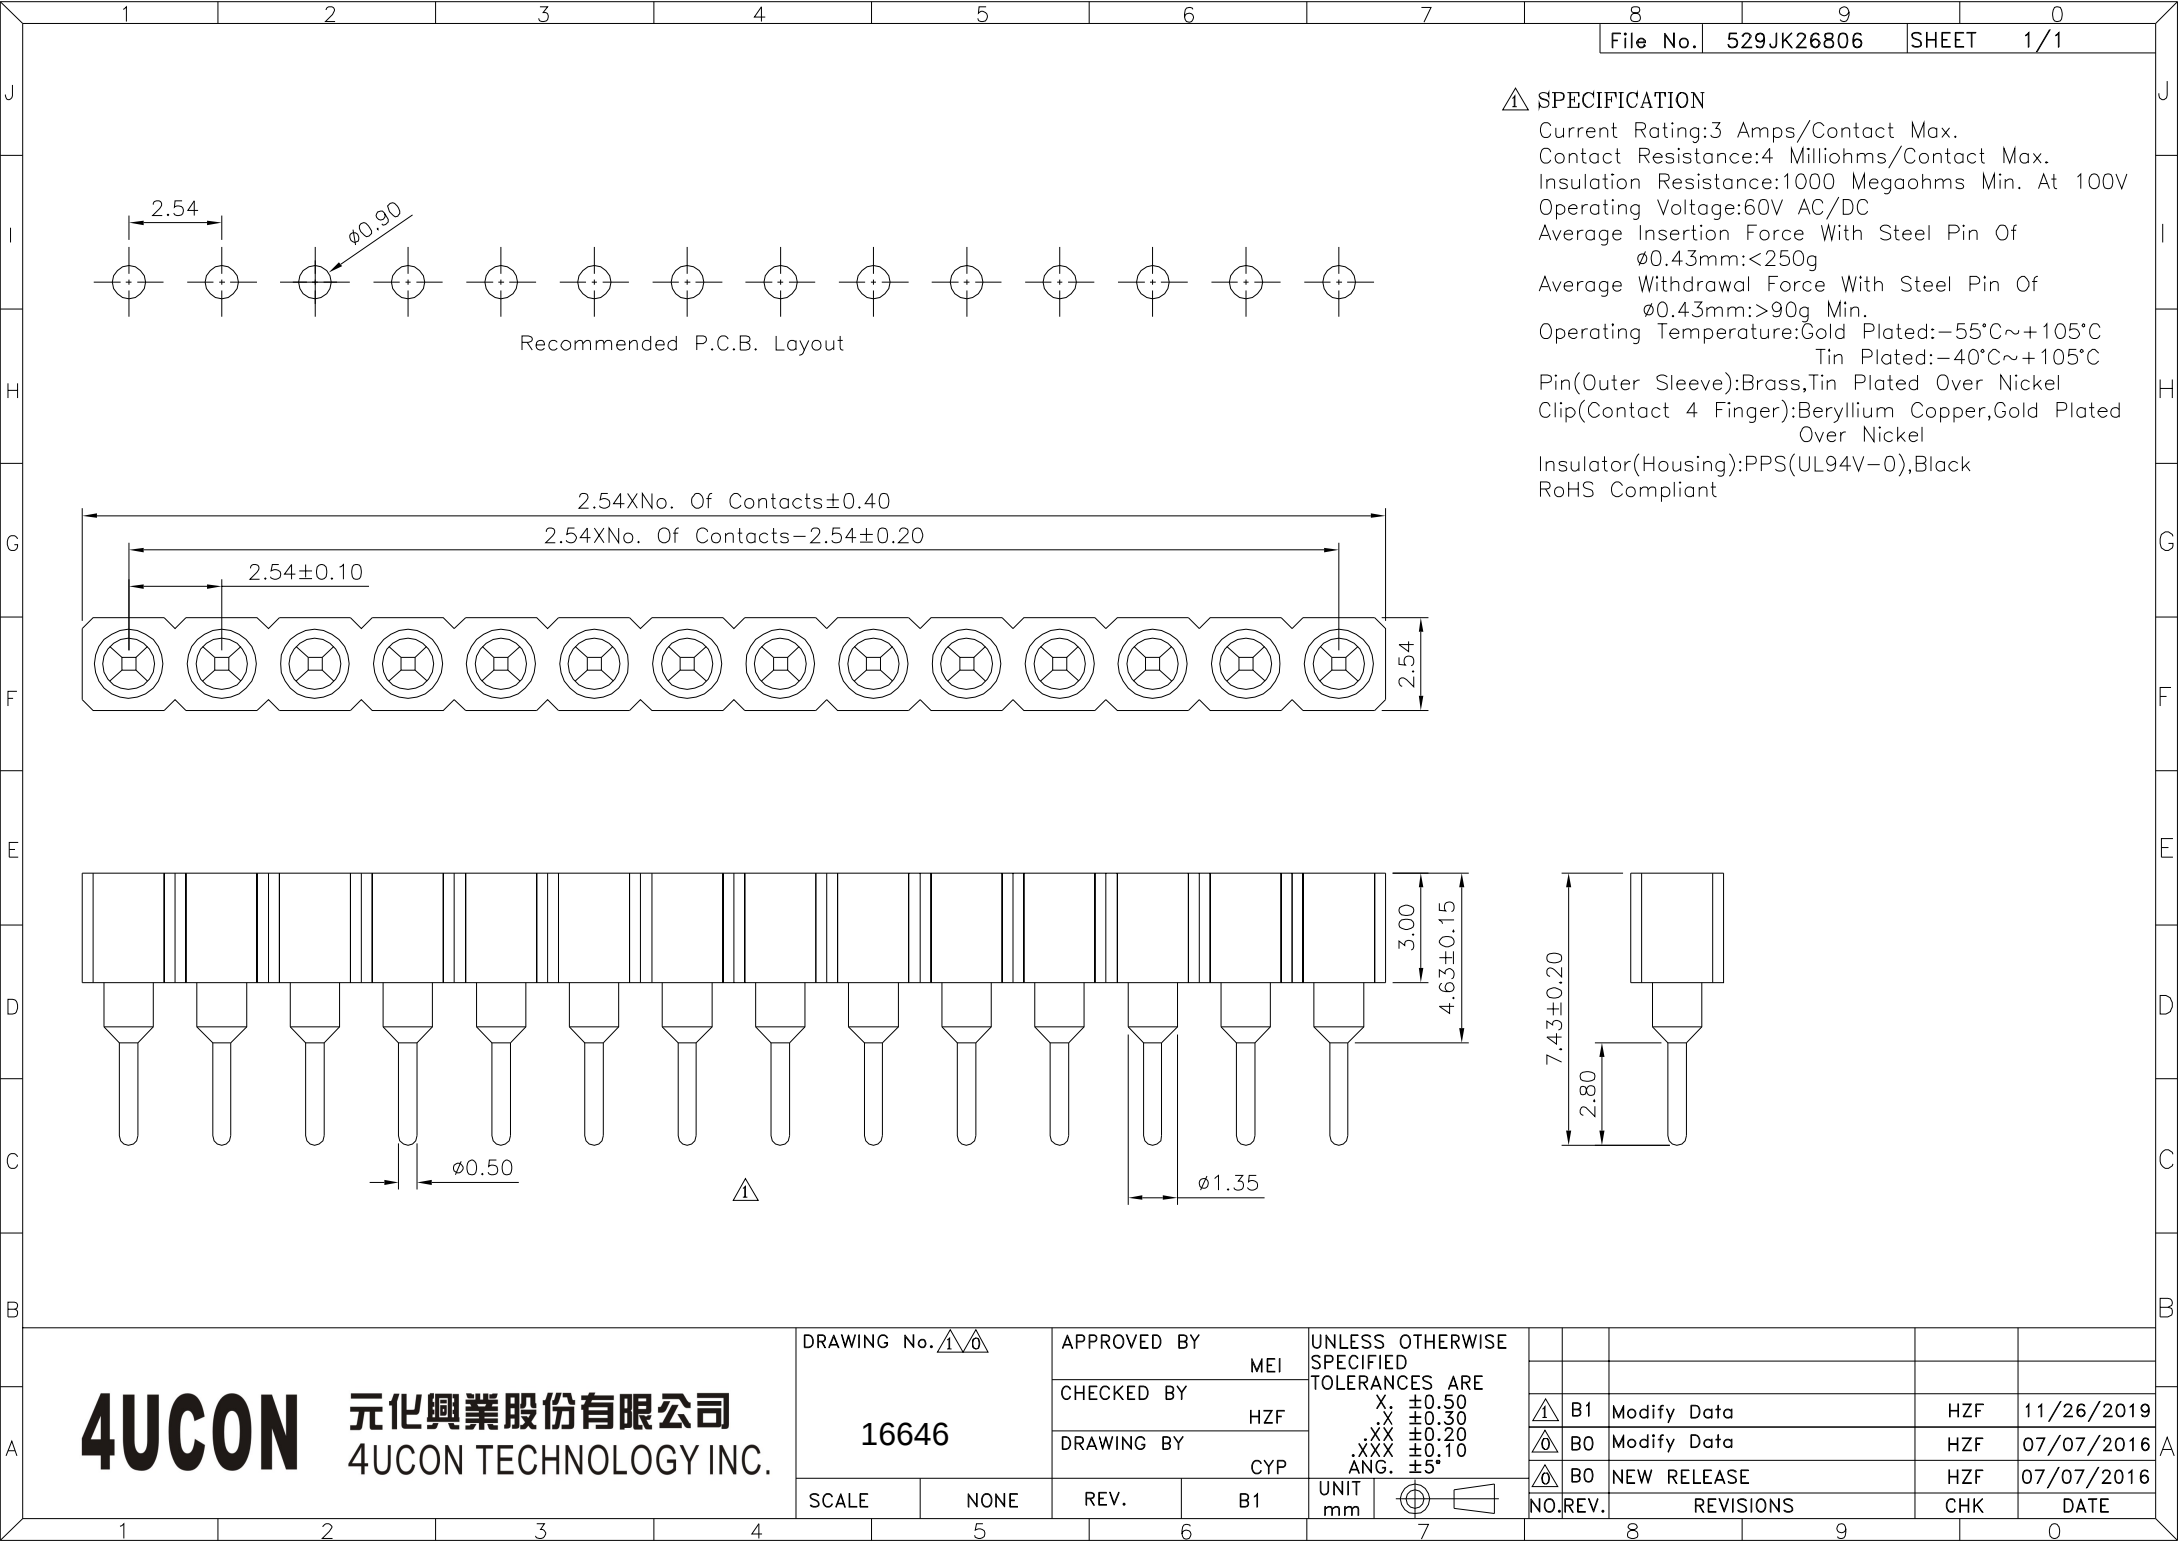




△ SPECIFICATION
Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>90g Min.
Operating Temperature:Gold Plated:-55°C~+105°C
 Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Gold Plated
 Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 XX ±0.30 XXX ±0.20 ANG. ±5°								
		MEI										
		CHECKED BY										
		16646				HZF		 B1	Modify Data		HZF	11/26/2019
						DRAWING BY		 B0	Modify Data		HZF	07/07/2016
		CYP		 B0	NEW RELEASE		HZF	07/07/2016				
SCALE	NONE	REV.	B1	UNIT mm		NO. REV.	REVISIONS	CHK	DATE			