


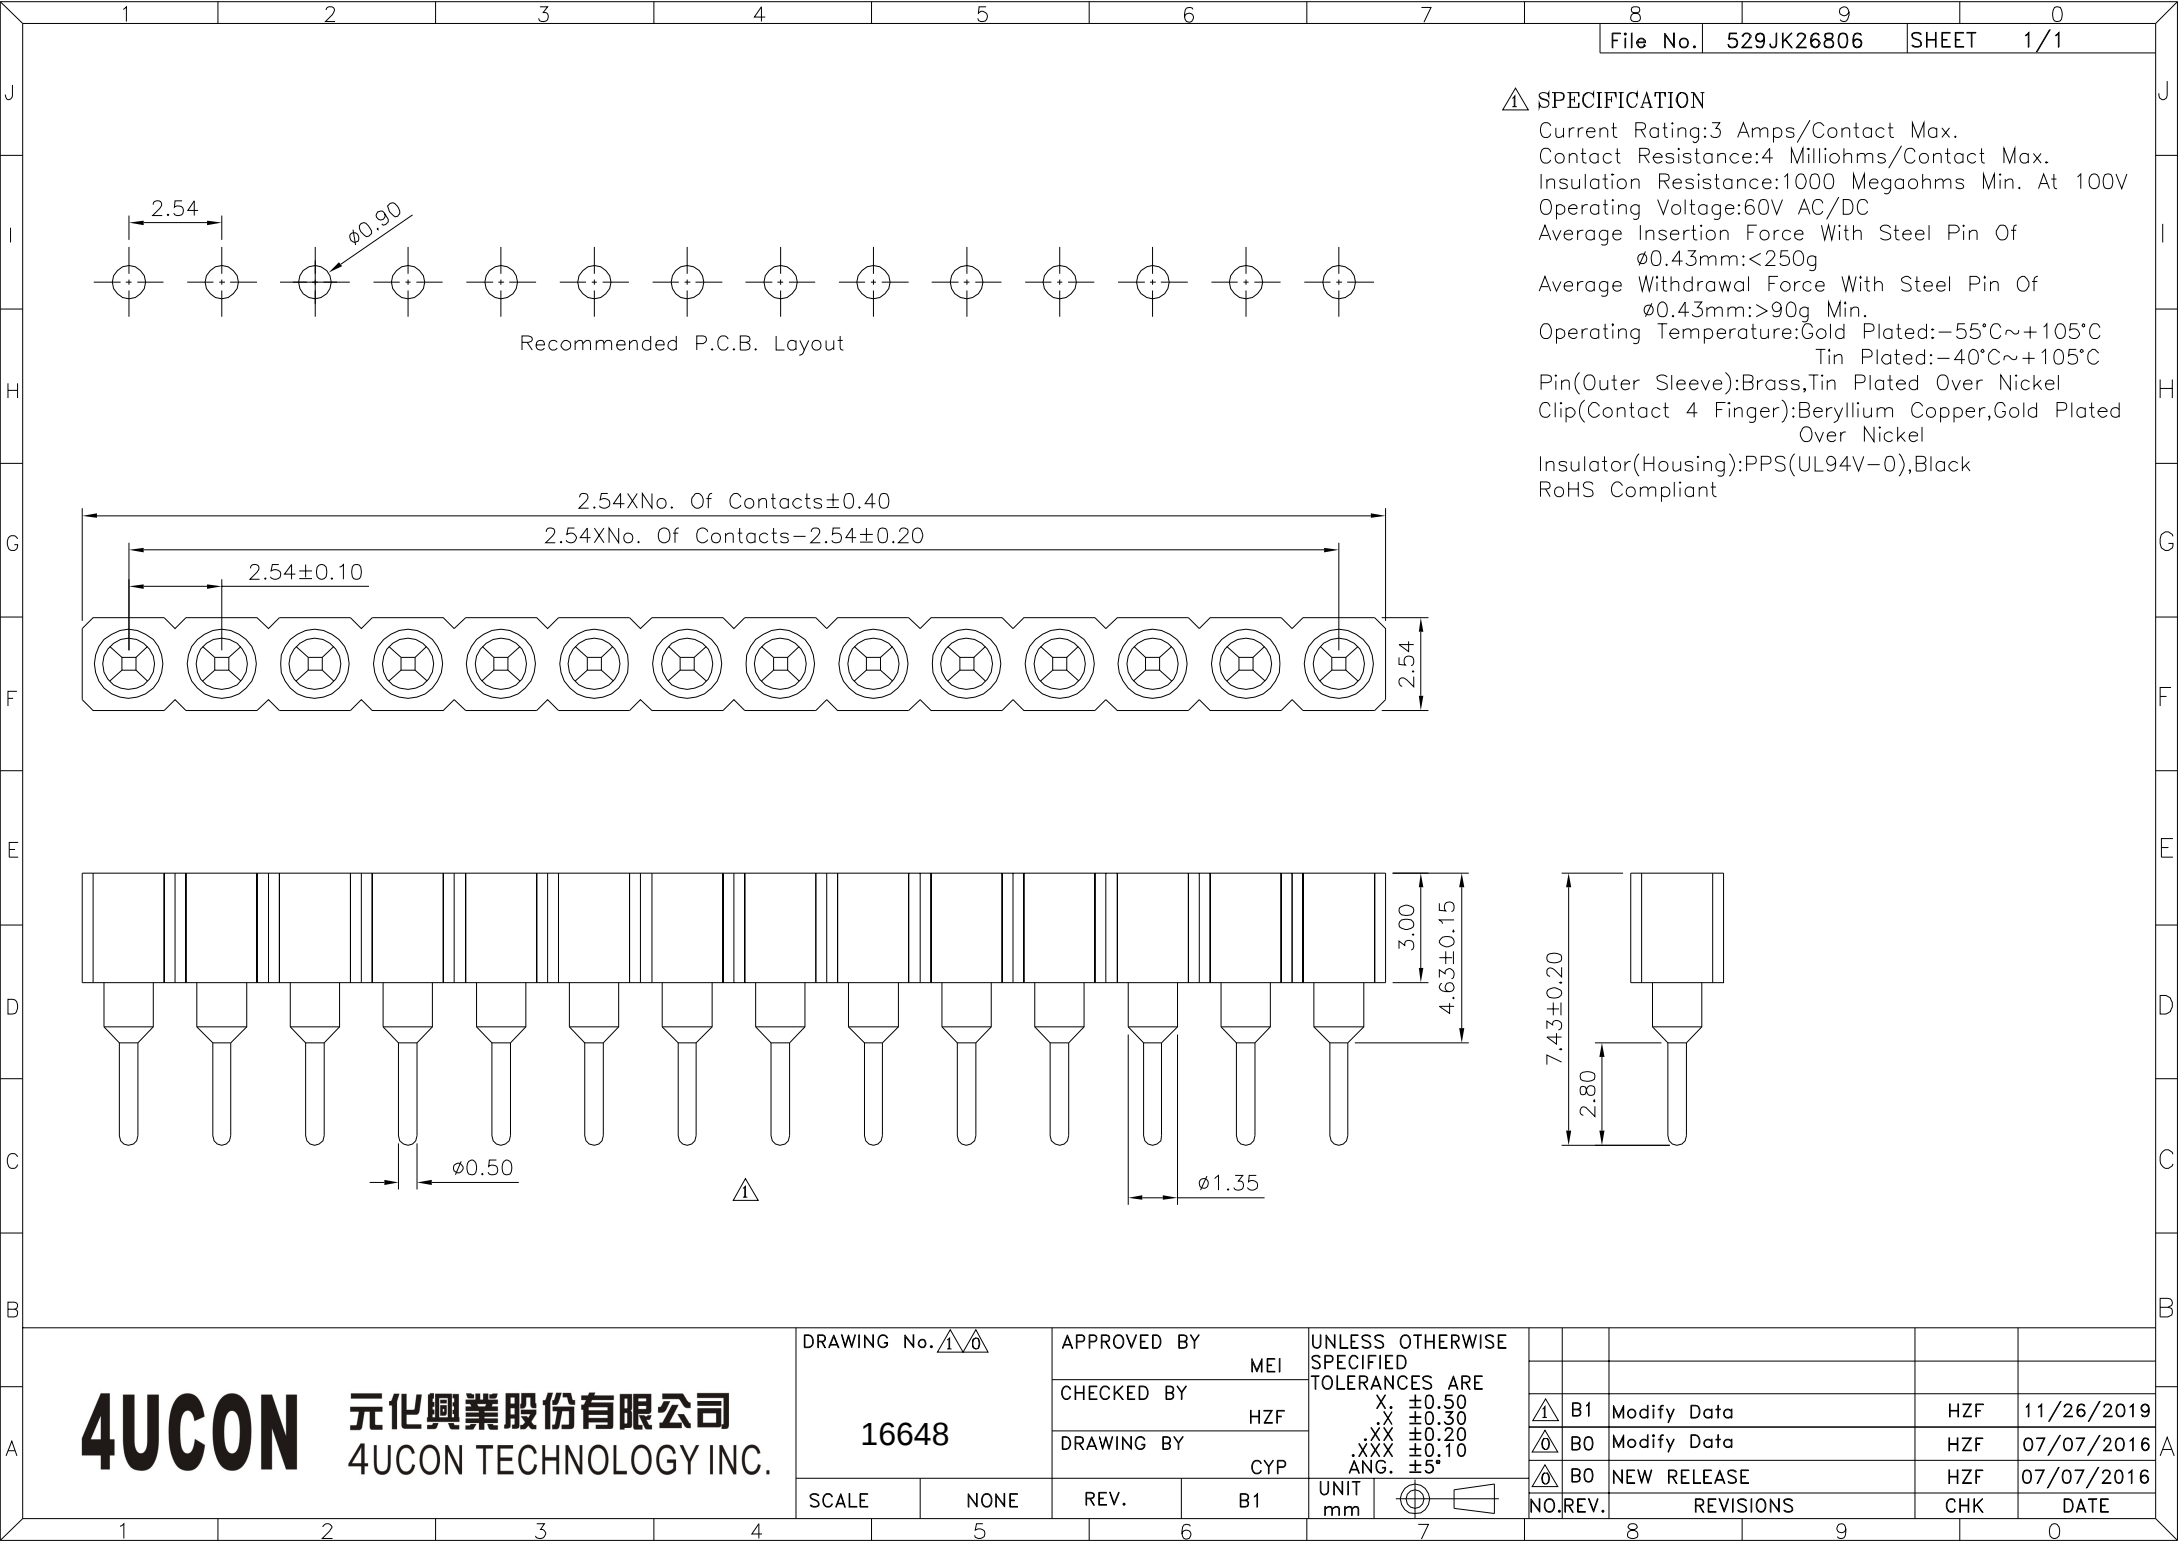
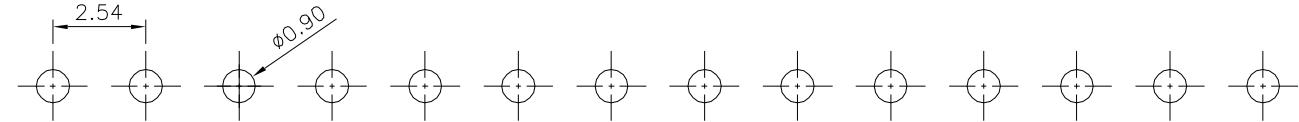




△ SPECIFICATION
Current Rating:3 Amps/Contact Max.
Contact Resistance:4 Milliohms/Contact Max.
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Voltage:60V AC/DC
Average Insertion Force With Steel Pin Of
 ø0.43mm:<250g
Average Withdrawal Force With Steel Pin Of
 ø0.43mm:>90g Min.
Operating Temperature:Gold Plated:-55°C~+105°C
 Tin Plated:-40°C~+105°C
Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
Clip(Contact 4 Finger):Beryllium Copper,Gold Plated
 Over Nickel
Insulator(Housing):PPS(UL94V-0),Black
RoHS Compliant

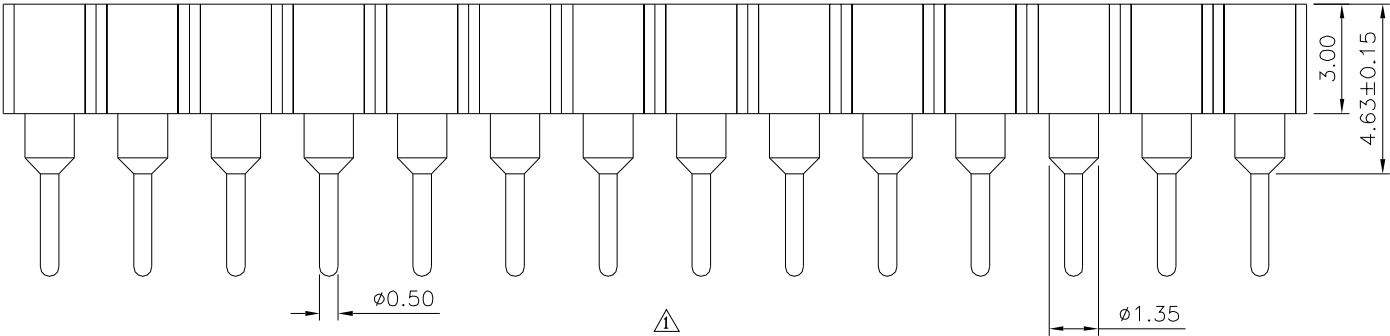

Recommended P.C.B. Layout

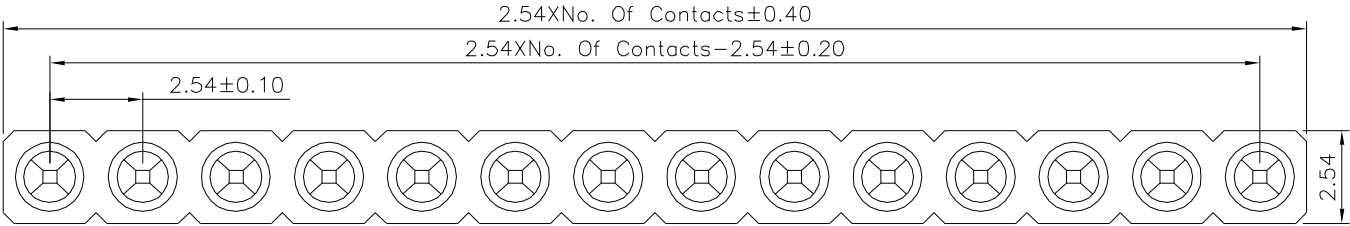

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. **16648**

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
XX ±0.30
XXX ±0.20
ANG. ±5°

SCALE NONE REV. B1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	11/26/2019
△	B0	Modify Data	HZF	07/07/2016
△	B0	NEW RELEASE	HZF	07/07/2016