

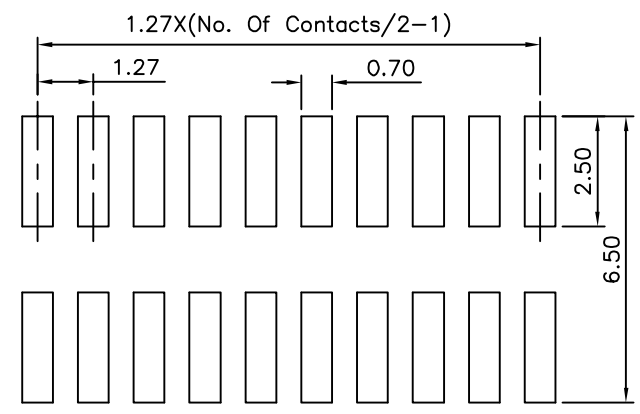



**SPECIFICATION**

Current Rating:1A  
 Dielectric Strength:1000V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:5000 Megaohms Min.  
 Operation Temperature:-55°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:04~100 Contacts  
 RoHS Compliant

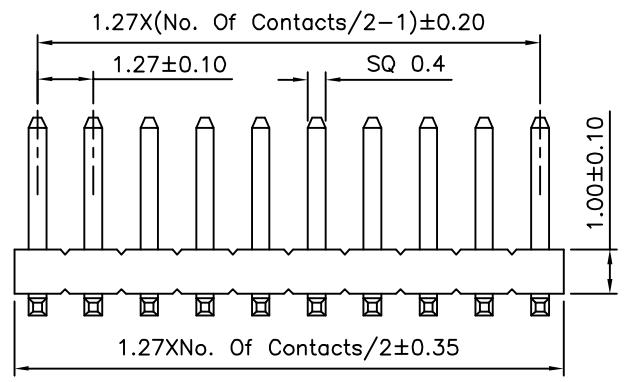

Recommended P.C.B. Layout

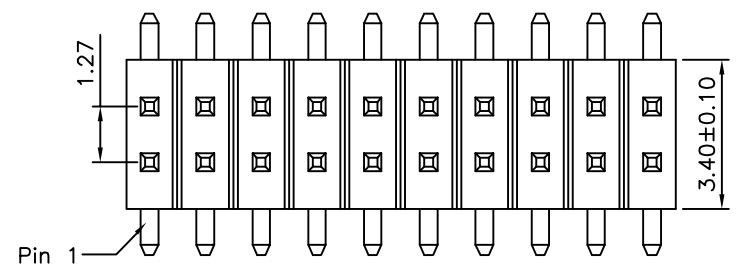

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±5°					
16808		MEI							
		CHECKED BY							
		HZF							
		DRAWING BY							
		GAO							
SCALE	NONE	REV.	CO	UNIT		△ CO	NEW RELEASE	HZF	04/17/2013
				mm		NO.REV.	REVISIONS	CHK	DATE