

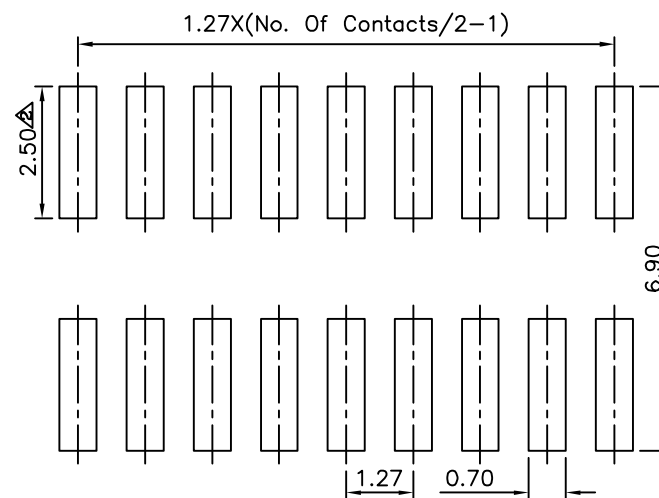
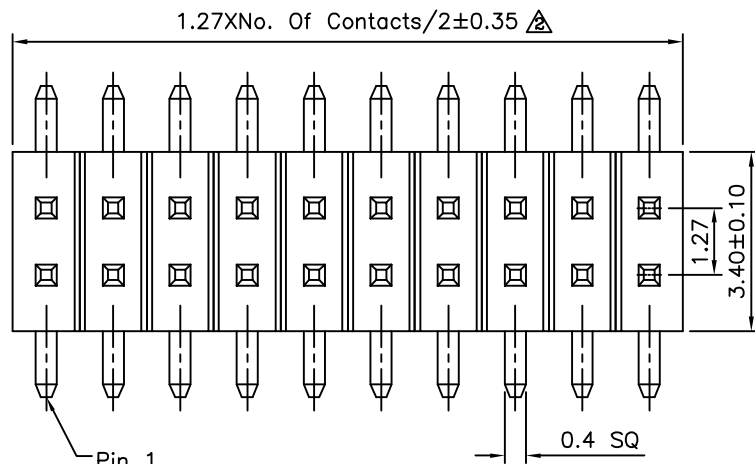


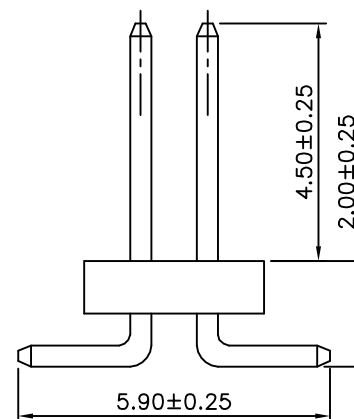

SPECIFICATION

Current:1A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
Dielectric Strength:1000V AC/Minute
Operating Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:04~100 Contacts
RoHS Compliant

Recommended P.C.B. Layout

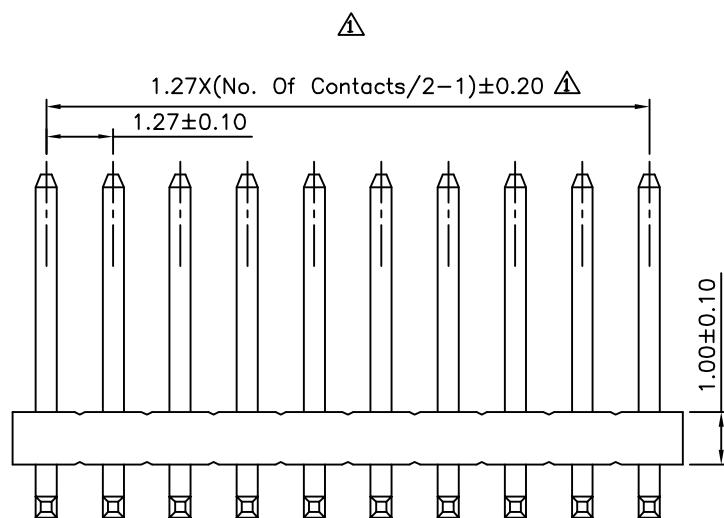

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

16853

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	11/26/2013
A2		Modify Data	HZF	05/17/2011
A1		Modify Data	HZF	11/13/2009
A0		NEW RELEASE	BECKY	02/04/2005