

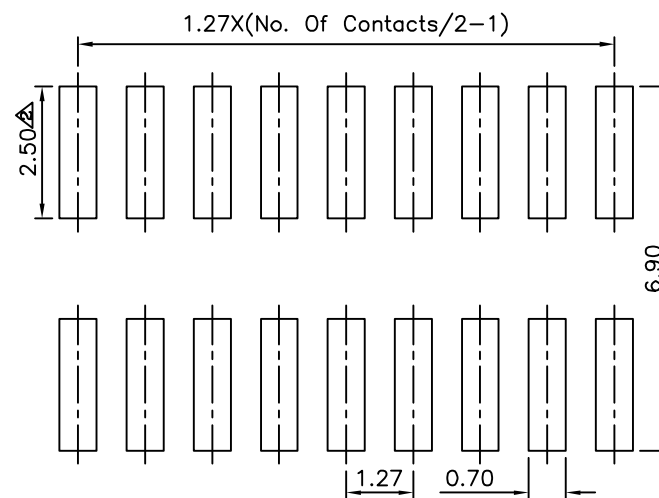
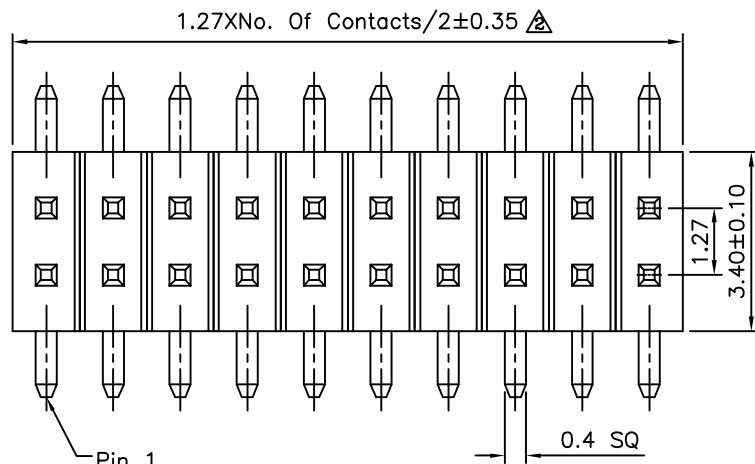


# △△ SPECIFICATION

Current:1A  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:5000 Megaohms Min.  
Dielectric Strength:1000V AC/Minute  
Operating Temperature:-55°C~+105°C  
Housing:PA6T(UL94V-0),Black  
△ Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:04~100 Contacts  
RoHS Compliant

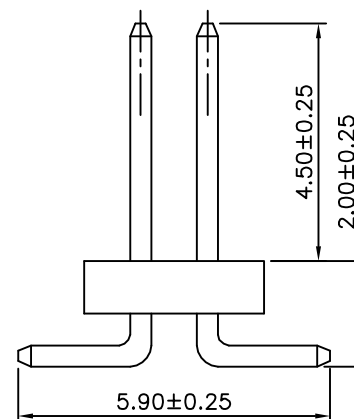

## △ Recommended P.C.B. Layout

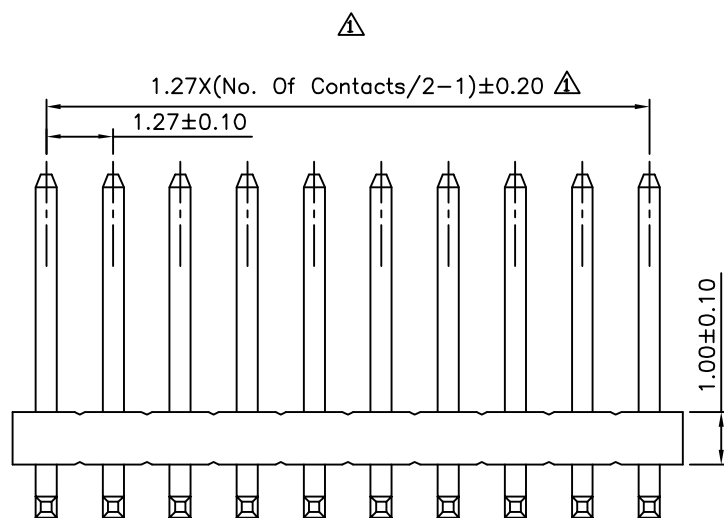

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

16855

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3


UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT  
mm



| NO. | REV. | REVISIONS   | CHK   | DATE       |
|-----|------|-------------|-------|------------|
| △   | A3   | Modify Data | HZF   | 11/26/2013 |
| △   | A2   | Modify Data | HZF   | 05/17/2011 |
| △   | A1   | Modify Data | HZF   | 11/13/2009 |
| △   | A0   | NEW RELEASE | BECKY | 02/04/2005 |