

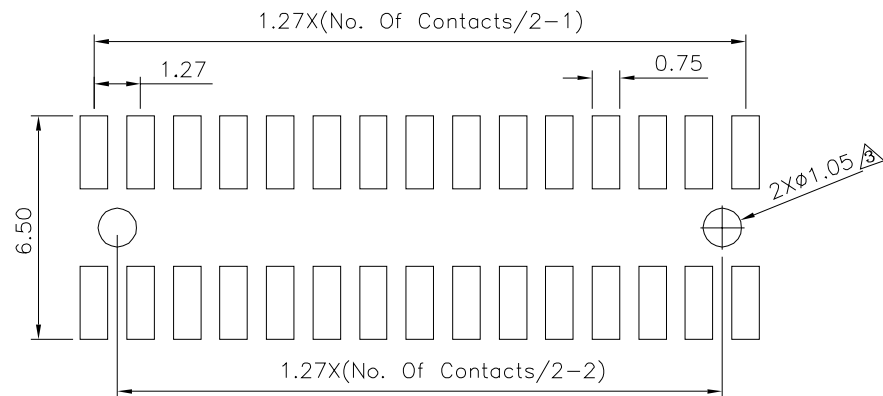
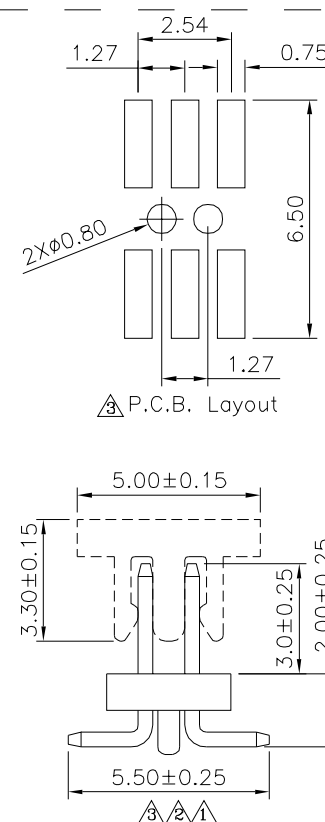
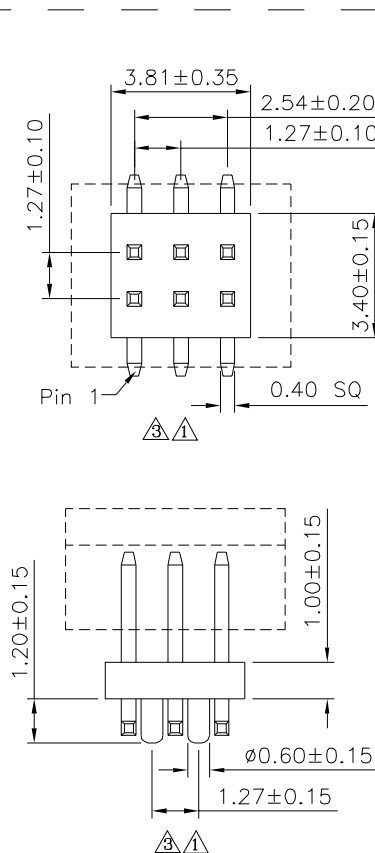
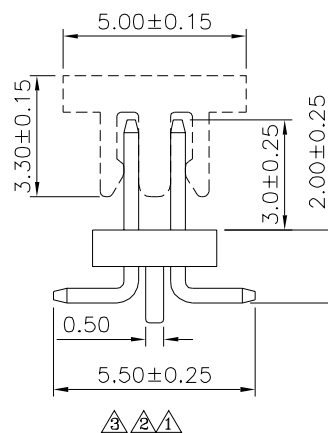


**△△△ SPECIFICATION**  
 Current Rating:1A  
 Voltage Rating:100V AC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~100 Contacts  
 RoHS Compliant

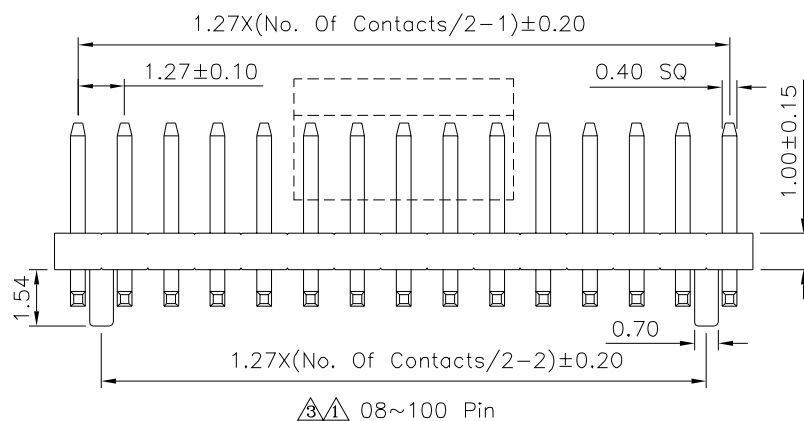

Recommended P.C.B. Layout

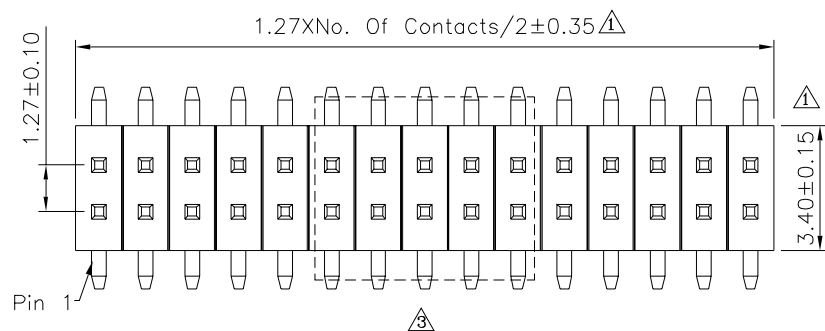

06 Pin

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △

16911

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A3

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE △

.X ±0.38

.XX ±0.25

.XXX ±0.05

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

△ A3 Modify Data HZF 09/06/2024

△ A2 Modify Data HZF 09/22/2016

△ A1 Modify Data HZF 07/29/2011

△ A0 NEW RELEASE HZF 12/02/2008