






SPECIFICATION





Current Rating:1A
Voltage Rating:100V AC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~100 Contacts
RoHS Compliant

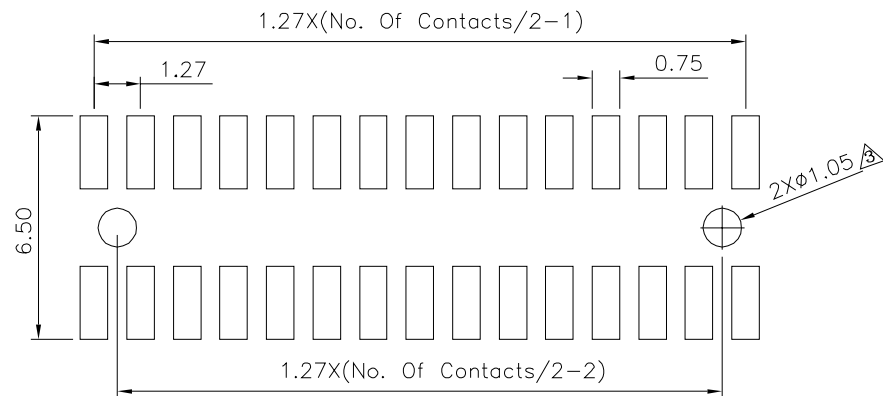


Recommended P.C.B. Layout

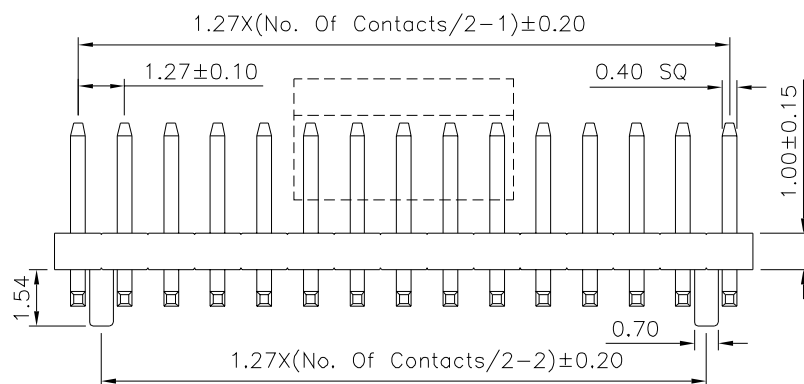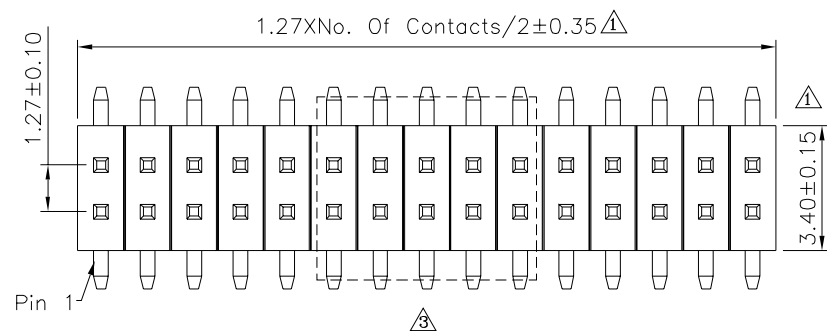

08~100 Pin

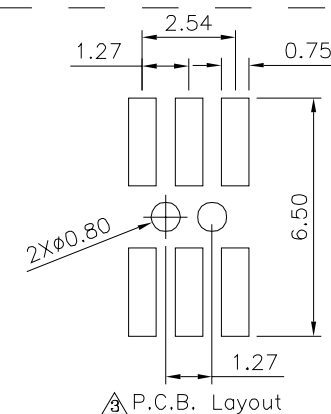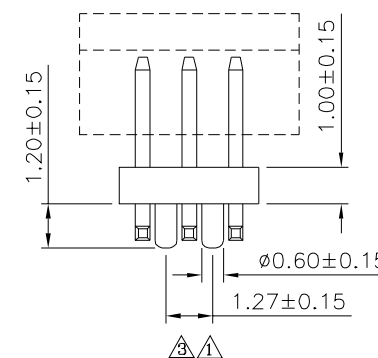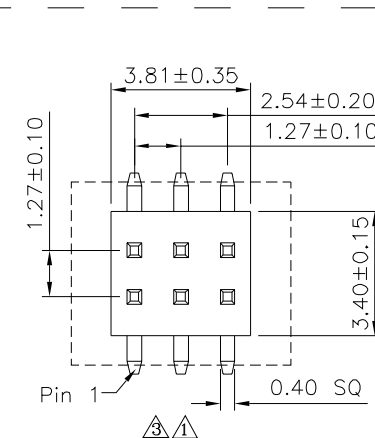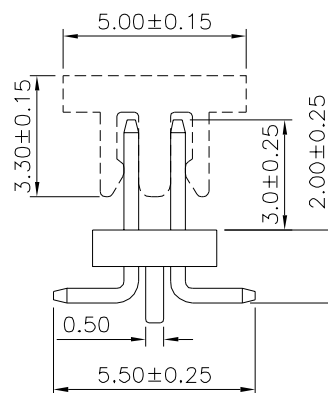

P.C.B. Layout



06 Pin

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16920

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25
.XXX ±0.05

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
1	A3	Modify Data	HZF	09/06/2024
2	A2	Modify Data	HZF	09/22/2016
3	A1	Modify Data	HZF	07/29/2011
4	A0	NEW RELEASE	HZF	12/02/2008