

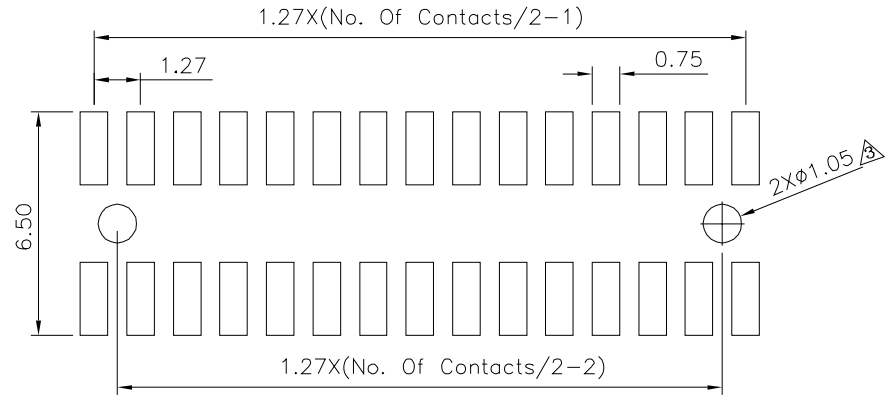
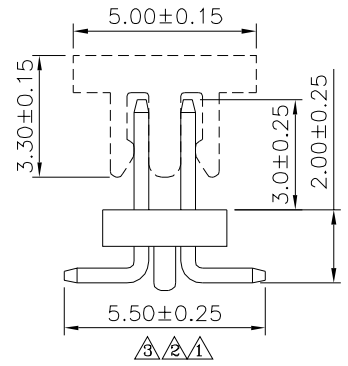
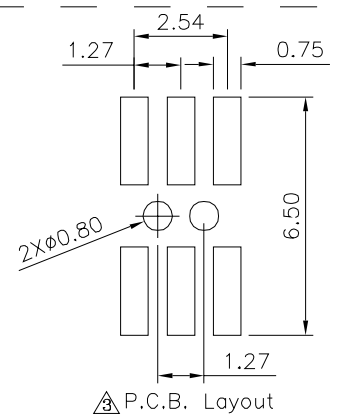
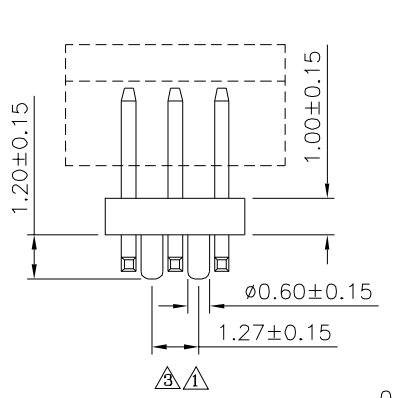
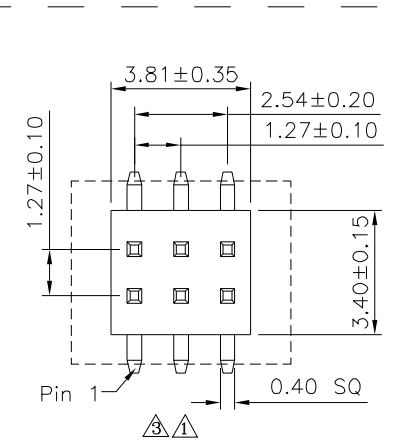
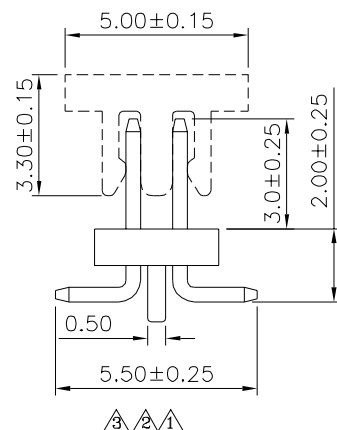


**3.2.1 SPECIFICATION**  
Current Rating:1A  
Voltage Rating:100V AC  
Withstand Voltage:500V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:06~100 Contacts  
RoHS Compliant

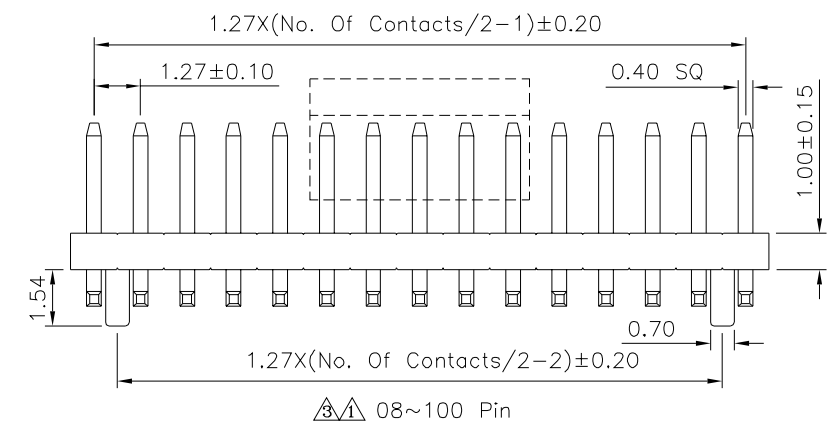

Recommended P.C.B. Layout

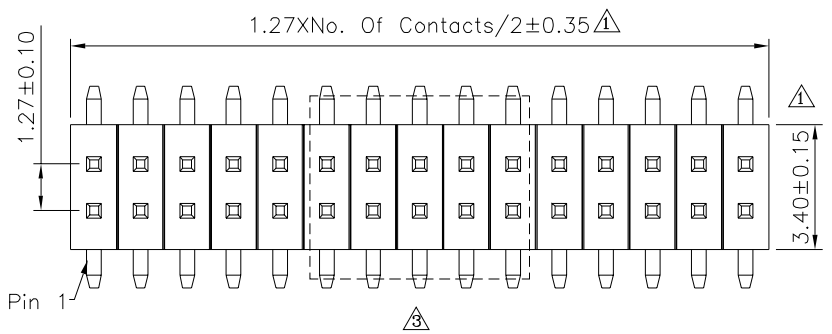

|                   |      |                 |    |
|-------------------|------|-----------------|----|
| DRAWING No. 16927 |      | APPROVED BY MEI |    |
|                   |      | CHECKED BY HZF  |    |
|                   |      | DRAWING BY CYP  |    |
| SCALE             | NONE | REV.            | A3 |

|                                           |       |           |      |
|-------------------------------------------|-------|-----------|------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE |       |           |      |
| .X                                        | ±0.38 |           |      |
| .XX                                       | ±0.25 |           |      |
| .XXX                                      | ±0.05 |           |      |
| UNIT                                      | mm    |           |      |
| NO. REV.                                  |       | REVISIONS |      |
|                                           |       | CHK       | DATE |
|                                           |       |           |      |
|                                           |       |           |      |
|                                           |       |           |      |
|                                           |       |           |      |