




△△△ SPECIFICATION
 Current Rating:1A
 Voltage Rating:100V AC
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

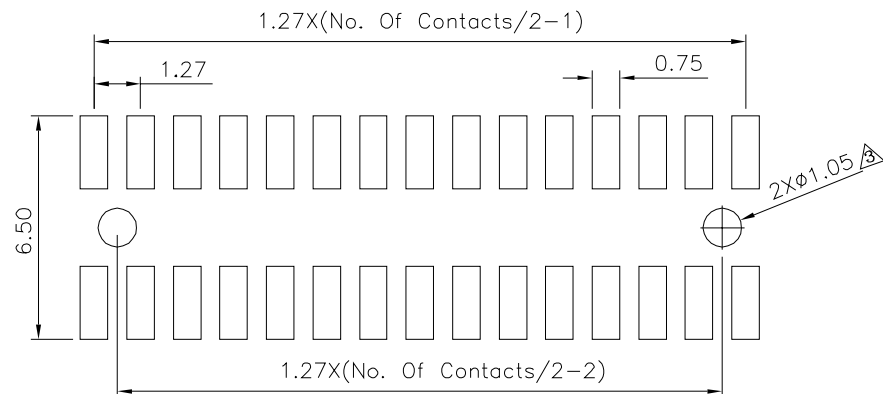


Recommended P.C.B. Layout

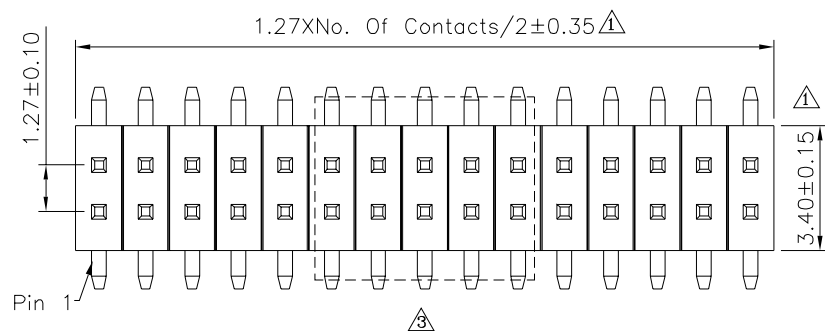


1.27X(No. Of Contacts/2-1)±0.20

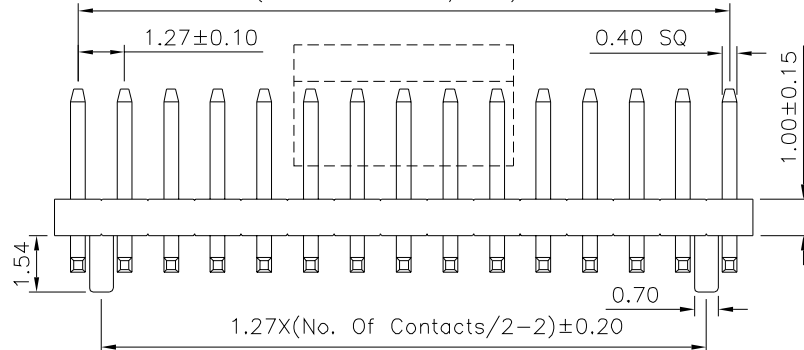


△△△ 08~100 Pin

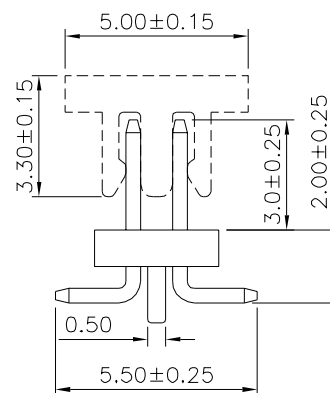


△△△

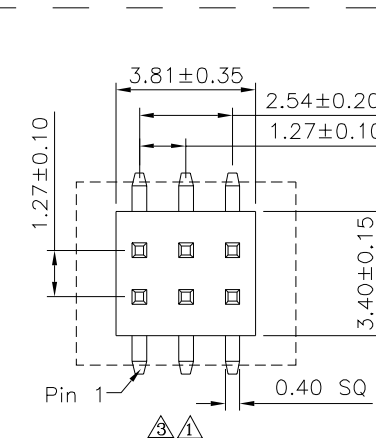


△△△

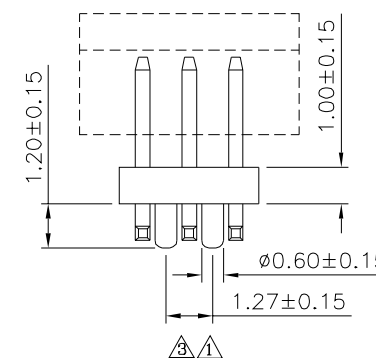

△△△

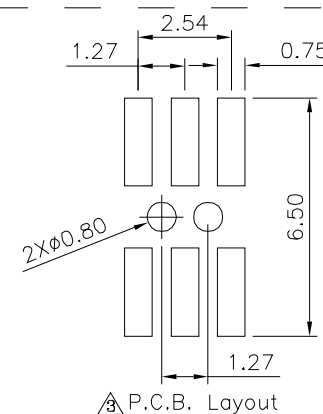

△△△ P.C.B. Layout

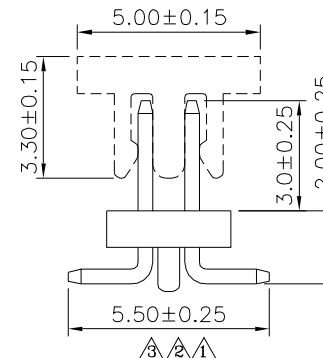

△△△

06 Pin

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

16929

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX ±0.05

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	09/06/2024
△	A2	Modify Data	HZF	09/22/2016
△	A1	Modify Data	HZF	07/29/2011
△	A0	NEW RELEASE	HZF	12/02/2008