

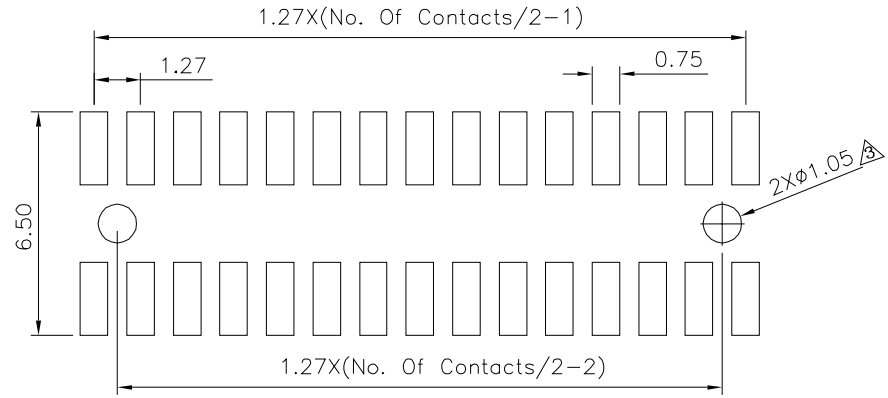
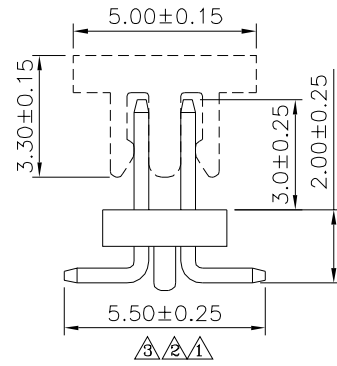
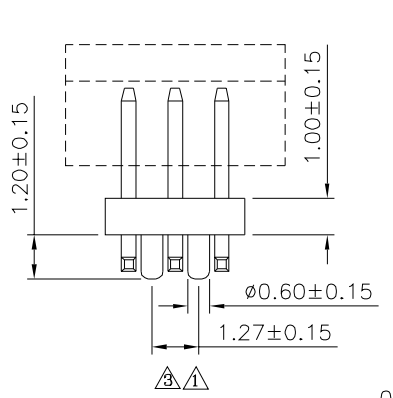
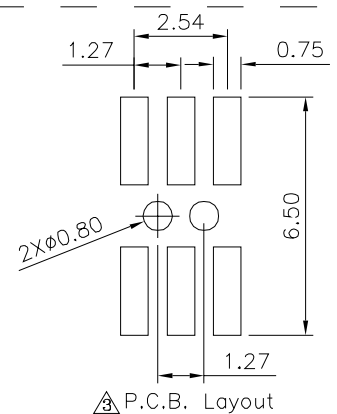
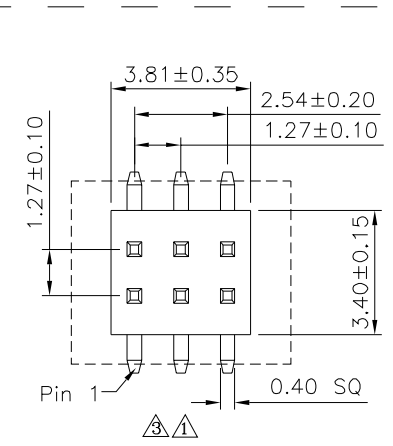
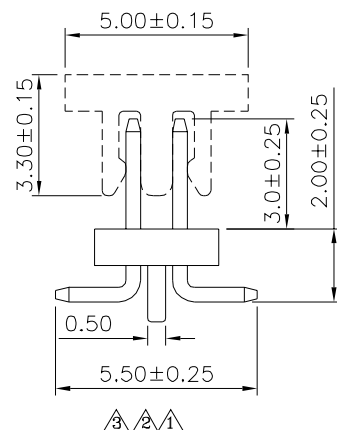


3.2.1 SPECIFICATION
Current Rating:1A
Voltage Rating:100V AC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~100 Contacts
RoHS Compliant

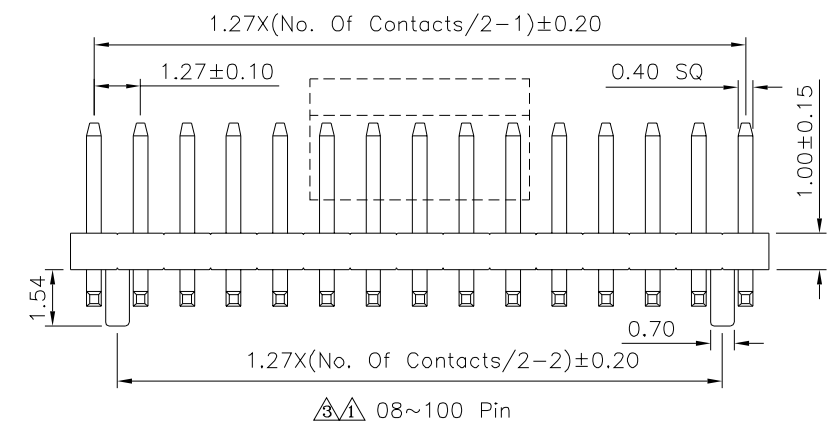

Recommended P.C.B. Layout

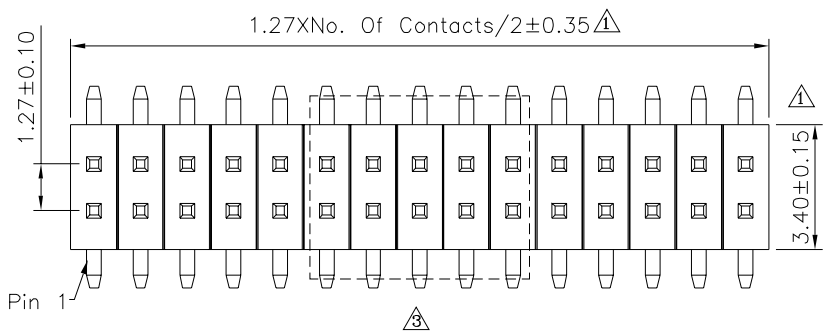

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 16936		APPROVED BY MEI	
		CHECKED BY HZF	
		DRAWING BY CYP	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
.X	±0.38		
.XX	±0.25		
.XXX	±0.05		
UNIT	mm		
NO.	REV.		
1	A3	Modify Data	HZF 09/06/2024
2	A2	Modify Data	HZF 09/22/2016
3	A1	Modify Data	HZF 07/29/2011
4	A0	NEW RELEASE	HZF 12/02/2008
		REVISIONS	CHK DATE