

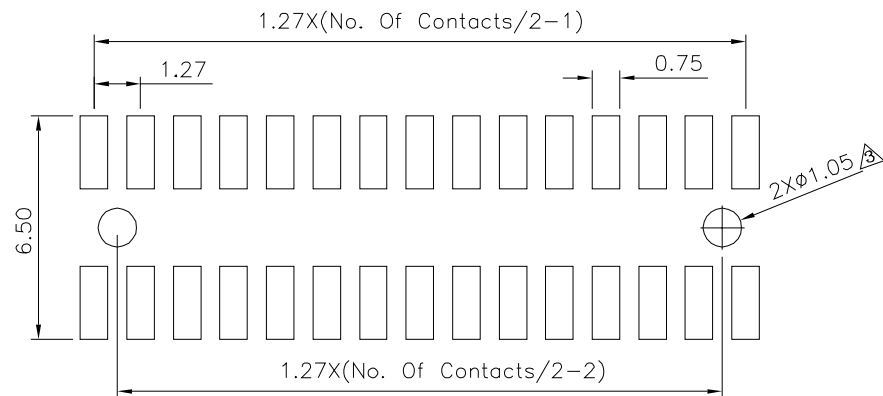
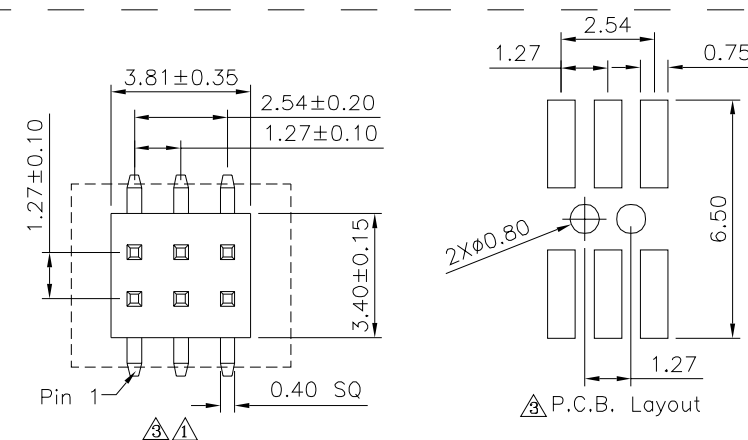
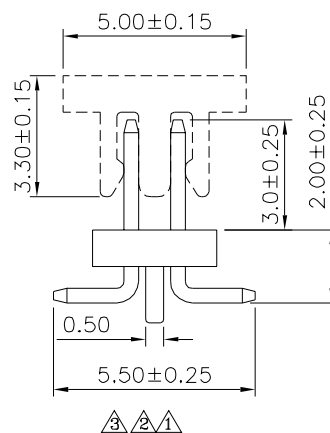



**△△△ SPECIFICATION**  
 Current Rating:1A  
 Voltage Rating:100V AC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 No. Of Contacts:06~100 Contacts  
 RoHS Compliant

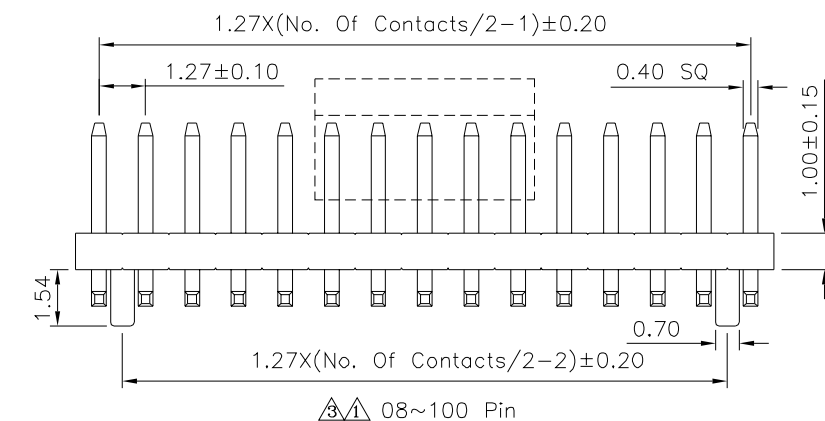


Recommended P.C.B. Layout

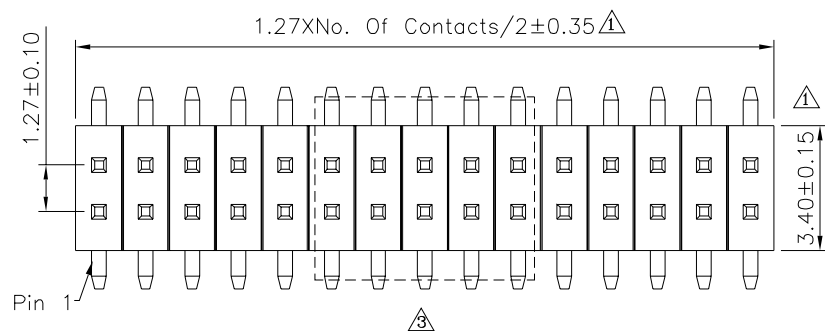

P.C.B. Layout

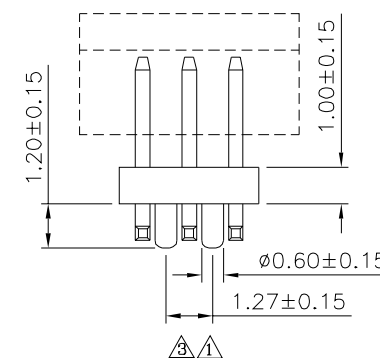

06 Pin

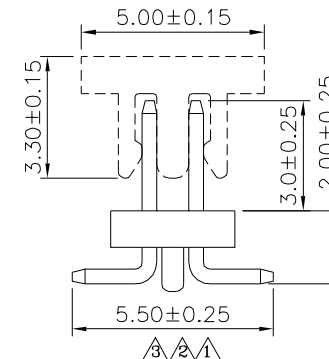

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △

16939

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 .XXX ±0.05

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A3   | Modify Data | HZF | 09/06/2024 |
| △   | A2   | Modify Data | HZF | 09/22/2016 |
| △   | A1   | Modify Data | HZF | 07/29/2011 |
| △   | A0   | NEW RELEASE | HZF | 12/02/2008 |