

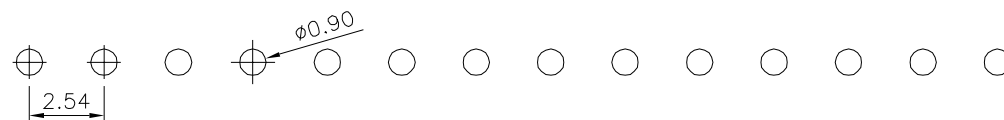

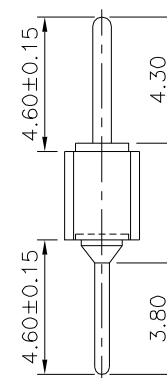


SPECIFICATION

Current Rating: 3 Amps/Contact Max.
 Contact Resistance: 4 Milliohms Max./Contact
 Insulation Resistance: 1000 Megaohms Min. At 100V
 Operating Voltage: 60V AC/DC
 Operating Temperature: -55°C~+105°C
 Pin: Brass, Gold Flash Over All, Over Nickel
 Insulator: PPS(UL94V-0), Black
 RoHS Compliant

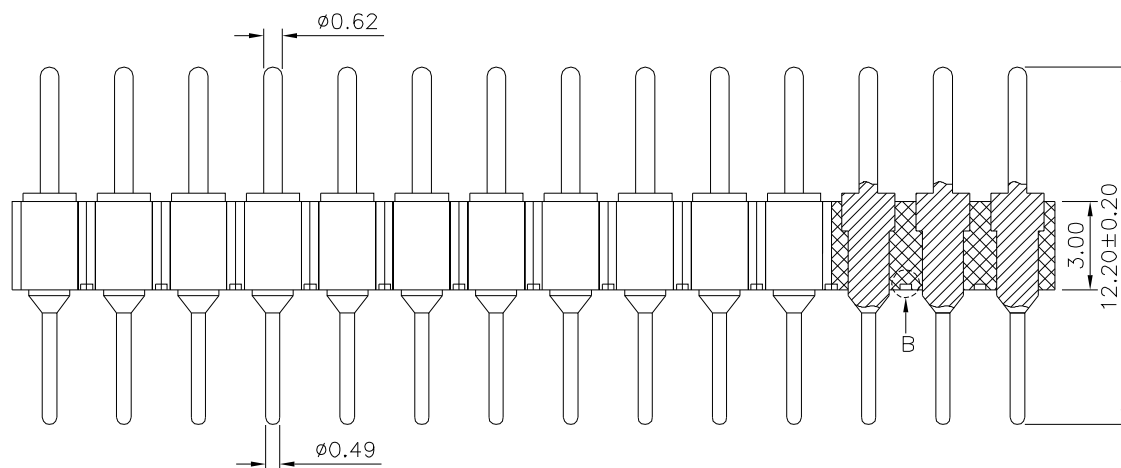

Recommended P.C.B. Layout

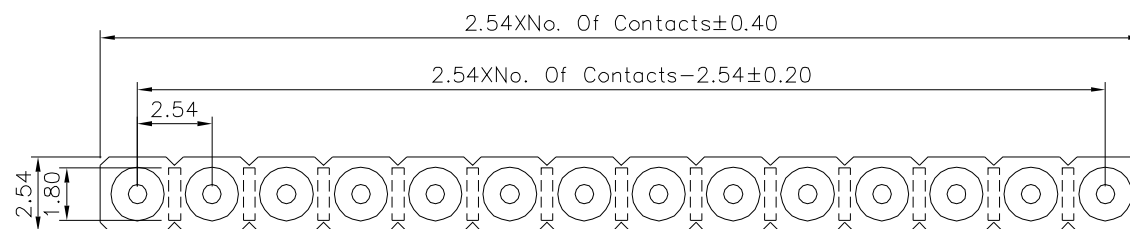

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

16945

APPROVED BY
 MEI

CHECKED BY
 HZF


DRAWING BY
 HAO

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG. $\pm 5^\circ$

SCALE NONE

REV. B0

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ B0		NEW RELEASE	HZF	01/06/2016