

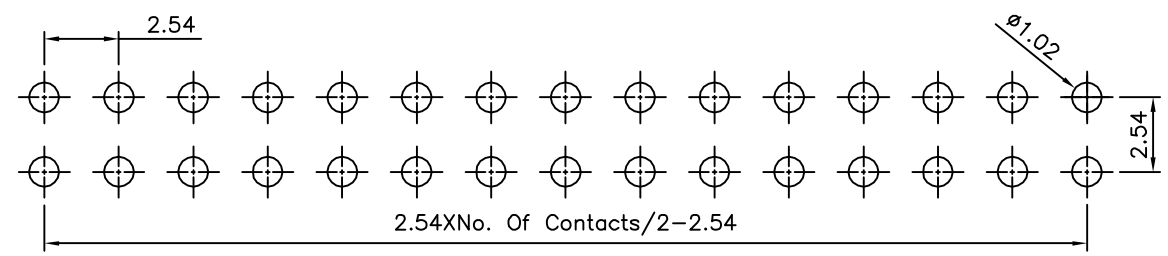



SPECIFICATION
 Current Rating:3 Amps
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

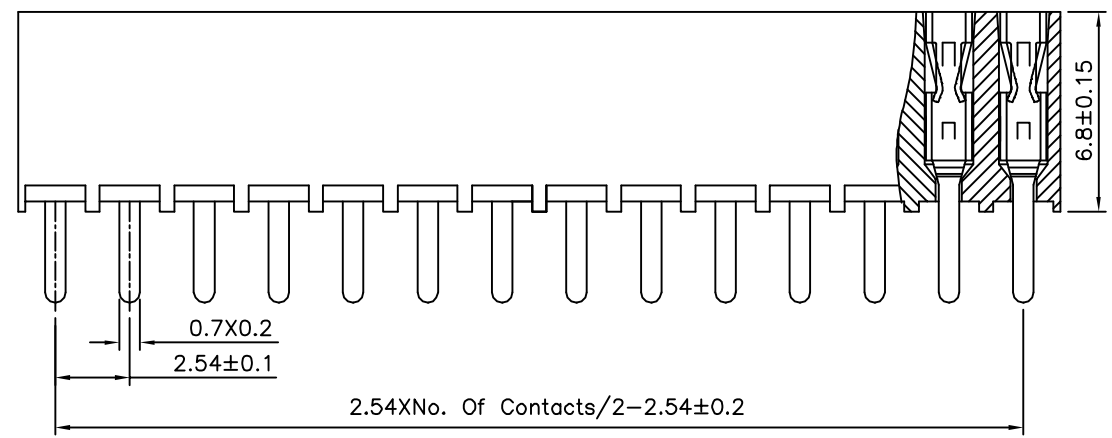

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

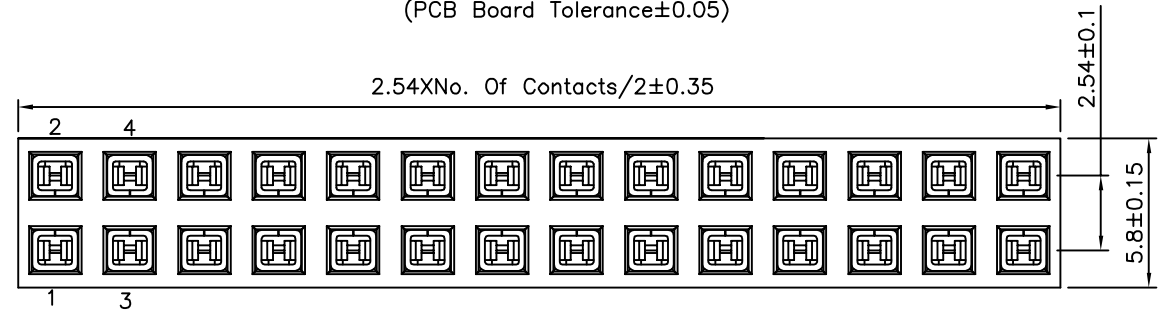

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X." ± 2 " .X ± 0.20 .X" ± 1.5 " .XX ± 0.15 .XX" ± 1 " .XXX ± 0.10 .XXX" ± 0.5 "	
16969		MEI	CHECKED BY		
		HZF	DRAWING BY		
		HAO			
SCALE	NONE	REV.	A0	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	09/04/2015