



File No. 697QI03806 SHEET 1/1

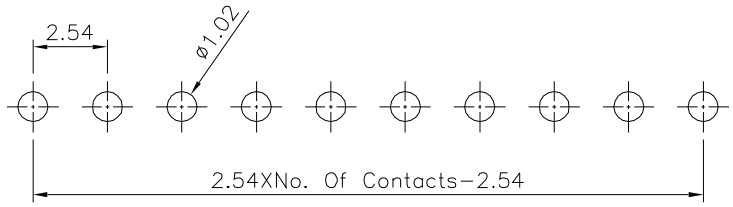

Recommend P.C.B Board Layout
Tolerance:±0.05(Top View)

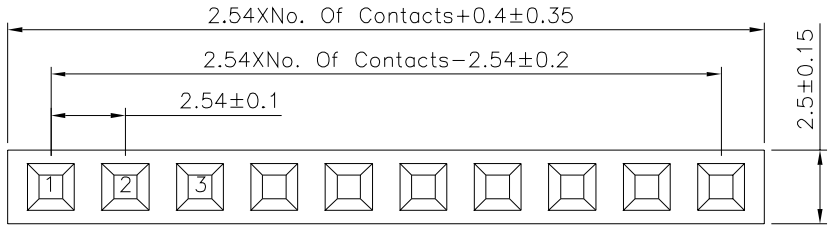

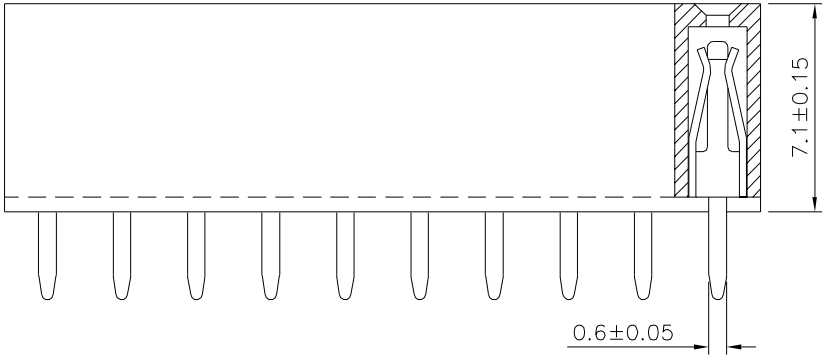

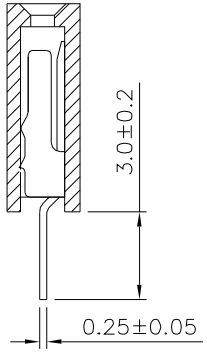

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA9T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	17003
APPROVED BY	Jason Wu
CHECKED BY	Leo Han
DRAWING BY	Michelle Lee
SCALE	NONE
REV.	A0
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	X. ±0.30 X.° ±2° .X ±0.25 .X° ±1.5° .XX ±0.20 .XX° ±1.0° .XXX ±0.15 .XXX° ±0.5°
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	03/03/2026