


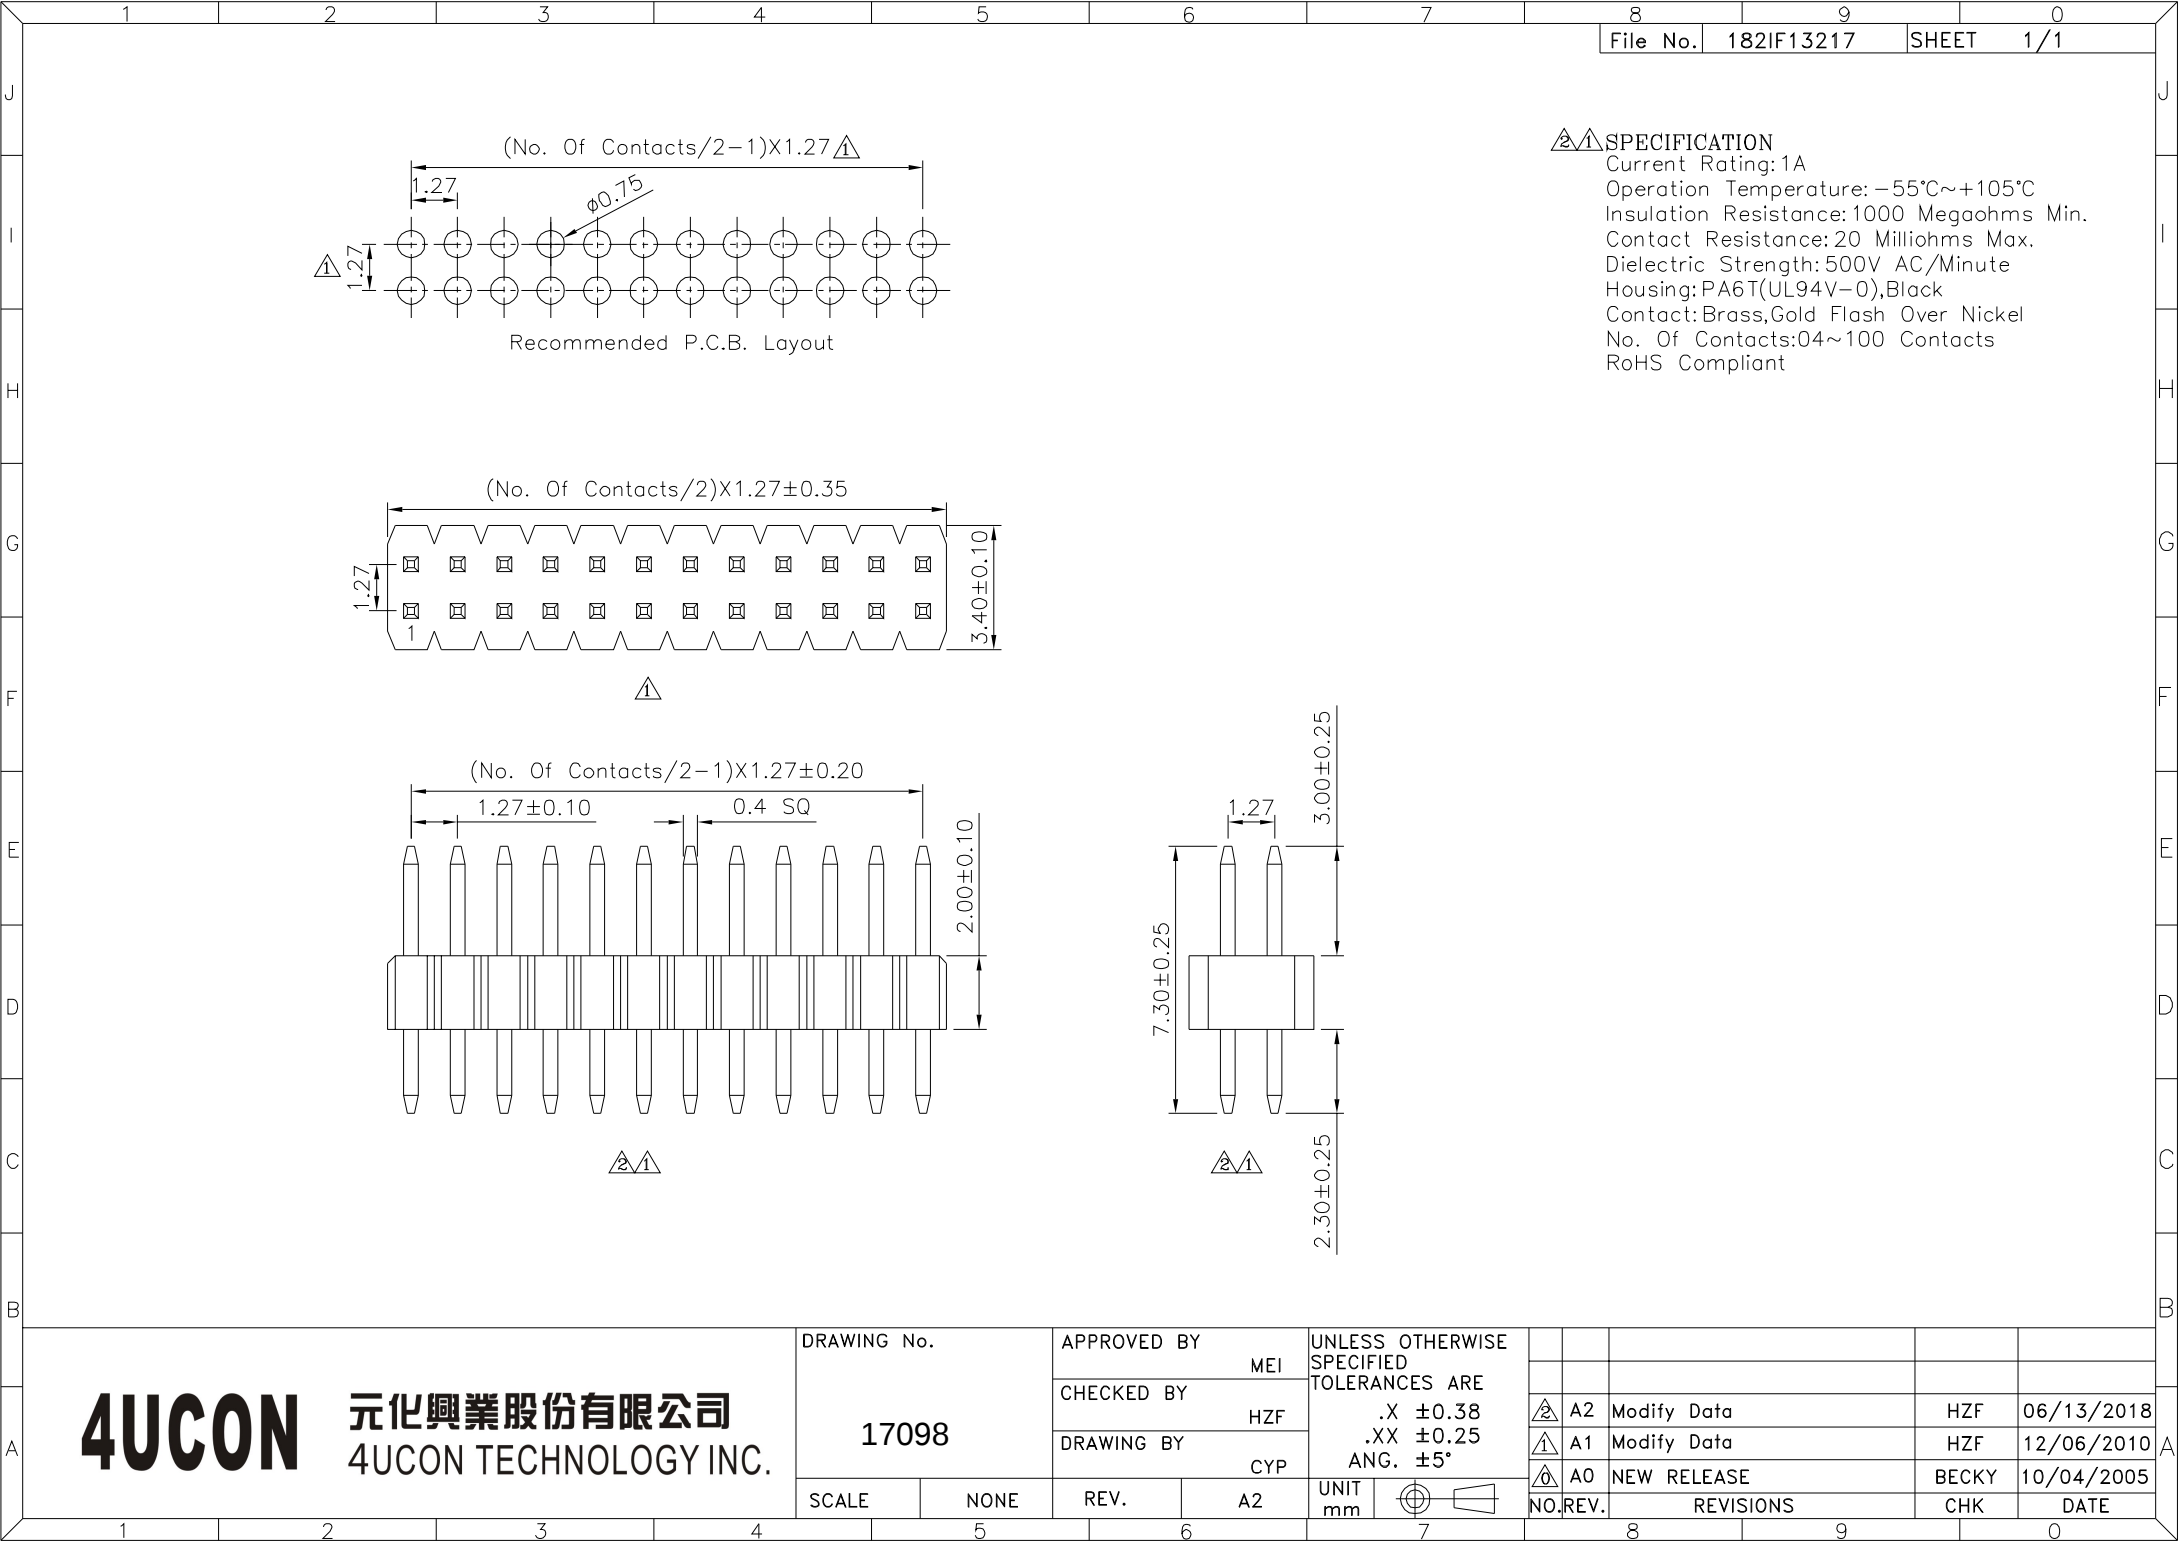

SPECIFICATION
Current Rating: 1A
Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Insulation Resistance: 1000 Megaohms Min.
Contact Resistance: 20 Milliohms Max.
Dielectric Strength: 500V AC/Minute
Housing: PA6T(UL94V-0), Black
Contact: Brass, Gold Flash Over Nickel
No. Of Contacts: 04~100 Contacts
RoHS Compliant