


MATERIALS
 Housing: DSM Stanyl TE250F6(Nylon 66)
 Heat Deflection Temp.290°C
 Black Color,UL94V-0
 Or: Nylon Zytel FR-52
 Heat Deflection Temp.278°C
 Black Color,UL94V-0
 Terminal: 0.35mm Thick Phos-Bronze
 Plated With Hard Gold And
 Tin/Lead In Solder Area
 Hold Down: 0.35mm Thick Copper Alloy,
 Plated With Tin-Lead

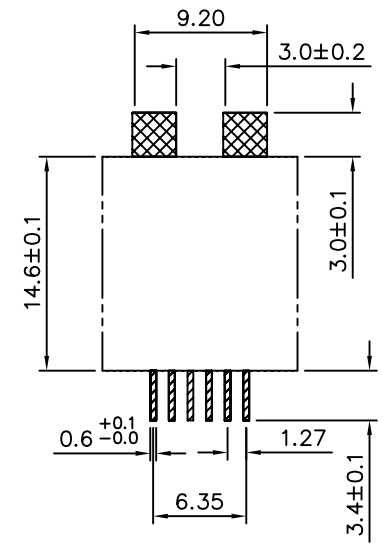

NOTE
 1.A and B highest point must over C flat surface.
 2.The maximum distance(0.15m/m) between lowest and highest on A and B flat surface.

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED					
17108		MEI		TOLERANCES ARE					
		CHECKED BY		.X ±0.25					
		BECKY		.XX ±0.13					
		DRAWING BY		.XXX ±0.05					
		HZF		UNIT					
SCALE	NONE	REV.	A0	mm					
				NO. REV.					
				A0		NEW RELEASE	BECKY	2004/07/16	
				REVISIONS		CHK	DATE		