

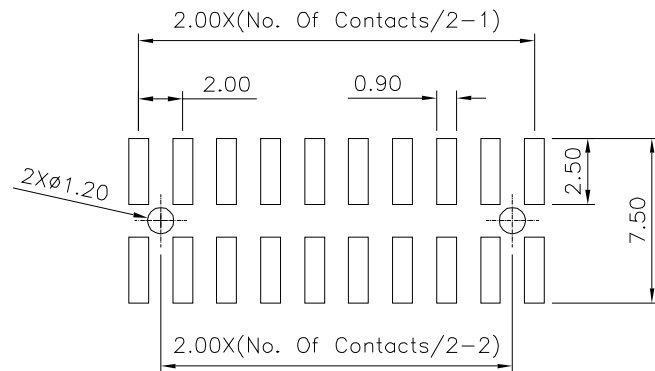
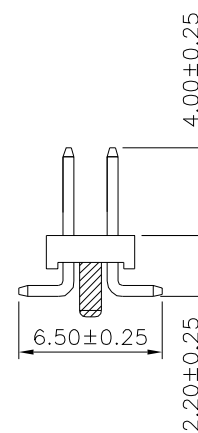


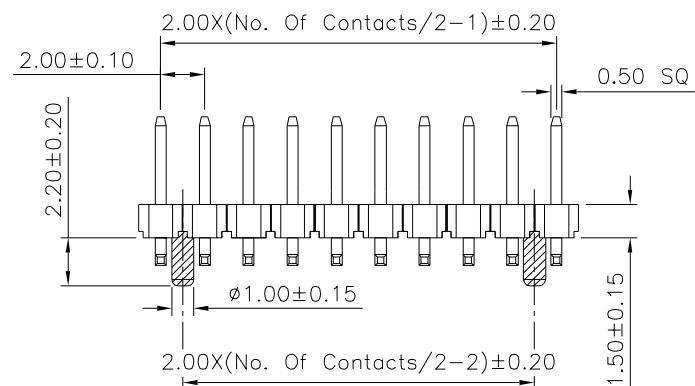

Recommended P.C.B Layout

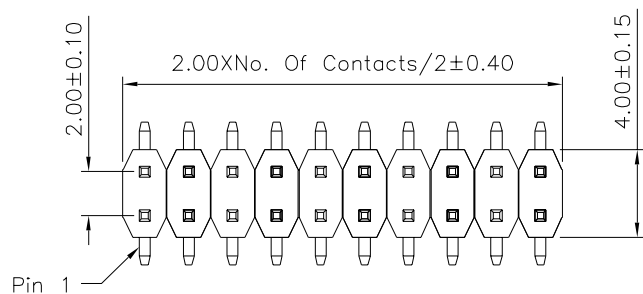

SPECIFICATION

Current Rating:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
① Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~80 Contacts
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

17125

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

GAO


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$$.X \pm 0.38$$

.XX ± 0.25

.XXX ±0.05

	UNIT
	mm



⚠	B1	Modify Data	HZF	11/27/2025
⚠	B0	NEW RELEASE	HZF	06/02/2022
NO.REV.	REVISIONS		CHK	DATE