



File No.	182PK27237	SHEET	1/1

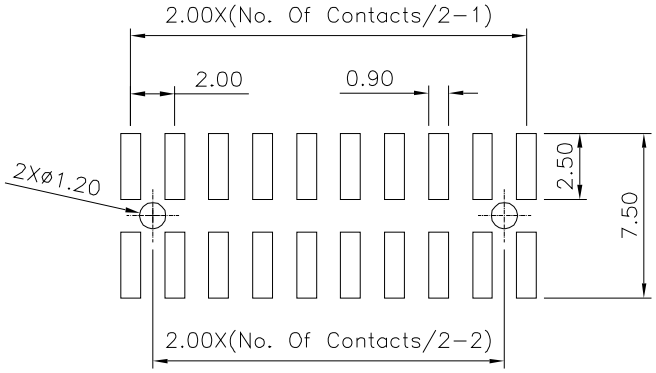

Recommended P.C.B Layout

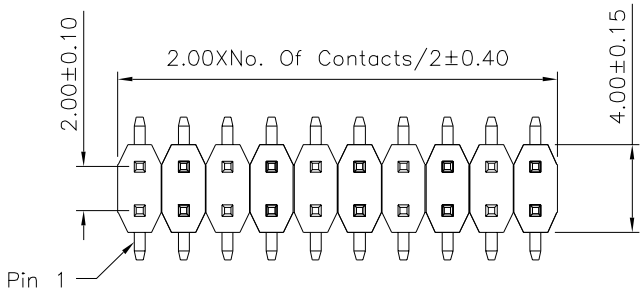

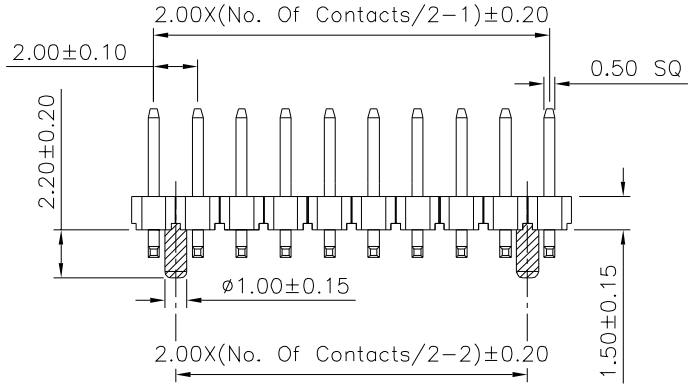

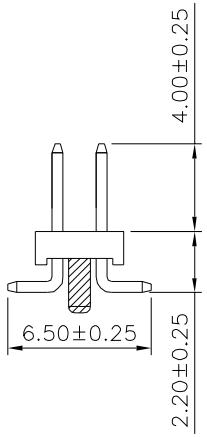

SPECIFICATION

Current Rating:2A
Dielectric Strength:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
1 Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
No. Of Contacts:06~80 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
17144	MEI	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY GAO	.XXX ±0.05
SCALE NONE	REV. B1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	B1	Modify Data	HZF	11/27/2025
0	B0	NEW RELEASE	HZF	06/02/2022