


△ SPECIFICATION
 Rating:100V AC 1A
 Withstand Voltage:500V AC For 1 Minute
 Insulation Resistance:50 Megaohms/500V DC
 A.Sleeve:PE+2L
 B.Housing:ABS
 C.Shell:Brass,Sliver Plated
 D.Housing:PBT
 E.Contact:Brass,Sliver Plated
 RoHS Compliant

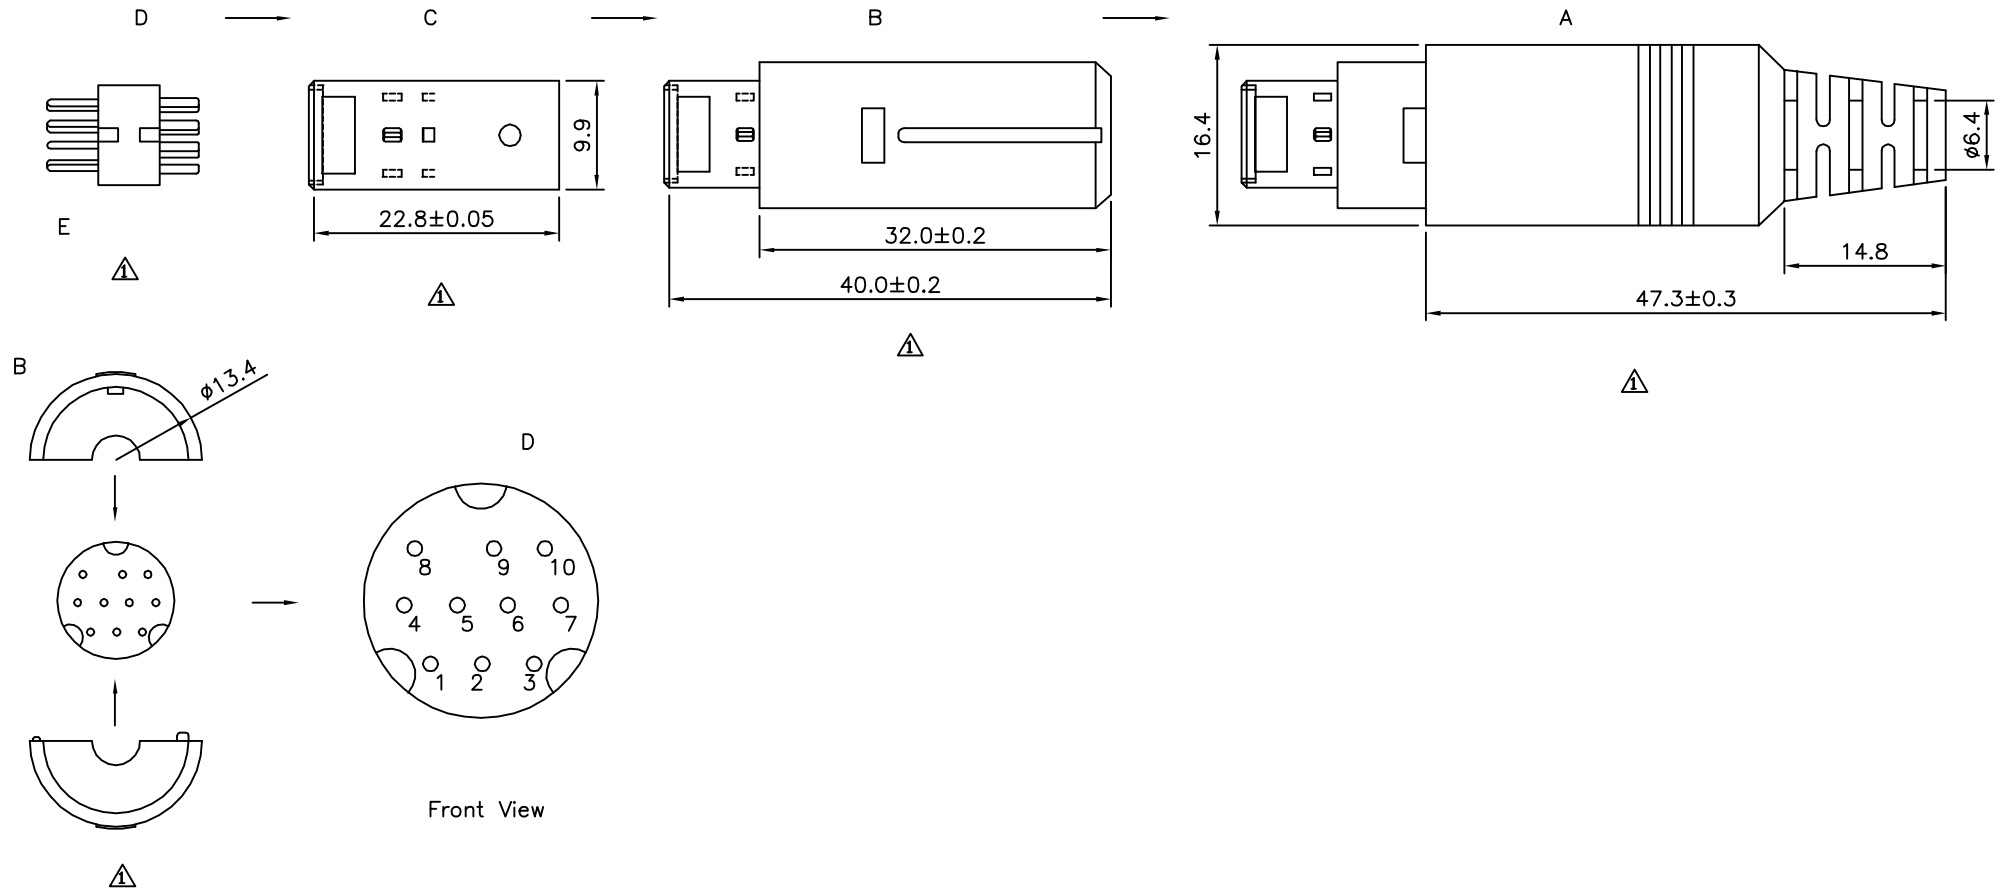

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.1 .XX ±0.05 ANG.
17404		EMILY		
		CHECKED BY		
		HZF		UNIT mm
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/11/2011
△ A0		NEW RELEASE		